



SINGLE PHASE BRIDGE RECTIFIER

**KBPC6005 THRU KBPC610
BR605 THRU BR610**


VOLTAGE RANGE **50 to 1000 Volts**
CURRENT **6.0 Ampere**

FEATURES

- Low cost
- This series in UL recognized under component index, file number E127707
- High forward surge current capacity
- Ideal for printed circuit board
- High isolation voltage from case to leads
- High temperature soldering guaranteed: 260°C / 10 seconds, at 5 lbs. (2.3kg) tension.

MECHANICAL DATA

- Technology: Cell with vacuum soldered
- Case: Molded plastic body
- Terminal: Lead solderable per MIL-STD-202E method 208C
- Polarity: Polarity symbols marked on case
- Mounting: Thru hole for #10 screw, 5 in-lbs torque max.
- Weight: 0.13 ounce, 3.66 gram

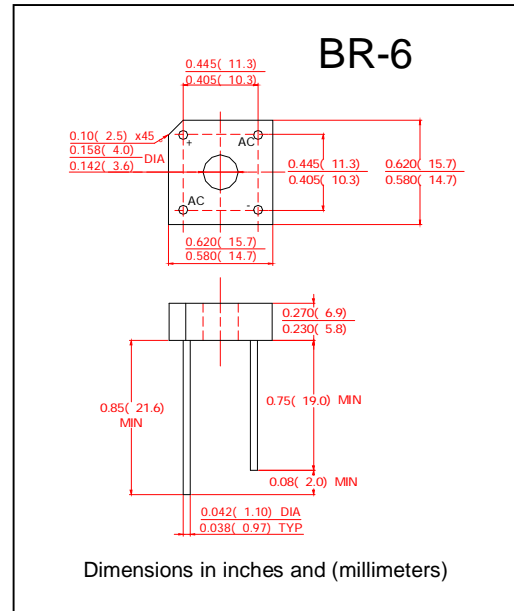

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	KBPC6005 BR605	KBPC601 BR61	KBPC602 BR62	KBPC604 BR64	KBPC606 BR66	KBPC608 BR68	KBPC610 BR610	UNIT	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts	
Maximum Average Forward Rectified Output Current, at	$I_{(AV)}$	$T_C = 50^\circ\text{C}$ (Note 1)	6.0						Amps	
		$T_A = 25^\circ\text{C}$ (Note 2)	3.0							
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}					125				Amps
Rating for Fusing ($t < 8.3\text{mS}$)	I^2t					64				A^2s
Maximum Instantaneous Forward Voltage drop per Bridge element at 3.0 A	V_F					1.0				Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	I_R	$T_A = 25^\circ\text{C}$	5.0						μA	
		$T_A = 100^\circ\text{C}$	1.0						mA	
Isolation Voltage from case to lug	V_{ISO}					2500				Volts
Typical Thermal Resistance (Note 1)	$R_{\theta Jc}$					8.0				$^\circ\text{C}/\text{W}$
Operating Temperature Rang	T_J					-55 to +150				$^\circ\text{C}$
Storage Temperature Rang	T_{STG}					-55 to +150				$^\circ\text{C}$

Notes:

1. Unit mounted on 6.0" x 5.5" x 0.11" thick (15x14x0.3cm) AL plate
2. Unit mounted on P.C. Board 0.375" (9.5mm) lead length with 0.47" x 0.47" (12x12mm) copper pads.




SINGLE PHASE BRIDGE RECTIFIER

**KBPC6005 THRU KBPC610
BR605 THRU BR610**


VOLTAGE RANGE	50 to 1000 Volts
CURRENT	6.0 Ampere

RATINGS AND CHARACTERISTIC CURVES KBPC6005 THRU KBPC610


**FIG.1- DERATING CURVE FOR
OUTPUT RECTIFIED CURRENT**

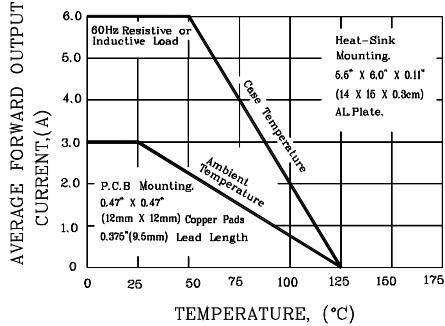


**FIG.2- MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT PER ELEMENT**

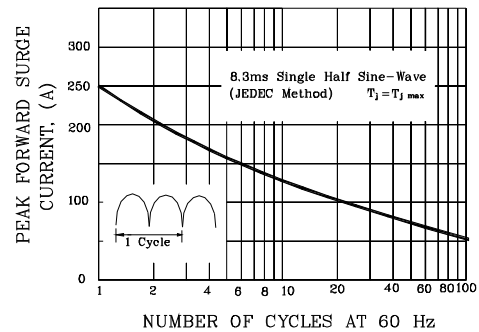

**FIG.3- TYPICAL FORWARD CHARACTERISTICS
PER BRIDGE ELEMENT**

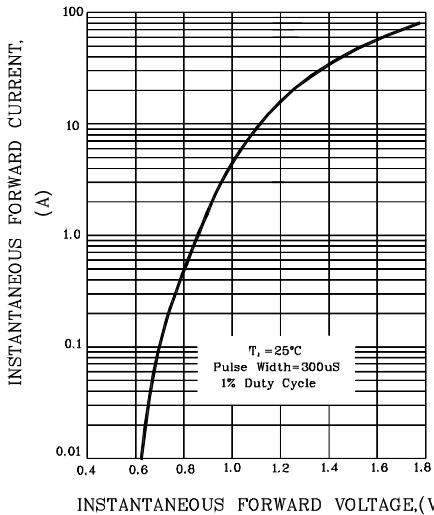

**FIG.4- TYPICAL REVERSE CHARACTERISTICS
PER BRIDGE ELEMENT**

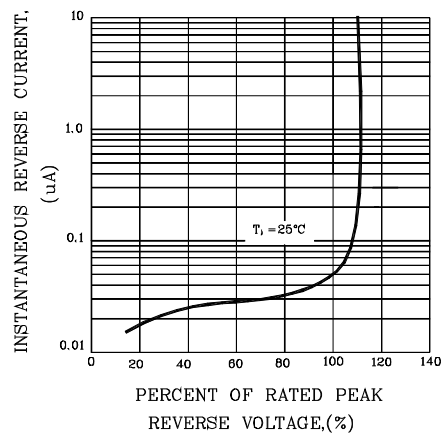

**FIG.5- TYPICAL JUNCTION CAPACITANCE
PER BRIDGE ELEMENT**

