

KK8031-XX

**FEATURES**

- 127-note ROM memory
- 2.0V to 5.0V power supply and low power consumption
- RC oscillator on chip
- One shot or level hold mode (mask option)
- Sound range: 2.5 octaves, 2 series
- Tempo: 16 kinds (presto-largo)
- Double sound sources
- Digital Envelope Effect

**FUNCTIONS**


- Dynamic speaker can be driven with external NPN transistor
- Power on reset; melody begins from the first note
- Start from the head of melody
- Bare chip or TO-92 are available

**DESCRIPTION**

The KK8031-XX is a CMOS LSI chip, which plays a prearranged melodies. The ROM has a 127 words and can store up to two melodies with double sound sources, and it uses the built-in digital envelope circuit.

**SONG LIST**

01	For Elise
02	Ding - Dong
03	Westminster
04	One Ding - Dong
05	It's Small World

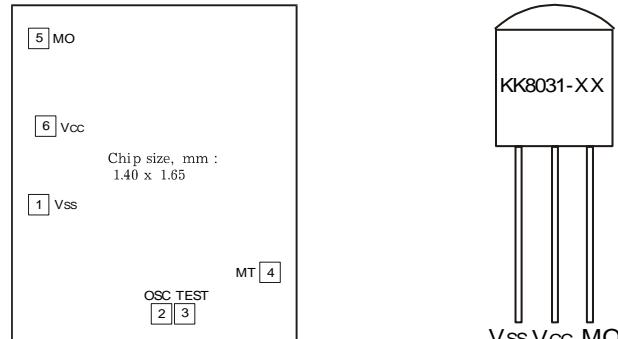**PIN CONFIGURATION**

CHIP

TO-92


**ELECTRICAL CHARACTERISTICS** ( $V_{CC} = 3V$ ,  $V_{SS} = 0V$ ,  $T_a = 25^\circ C$ ; unless otherwise specified)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Operating Voltage	$V_{CC}$		2.0	3.0	5.0	V
Supply Current	$I_S$		-	5	1	mA
Operating		Output open	0.6			
Output Drive Current	$I_{OH}$	$V_{CC} = 3V$ , $V_O = 0.8V$	0.5	0.5		mA
Output Sink Current	$I_{OL}$	$V_{CC} = 3V$ , $V_O = 0.5V$	0.5	0.5		mA
Input Current MT	$I_I$	$V_{IN} = V_{CC}$	0.5		3.0	A
Frequency Stability	$\Delta F/F$	$F_{osc}(3V) - F_{osc}(2V)$		-	15	%
		$F_{osc}(3V)$				

\* Only for version "ONE SHOT MODE"

## APPLICATION CIRCUITS


### LEVEL HOLD MODE (TO-92)

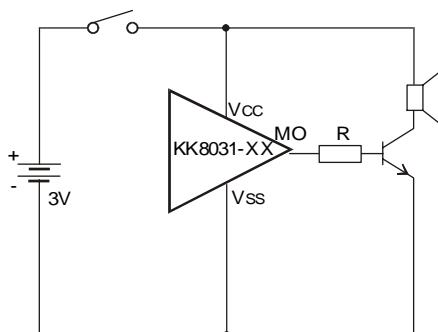



$R = 5 \div 10\text{k}\Omega$

**NOTE:** The chip substrate is connected to V<sub>SS</sub>.

### ONE SHOT MODE (BARE CHIP)

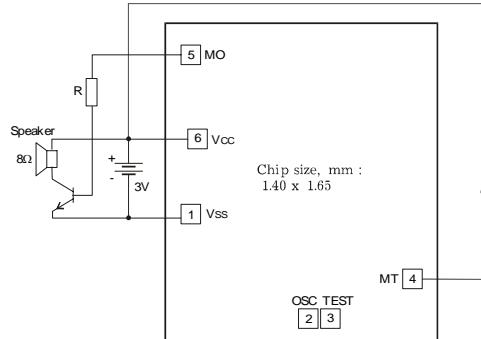


**N SUFFIX PLASTIC DIP  
(MS - 001BA)**

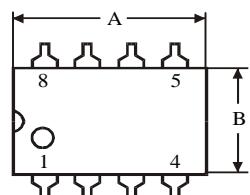

Symbol	Dimension, mm	
	MIN	MAX
<b>A</b>	8.51	10.16
<b>B</b>	6.1	7.11
<b>C</b>		5.33
<b>D</b>	0.36	0.56
<b>F</b>	1.14	1.78
<b>G</b>		2.54
<b>H</b>		7.62
<b>J</b>	$0^\circ$	$10^\circ$
<b>K</b>	2.92	3.81
<b>L</b>	7.62	8.26
<b>M</b>	0.2	0.36
<b>N</b>	0.38	

### NOTES:

- Dimensions "A", "B" do not include mold flash or protrusions.
- Maximum mold flash or protrusions 0.25 mm (0.010) per side.

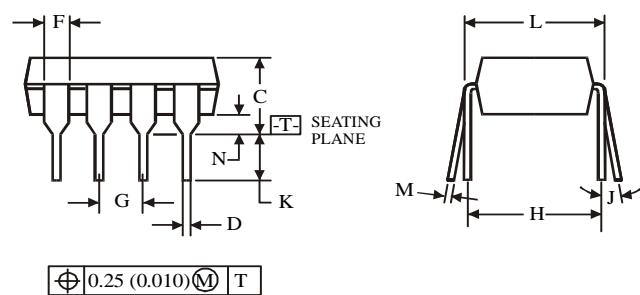

• TO-92

