



1. Mechanical Dimensions:

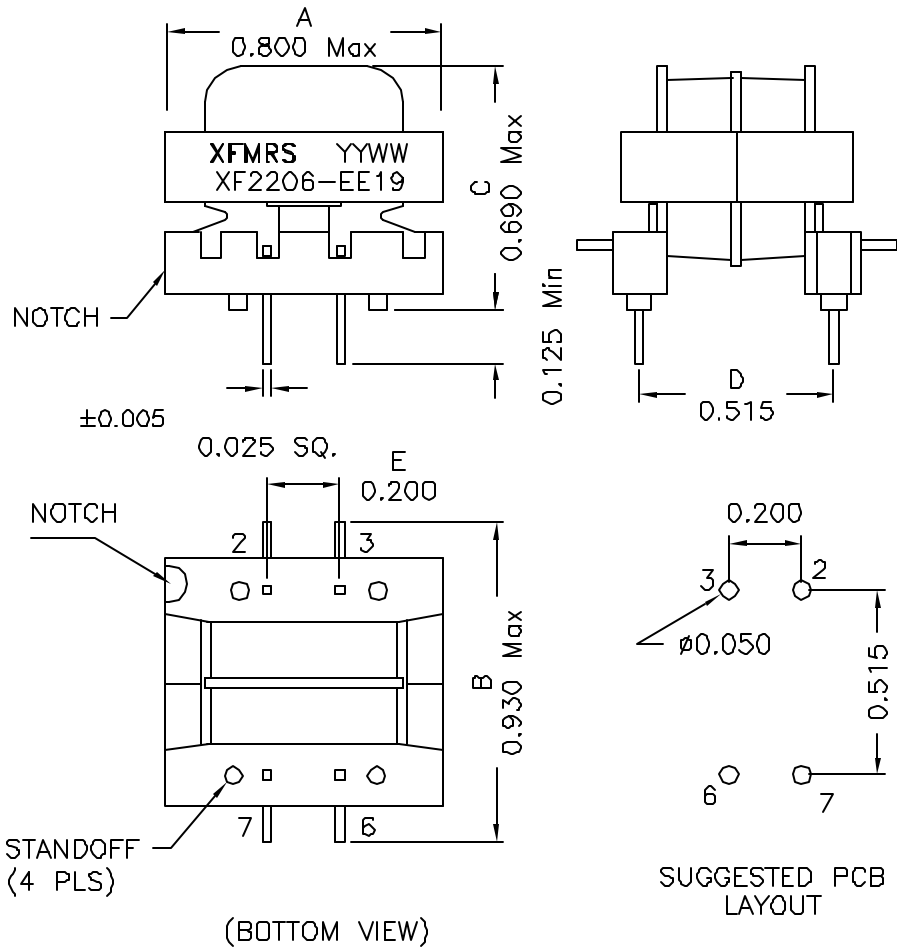

2. Schematic:

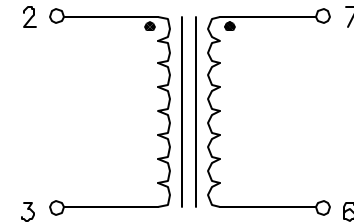


3. Electrical Specifications:

- OCL: 220 μ H \pm 25% @10KHz 0.1V, Each Wdg
- LL: Pins 2-3 9.0 μ H Max @100KHz 0.1V, Short Pins 7-6
- DCR: 0.044 Ohms Max, Each Wdg
- Rated Current: 2.2Aac
- CW/W: Pins 2-7 8.5pF Max @100KHz 0.1V
- HIPOT: 2000Vac Pri to Sec
- Q: Pins 2-3 tbd Min @10KHz 1V

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -55°C to +125°C

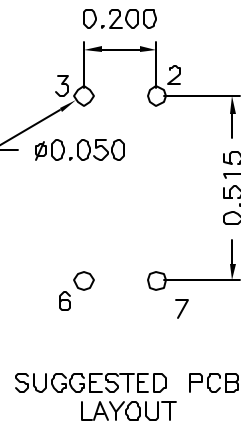

DOC. REV: A/1

XFMRS Inc	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED		P/N: XF2206-EE19 REV. A
TOLERANCES: .xxx \pm 0.010	DWN.	罗振江	May-20-04
Dimensions in Inch	CHK.	廖玉坤	May-20-04
SHEET 1 OF 1	APP.	J Ng	May-20-04