

Approvals



Life expectancy



L-10 LIFE AT 40°C:
80 000 hours

Brushless DC Motor

Electrical protection: impedance protected
Housing material: plastic UL 94 VO
Impeller material: plastic UL 94 VO
Weight: 99 g
Bearing system: ball bearings

Available with:

- Variable speed
- Speed sensor
- Alarm
- IP54 / IP55

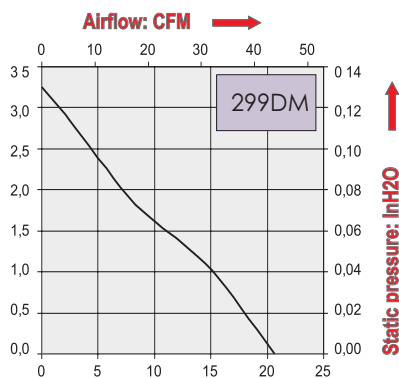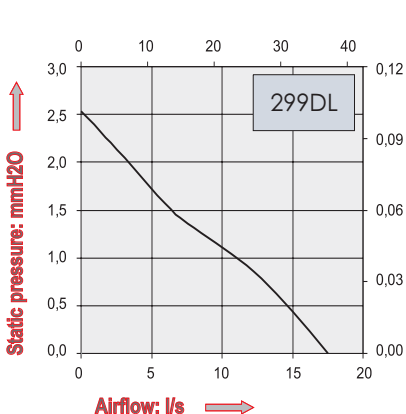

Part Number	Nominal voltage	Airflow	Noise level	Nominal speed	Input Power	Voltage range	Connection type		Operating temperature	
	V						l/s	dB(A)	RPM	W
299DL1LP11000	12	17,5	25	2100	0,8	(7-13,8)	X		-10	70
299DL2LP11000	24	17,5	25	2100	1,4	(14-27,6)	X		-10	70
299DL4LP11000	48	17,5	25	2100	2,4	(38-56)	X		-10	70
299DM1LP11000	12	20,7	30	2400	1,3	(7-13,8)	X		-10	70
299DM2LP11000	24	20,7	30	2400	1,9	(14-27,6)	X		-10	70
299DM4LP11000	48	20,7	30	2400	2,4	(38-56)	X		-10	70

Additional versions:

Higher speeds (see page 22)

Accessories:

Refer to Accessories leaflet