

# Surface Mount High Reliability Mixer

## ADEX-R10LH+

Level 10 (LO Power +10 dBm) 10 to 1000 MHz




### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA


### Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

### Outline Drawing

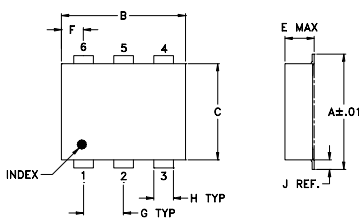

### PCB Land Pattern




Suggested Layout,  
Tolerance to be within ±.002

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.20		

### Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

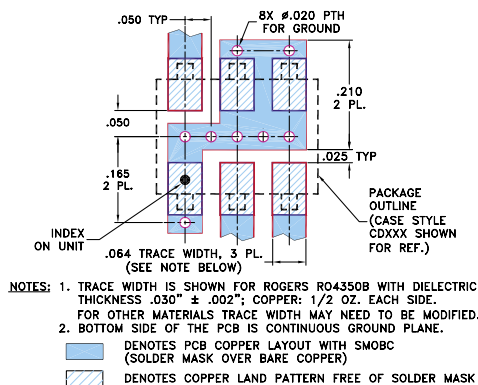

### Features

- hermetically sealed ceramic quad
- low conversion loss, 7.0 dB typ.
- excellent L-R isolation, 60 dB typ.
- good VSWR, 1.8:1 typ. for LO, 1.5:1 typ. for RF, 1.5:1 typ. for IF
- good performance to 1500 MHz
- low profile package
- aqueous washable
- protected by US Patent 6,133,525 and 6,947,717

### Applications

- cellular
- instrumentation
- VHF/UHF receivers

CASE STYLE: CD542  
PRICE: \$3.35 ea. QTY. (10-49)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

### Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)						
		L	M	U	L	M	U							
LO/RF $f_L$ - $f_U$	Mid-Band $m$ $\bar{X}$ $\sigma$ Max. Total Range Max.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ.						
10-1000	DC-800	70	55	60	43	47	37	45	32	35	25	26	17	16

1 dB COMP.: +5 dBm typ.

\*Conversion loss increases 0.5 when IF is above 150 MHz

L = low range [ $f_L$  to  $10 f_L$ ]

M = mid range [ $10 f_L$  to  $f_U/2$ ]


U = upper range [ $f_U/2$  to  $f_U$ ]

m = mid band [ $2 f_L$  to  $f_U/2$ ]

### Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)	
						RF
10.10	40.10	6.40	70.41	63.96	1.40	1.53
70.10	100.10	7.05	71.47	48.53	1.41	1.51
130.10	160.10	7.08	67.22	44.08	1.42	1.52
190.10	220.10	6.89	66.26	42.14	1.42	1.50
250.10	280.10	7.03	65.92	42.34	1.44	1.52
310.10	340.10	6.97	64.97	41.47	1.46	1.55
370.10	400.10	7.00	61.87	40.62	1.49	1.57
430.10	460.10	6.96	60.97	38.57	1.51	1.60
490.10	520.10	7.00	62.56	37.21	1.53	1.65
550.10	580.10	7.16	56.40	35.22	1.56	1.69
610.10	640.10	7.09	52.53	33.19	1.55	1.72
670.10	700.10	6.94	55.81	31.14	1.54	1.74
730.10	760.10	7.16	77.09	30.24	1.58	1.81
790.10	820.10	7.30	57.93	30.30	1.61	1.86
850.10	880.10	7.52	52.89	30.93	1.64	1.89
910.10	940.10	7.81	50.96	30.99	1.65	1.92
970.10	1000.10	7.81	55.37	29.61	1.62	1.94
1030.10	1060.10	7.66	61.99	27.44	1.54	1.96
1090.10	1120.10	7.44	62.69	25.31	1.43	1.99
1150.10	1180.10	7.17	51.89	23.66	1.32	2.06

### Electrical Schematic

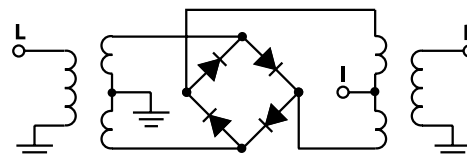

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. OR  
M109914  
ADEX-R10LH+  
ED-12873/5  
WL/TD/QL  
070516  
Page 1 of 2

