

LED DOT MATRIX
BL-M15X882XX
Features:

- 38.00mm (1.5") F 3.7 dot matrix LED display
- Low current operation.
- Excellent character appearance.
- Easy mounting on P.C. Boards or sockets.
- I.C. Compatible.
- ROHS Compliance.


Electrical-optical characteristics: (Ta=25 ° C) (Test Condition: IF=20mA)

| Part No | | Chip | | | VF Unit:V | | Iv TYP.(mcd) |
|-----------------------------|-----------------------------|---------------|-----------|------------------------|-----------|------|--------------|
| Row Cathode Column Anode | Row Anode Column Cathode | Emitted Color | Material | λ _p (nm) | Typ | Max | |
| BL-M15A882SG-XX | BL-M15B882SG-XX | Super Red | AlGaInP | 660 | 2.10 | 2.50 | 250 |
| | | Green | GaP/GaP | 570 | 2.20 | 2.50 | 195 |
| BL-M15A882EG-XX | BL-M15B882EG-XX | Orange | GaAsP/GaP | 635 | 2.10 | 2.50 | 190 |
| | | Green | GaP/GaP | 570 | 2.20 | 2.50 | 195 |
| BL-M15A882DUG-XX | BL-M15B882DUG-XX | Ultra Red | AlGaInP | 660 | 2.10 | 2.50 | 320 |
| | | Ultra Green | AlGaInP | 574 | 2.20 | 2.50 | 250 |
| BL-M15A882UEUG-XX | BL-M15B882UEUG-XX | Ultra Orange | AlGaInP | 630 | 2.10 | 2.50 | 235 |
| | | Ultra Green | AlGaInP | 574 | 2.20 | 2.50 | 250 |

■ -XX: Surface / Lens color :

| Number | 0 | 1 | 2 | 3 | 4 | 5 |
|-------------------|-------------|----------------|--------------|----------------|-----------------|---|
| Ref Surface Color | White | Black | Gray | Red | Green | |
| Epoxy Color | Water clear | White diffused | Red Diffused | Green Diffused | Yellow Diffused | |

■ Absolute maximum ratings (Ta=25°C)



| Parameter | S | G | E | D | UG | UE | | Unit |
|--|---|-----|-----|-----|-----|-----|--|------|
| Forward Current I _F | 30 | 30 | 30 | 30 | 30 | 30 | | mA |
| Power Dissipation P _d | 75 | 80 | 80 | 75 | 75 | 65 | | mW |
| Reverse Voltage V _R | 5 | 5 | 5 | 5 | 5 | 5 | | V |
| Peak Forward Current I _{PF} (Duty 1/10 @ 1KHZ) | 150 | 150 | 150 | 150 | 150 | 150 | | mA |
| Operation Temperature T _{OPR} | -40 to +80 | | | | | | | °C |
| Storage Temperature T _{STG} | -40 to +85 | | | | | | | °C |
| Lead Soldering Temperature T _{SOL} | Max.260±5 ° C for 3 sec Max. (1.6mm from the base of the epoxy bulb) | | | | | | | °C |

LED DOT MATRIX


BL-M15X882XX

■ Package configuration & Internal circuit diagram

BL-M15X882 Series

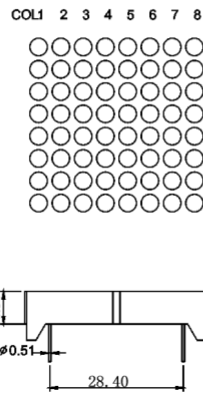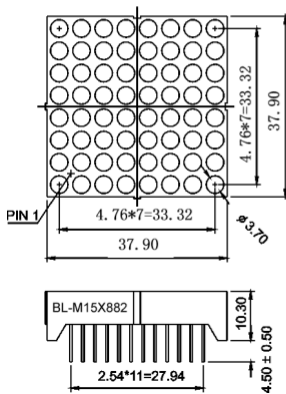


BL-M15A882XX

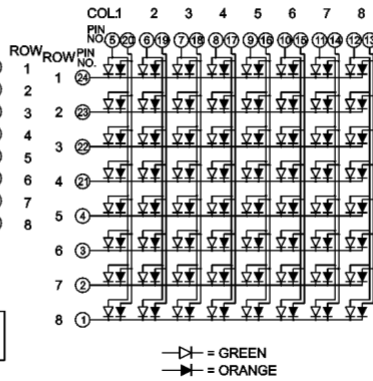

—▷ = GREEN
—▷ = ORANGE

BL-M15B882XX

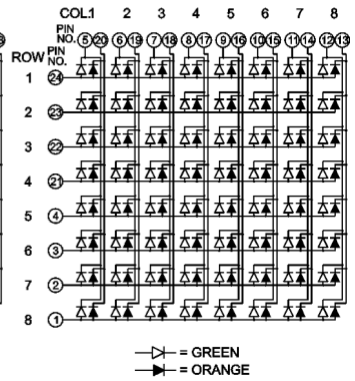

—▷ = GREEN
—▷ = ORANGE


Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Specifications are subject to change without notice.


LED DOT MATRIX

BL-M15X882XX


Typical electrical-optical characteristics curves:

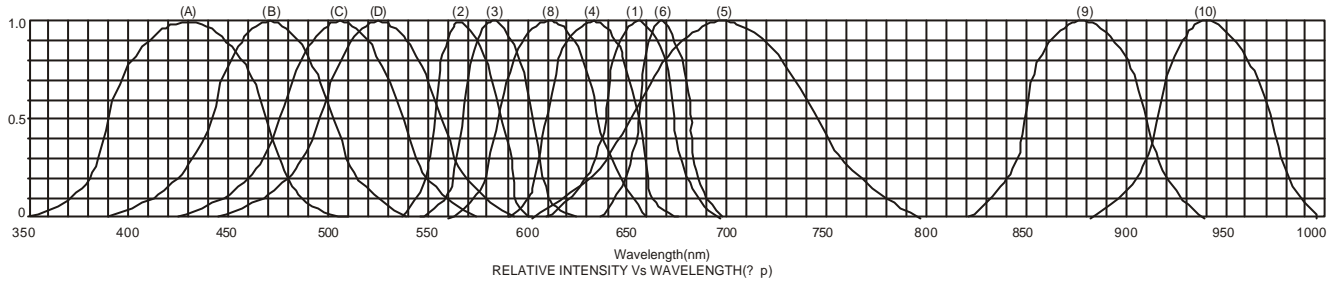


- | | |
|---|--------------------------------------|
| (1) - GaAsP/GaAs 655nm/Red | (9) - GaAlAs 880nm |
| (2) - GaP 570nm/Yellow Green | (10) - GaAs/GaAs & GaAlAs/GaAs 940nm |
| (3) - GaAsP/GaP 585nm/Yellow | (A) - GaN/SiC 430nm/Blue |
| (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B) - InGaN/SiC 470nm/Blue |
| (5) - GaP 700nm/Bright Red | (C) - InGaN/SiC 505nm/Ultra Green |
| (6) - GaAlAs/GaAs 660nm/Super Red | (D) - InGaAl/SiC 525nm/Ultra Green |
| (8) - GaAsP/GaP 610nm/Super Red | |




FORWARD VOLTAGE (Vf)
FORWARD CURRENT VS.
FORWARD VOLTAGE





FORWARD CURRENT (mA)
RELATIVE LUMINOUS
INTENSITY VS. FORWARD
CURRENT

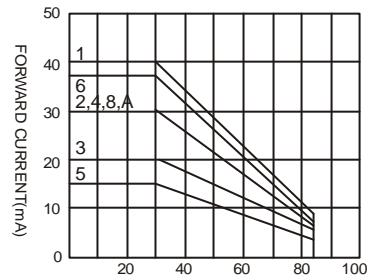

AMBIENT TEMPERATURE Ta()
FORWARD CURRENT VS. AMBIENT
TEMPERATURE

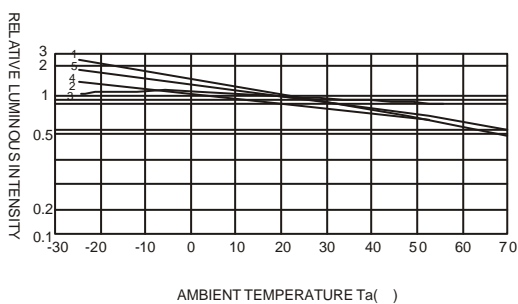

AMBIENT TEMPERATURE Ta()

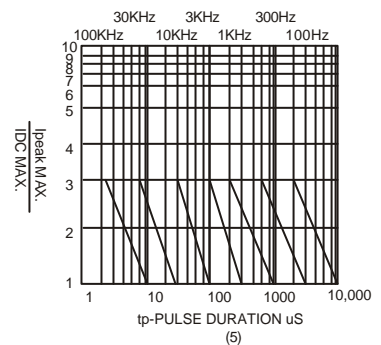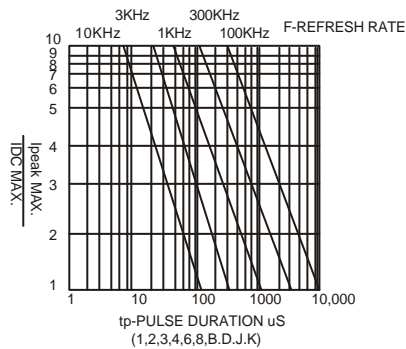

NOTE:25 free air temperature unless otherwise specified