




PIN HEADERS

DUAL ROW RIGHT ANGLE 1.27MM

- Industry compatible
- Competitively priced
- Various plating contacts available
- 1.27mm pitch
- Various pin lengths available

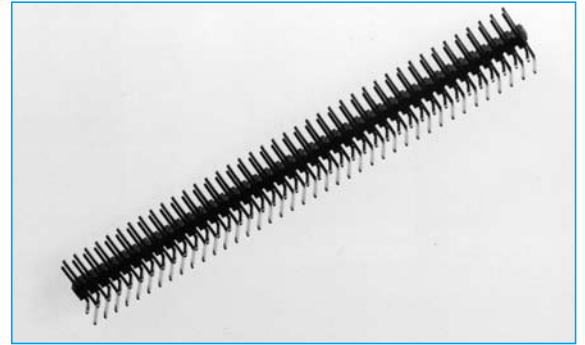


SECTION 8

SPECIFICATION


Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	1000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

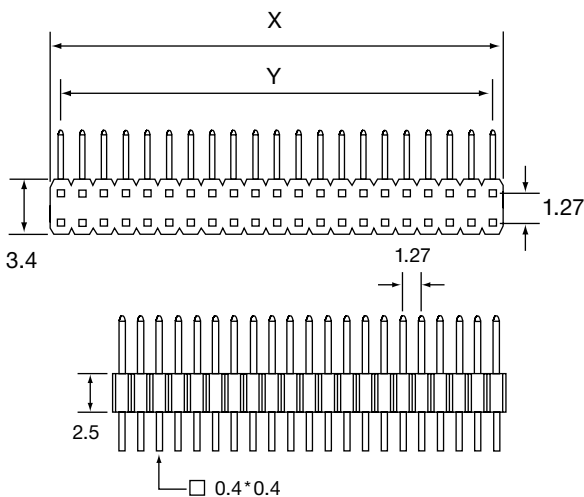

x	1.27 * Position No.
y	1.27 * (Position No.-1)

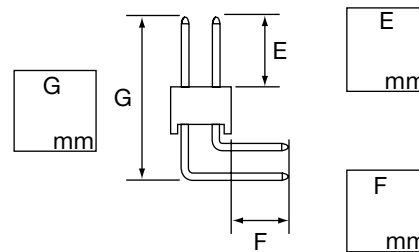

ORDERING INFORMATION

DBC Dubilier Connectors	PH Pin Header Connector	C12 Series	04 No. of Contacts /Per Row 02 = 2x2way thro to 40 = 40x2way	A Contact Material A = Brass	G Contact plating G = Gold Plating S = Selective T = Tin Plating * = Other plating available	1 Colour 1 = Black	-XXX Unique Special Code * See Below
-----------------------------------	-----------------------------------	----------------------	----------------------------------------------------------------------------------	-----------------------------------------------	------------------------------------------------------------------------------------------------------------------------	-------------------------------------	-------------------------------------------------------

* Dubilier will allocate a special code to distinguish special pin lengths