


VDS1706 Receiver Protector

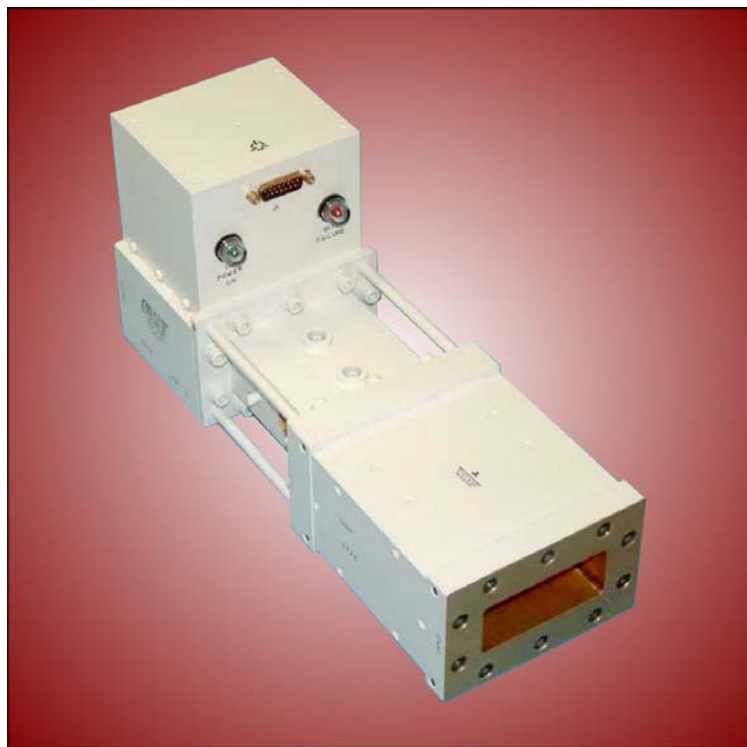

Typical Performance:

- Frequency Range: 2.7 – 2.9 GHz
- Power: 150 kW peak
- Duty Cycle: 0.01 max
- Pulswidth: 10 μ S max
- VSWR: 1.40:1 max
- Insertion Loss: 0.5 dB max
- Passive Leakage:
 - Flat Power: < 100 mW
 - Spike Power: < 250 mW
- Recovery Time (1 dB): 1.5 μ S max
- Isolation when Gate applied: 20 dB min

Description:

S-Band high power passive receiver protector with integral 20 dB gate. This unit also incorporates a BITE circuit which gives a fault indication in the event of high leakage power or a diode failure.

150 Sohier Road
Beverly, Massachusetts 01915



Phone: 978-922-6000 Fax: 978-922-2736
E-Mail: marketing@bmd.cpii.com
Internet: www.cpii.com/bmd