


## Directional Coupler

P/N: JXWBOH-T-10900-12750-10

Frequency Range(GHz)	10.9-12.75
Insertion Loss(dB)	1.0 max
Nominal Coupling(dB)	10
Coupling Accuracy(dB)	+/-1.0 max
Coupling Sensitivity to Frequency(dB)	+/-0.7 max
Directivity(dB)	12 min
VSWR	1.5 max
Operating Temperature(°C)	-40 ~ +70
Impedance(Ohms)	50
Connector	SMA-Female
Finish	Gray Epoxy Paint
Net Weight(Kg)	0.025 Around

### Outline Drawing (Size: mm)

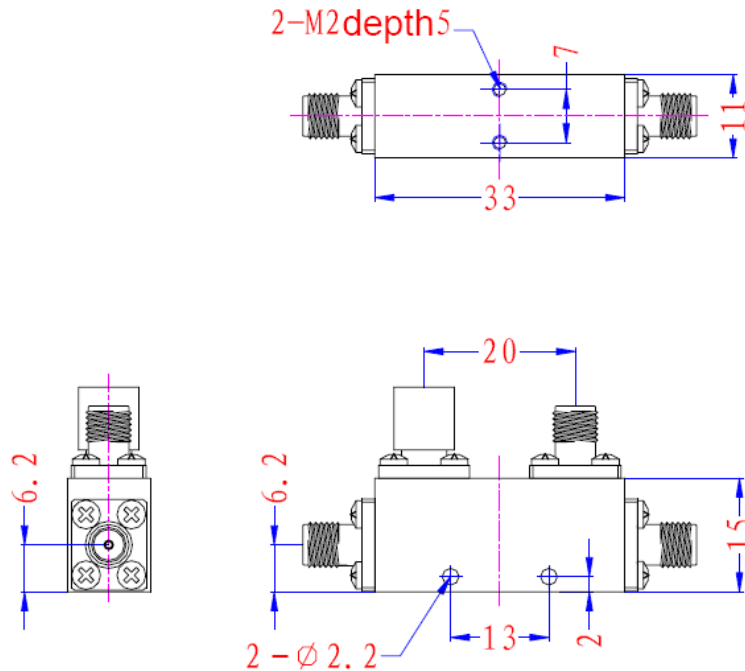

For current data sheets, please contact: [sales@aacix.com](mailto:sales@aacix.com)