




# KK-1364-50

This EMI / RFI filter is intended to provide noise reduction for telecommunications DC power. The components used in the production are capable of passing the UL 707 Volt dielectric withstanding test for telecom equipment. The filter is non-polarized. If modifications are needed to suppress transients, or if more severe temperature operating parameters are required, call or e-mail our Engineering Dept.

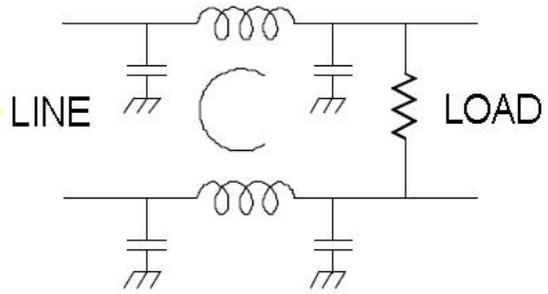

**Operating voltage = 48 Vdc**  
**Maximum sustained input voltage = 400 Vdc**  
**Operating Current = 50 amperes**  
**Temperature Range (operating) = -40 To 55oC**  
**Dielectric withstanding = 707 VDC line-to-case**  
**Temperature range (storage) = -40 to 105oC**

