



# PRODUCT SPECIFICATION

**Model No:CST-S30320M9/S30321M9**

## Descriptions:

- 0.3 Inch Triad Digit SMD Display
- Emitting Color : Super Bright Yellow Green



CUSTOMER APPROVED SIGNATURES	APPROVED BY	CHECKED BY	PREPARED BY

**CHINA SEMICONDUCTOR CORPORATION**  
Address:2FL. NO.909,Chung-Cheng Road,  
Chung-Ho City Taipei Hsien,Taiwan.

Tel:886-2-2223-9696  
Fax:886-2-2223-9377

**OPTO PLUS TECHNOLOGIES CO.,LTD**  
Address:696 Shun jiang Rd.,Ji Shan St.Shaoxing,  
ZheJiang,China

Tel:86-0575-88623888  
Fax:86-0575-88623112



**Model No : CST-S30320/S30321M9**


**Features -**

1. 0.3 inch (7.62mm) digit height.
2. Qualified according to JEDEC moisture sensitivity Level 2a.
3. RoHS compliant.
4. Low power consumption.
5. Easy mounting on P.C. board.

**Device Selection Guide -**

Model No.	Chip		Description
	Material	Emitting Color	
<b>CST-S30320M9</b>	<b>AlGaInP</b>	<b>Super Bright Green</b>	<b>Common Anode</b>
<b>CST-S30321M9</b>	<b>AlGaInP</b>	<b>Super Bright Green</b>	<b>Common Cathode</b>

**Mechanical Dimensions -**

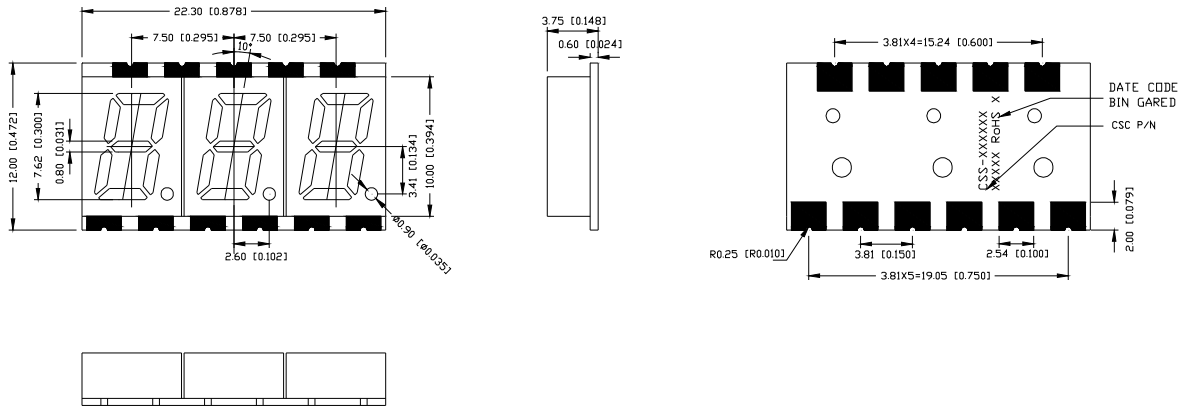


Notes:  
All dimensions are in millimeters [inches],  
and tolerance is ±0.25 [0.010]  
unless otherwise noted.



Model No : CST-S30320/S30321M9

Internal Circuit Diagrams -

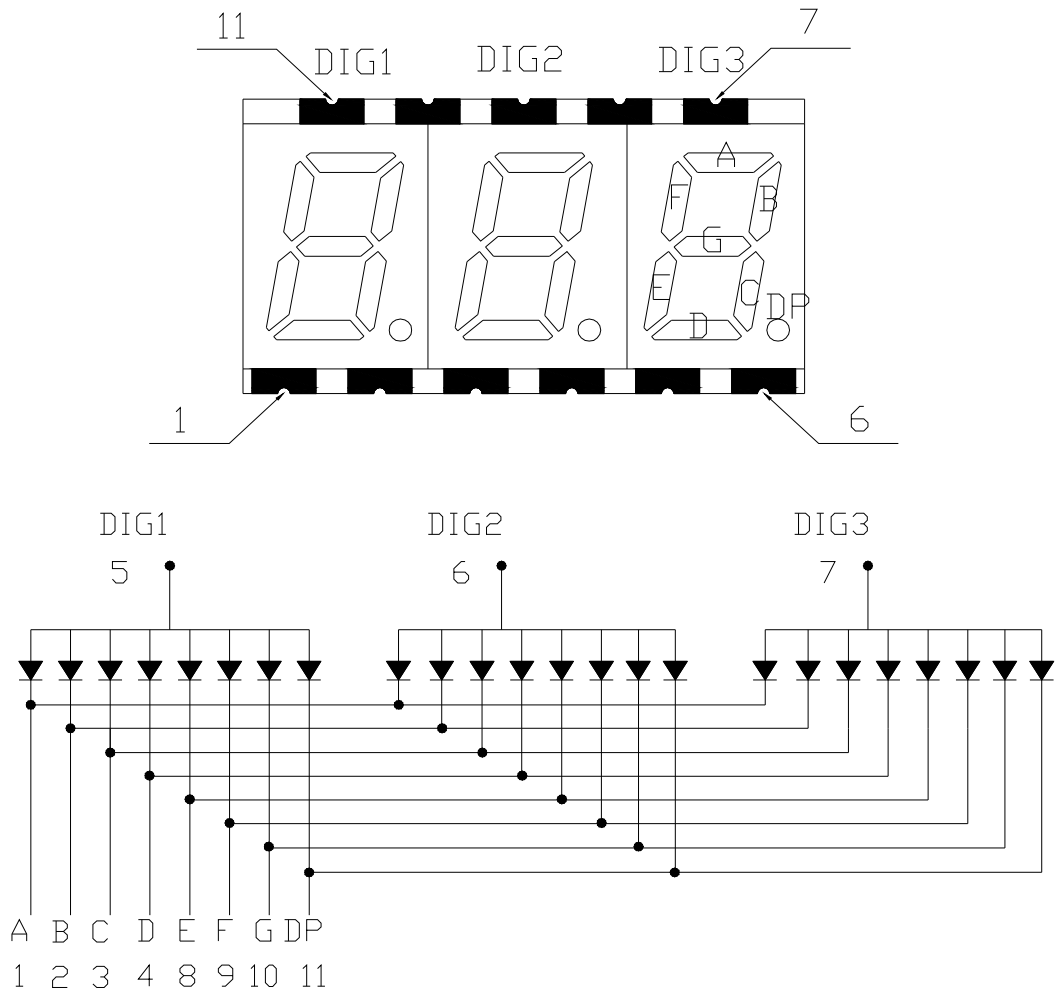

CST-S30320 Common Anode  
(CST-S30321 Common Cathode)



Model No : CST-S30320/S30321M9

■ Absolute Maximum Rating -

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Power Dissipation Per Dice	<b>P<sub>AD</sub></b>	70	mW
Continuous Forward Current Per Dice	<b>I<sub>AF</sub></b>	25	mA
Peak Current Per Dice(duty cycle 1/10,1KHz)	<b>I<sub>PF</sub></b>	90	mA
Derating Linear From 25°C Per Dice	-	0.33	mA/°C
Reverse Voltage Per Dice	<b>V<sub>R</sub></b>	5	V
Operating Temp.	<b>T<sub>opr</sub></b>	-40 ~ +105	°C
Storage Temp.	<b>T<sub>stg</sub></b>	-40 ~ +105	°C

■ Electro-optical Characteristics -

(Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Voltage Per Segment	<b>V<sub>F</sub></b>	-	2.1	2.8	V	I <sub>F</sub> =20mA
Luminous Intensity Per Segment	<b>I<sub>v</sub></b>	4	10	-	mcd	I <sub>F</sub> =10mA
Peak Emission Wavelength	<b>λ<sub>P</sub></b>	-	572	-	nm	I <sub>F</sub> =20mA
Spectrum Radiation Bandwidth	<b>Δλ</b>	-	20	-	nm	I <sub>F</sub> =20mA
Reverse Current	<b>I<sub>R</sub></b>	-	-	100	μA	V <sub>R</sub> =5V
Luminous Intensity Matching Ratio	<b>I<sub>V-m</sub></b>	-	-	2:1	-	I <sub>F</sub> =10mA



**Model No : CST-S30320/S30321M9**

**Typical Electrical / Optical Characteristics Curves -**

**(Ta = 25°C Unless Otherwise Noted)**

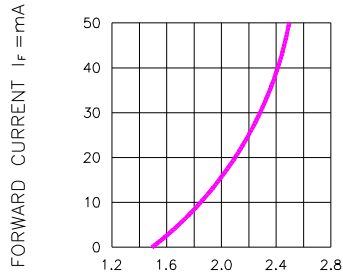


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

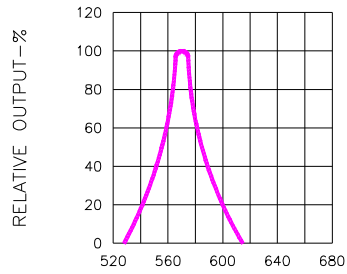


Fig.2 SPECTRAL RESPONSE

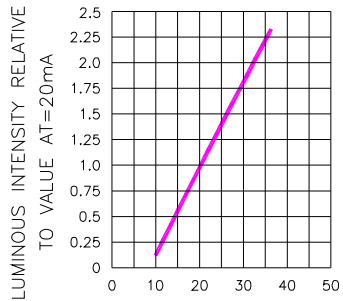


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

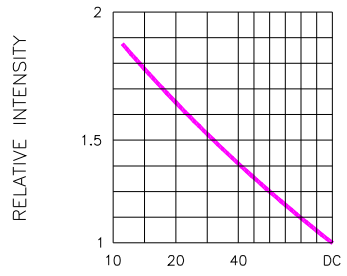


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

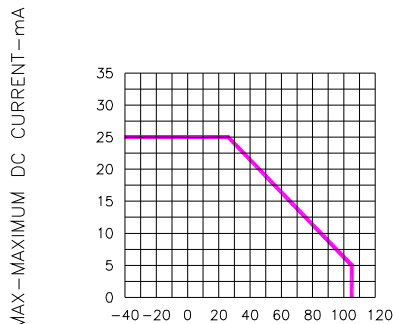


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE

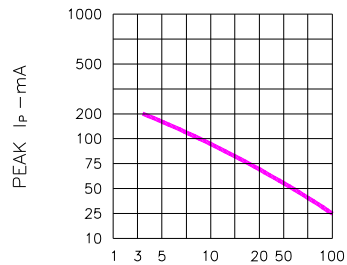



Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE f=1 KHz)



Model No : CST-S30320/S30321M9

## SMT REFLOW SOLDERING INSTRUCTIONS

### IR Reflow Temperature / Time :

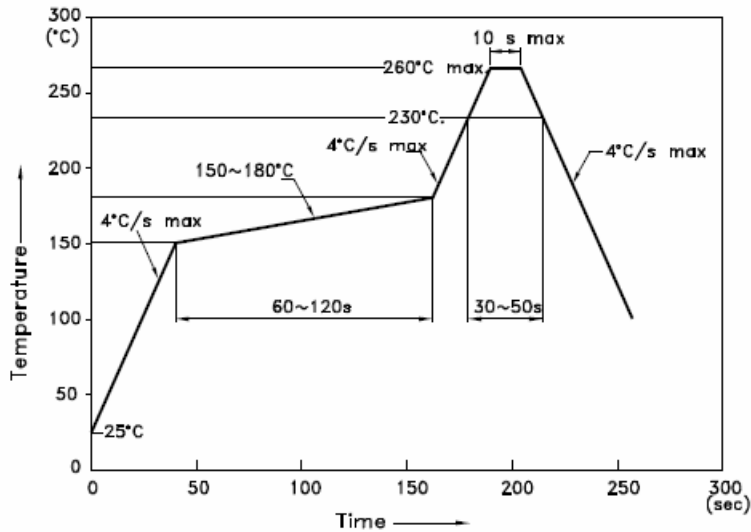

#### NOTES:

1. We recommend the reflow temperature 245°C(+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.


### Soldering Pad Size






Model No : CST-S30320/S30321M9

### REEL DIMENSIONS

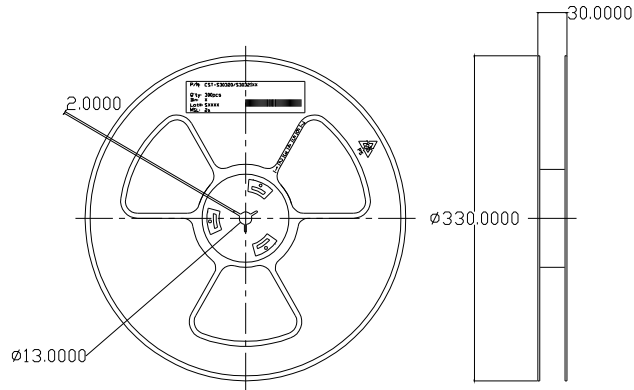

### PACKING & LABEL SPECIFICATIONS

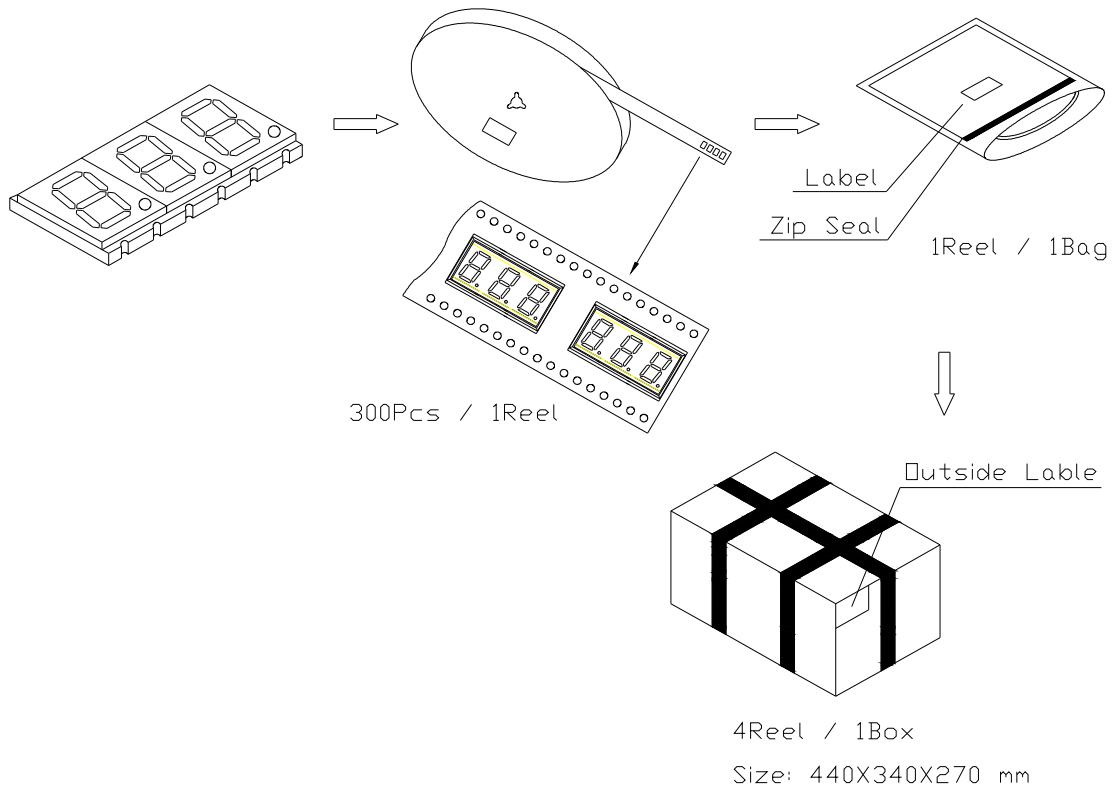

Note: The specifications are subject to change without notice. Please contact us for updated