

## Product Data Sheet


Part No. PB-2312 Non-Washable Type

### DIMENSIONS

PB-2312



φ 22.7 × H12.2

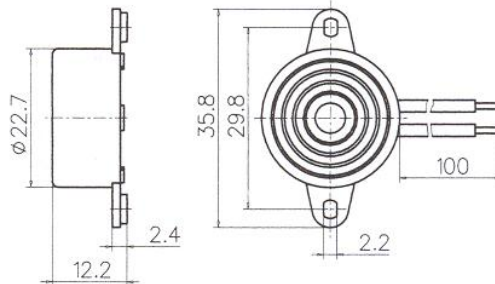

Type	Unit	PB-2312-1
Rated Voltage	(VDC)	12
Operating Voltage	(VDC)	3~20
Current Consumption	(mA)	< or = 8
Sound Output (Min)	(dB)	> or = 85
Resonant Frequency	(Hz)	3000±500
Pulse Rated	(Pulse/Sec)	NIL
Tone		Single
Terminal		LEAD/PIN
Operating Temp	(C)	-20~+60
Storage Temp	(C)	-30~+70
Dimension	mm	22.7 x H12.2
*Value applying at rated voltage		
*distance for measurement 30cm		

Type	Unit	PB-2312-2
Rated Voltage	(VDC)	12
Operating Voltage	(VDC)	3~20
Current Consumption	(mA)	< or = 8
Sound Output (Min)	(dB)	> or = 90
Resonant Frequency	(Hz)	4500±500
Pulse Rated	(Pulse/Sec)	NIL
Tone		Single
Terminal		LEAD/PIN
Operating Temp	(C)	-20~+60
Storage Temp	(C)	-30~+70
Dimension	mm	22.7 x H12.2
*Value applying at rated voltage		
*distance for measurement 30cm		