



### 1. Mechanical:

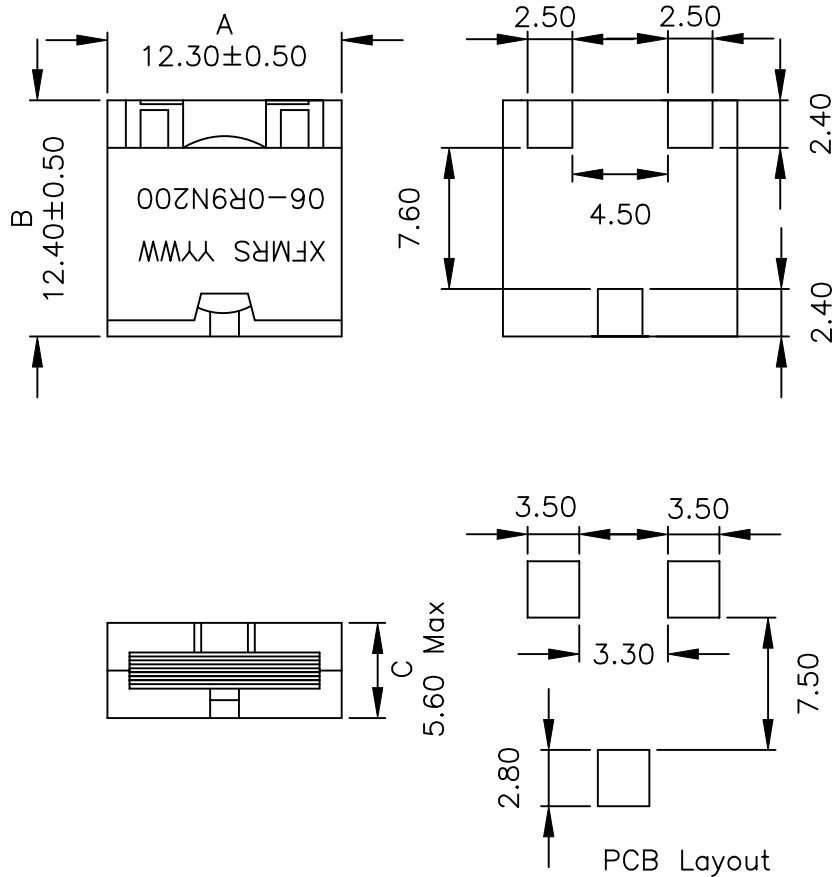

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Operating Temperature Range: -25°C to +105°C

### 2. Schematic:



### 3. ELECTRICAL SPECIFICATIONS: @25°C

OCL: 0.90uH ± 20% @100KHz, 0.10V, 0DC  
 CURRENT: 20 ADC Max, OCL DROP BY 25% Max  
 DC Res.: 2.8mOhms Max

DOC. REV A/1

<b>XFMRs Inc</b>	Title: <b>SM INDUCTOR</b>		
	UNLESS OTHERWISE SPECIFIED	P/N: XF121206-0R9N200	REV. A
TOLERANCES: .xx ±0.25	DWN.	李小锋	Mar-15-04
Dimensions in mm	CHK.	康玉坤	Mar-15-04
SHEET 1 OF 1	APP.	BW	Mar-15-04