


## Hybrid Coupler

P/N: JXWBHL-0825-3-N

|                       |               |
|-----------------------|---------------|
| Frequency Range(MHz)  | 800-2500      |
| Coupling(dB)          | 3.1±0.2       |
| Sensitivity(dB)       | ±0.3          |
| Input Isolation(dB)   | 25 min        |
| Dissipative Loss(dB)  | 0.25          |
| Average Power(W)      | 120           |
| Peak Power(KW)        | 1.5           |
| VSWR                  | 1.2:1         |
| Impedance(Ohm)        | 50            |
| Connector             | N-Female      |
| Temperature Range(°C) | -25 ~ +75     |
| PIM(dBc)              | -130(43dBmx2) |

### Outline Drawing (Size: mm)

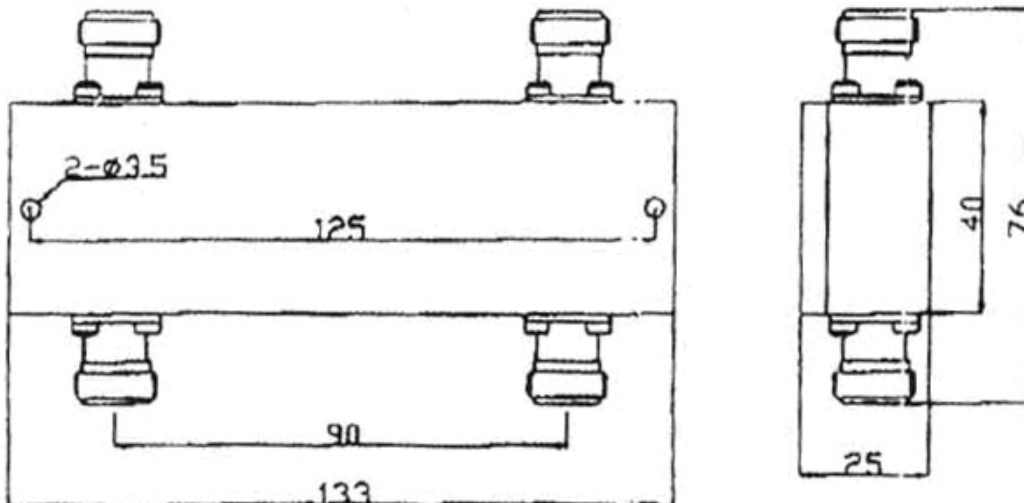

For current data sheets, please contact: [sales@aacix.com](mailto:sales@aacix.com)