

SKR 16,3 x 18,2 Qu bond



DIODE

$$I_{F(DC)} = 365 \text{ A}$$

$$V_{RRM} = 1600 \text{ V}$$

Size: 16,3 mm x 18,2 mm

SKR 16,3 x 18,2 Qu bond

Features

- high current density due to mesa technology
- high surge current
- compatible to thick wire bonding
- compatible to all standard solder processes

Typical Applications


- uncontrolled rectifier bridges

Absolute Maximum Ratings			
Symbol	Conditions	Values	Unit
V_{RRM}	$T_j = 25 \text{ }^\circ\text{C}$, $I_R = 0.4 \text{ mA}$	1600	V
$I_{F(AV)}$	$T_c = 80 \text{ }^\circ\text{C}$, $T_j = 150 \text{ }^\circ\text{C}$	305	A
I^2t	$T_j = 150 \text{ }^\circ\text{C}$, 10 ms, sin 180°	130050	A ² s
I_{FSM}	10 ms	$T_j = 25 \text{ }^\circ\text{C}$	6600
	sin 180°	$T_j = 150 \text{ }^\circ\text{C}$	5100
T_{jmax}		150	°C

Electrical Characteristics					
Symbol	Conditions	min.	typ.	max.	Unit
I_R	$T_j = 25 \text{ }^\circ\text{C}$, V_{RRM}			0.4	mA
	$T_j = 120 \text{ }^\circ\text{C}$, V_{RRM}			2.2	mA
V_F	$T_j = 25 \text{ }^\circ\text{C}$, $I_F = 320 \text{ A}$		1	1.21	V
	$T_j = 125 \text{ }^\circ\text{C}$, $I_F = 320 \text{ A}$		0.9	1.1	V
$V_{(TO)}$	$T_j = 125 \text{ }^\circ\text{C}$			0.83	V
r_T	$T_j = 125 \text{ }^\circ\text{C}$			0.5	mΩ
t_{rr}	$T_j = 25 \text{ }^\circ\text{C}$, ± 1 A		49		μs


Thermal Characteristics					
Symbol	Conditions	min.	typ.	max.	Unit
T_j		-40		150	°C
T_{stg}		-40		150	°C
T_{solder}	10 min.			250	°C
T_{solder}	5 min.			320	°C
$R_{th(j-c)}$	Semipack 2 assembly		0.185		K/W

Mechanical Characteristics			
Symbol	Conditions	Values	Unit
Raster size		16,3 x 18,2	mm
Area total		296,66	mm ²
Anode		bondable (Al)	
Cathode		solderable (Ag/Ni)	
Wire bond		Al, diameter ≤ 500 μm	
Package		tray	
Chips / Package		20	pcs

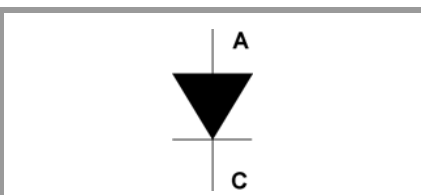

SKR

SKR 16,3 x 18,2 Qu bond

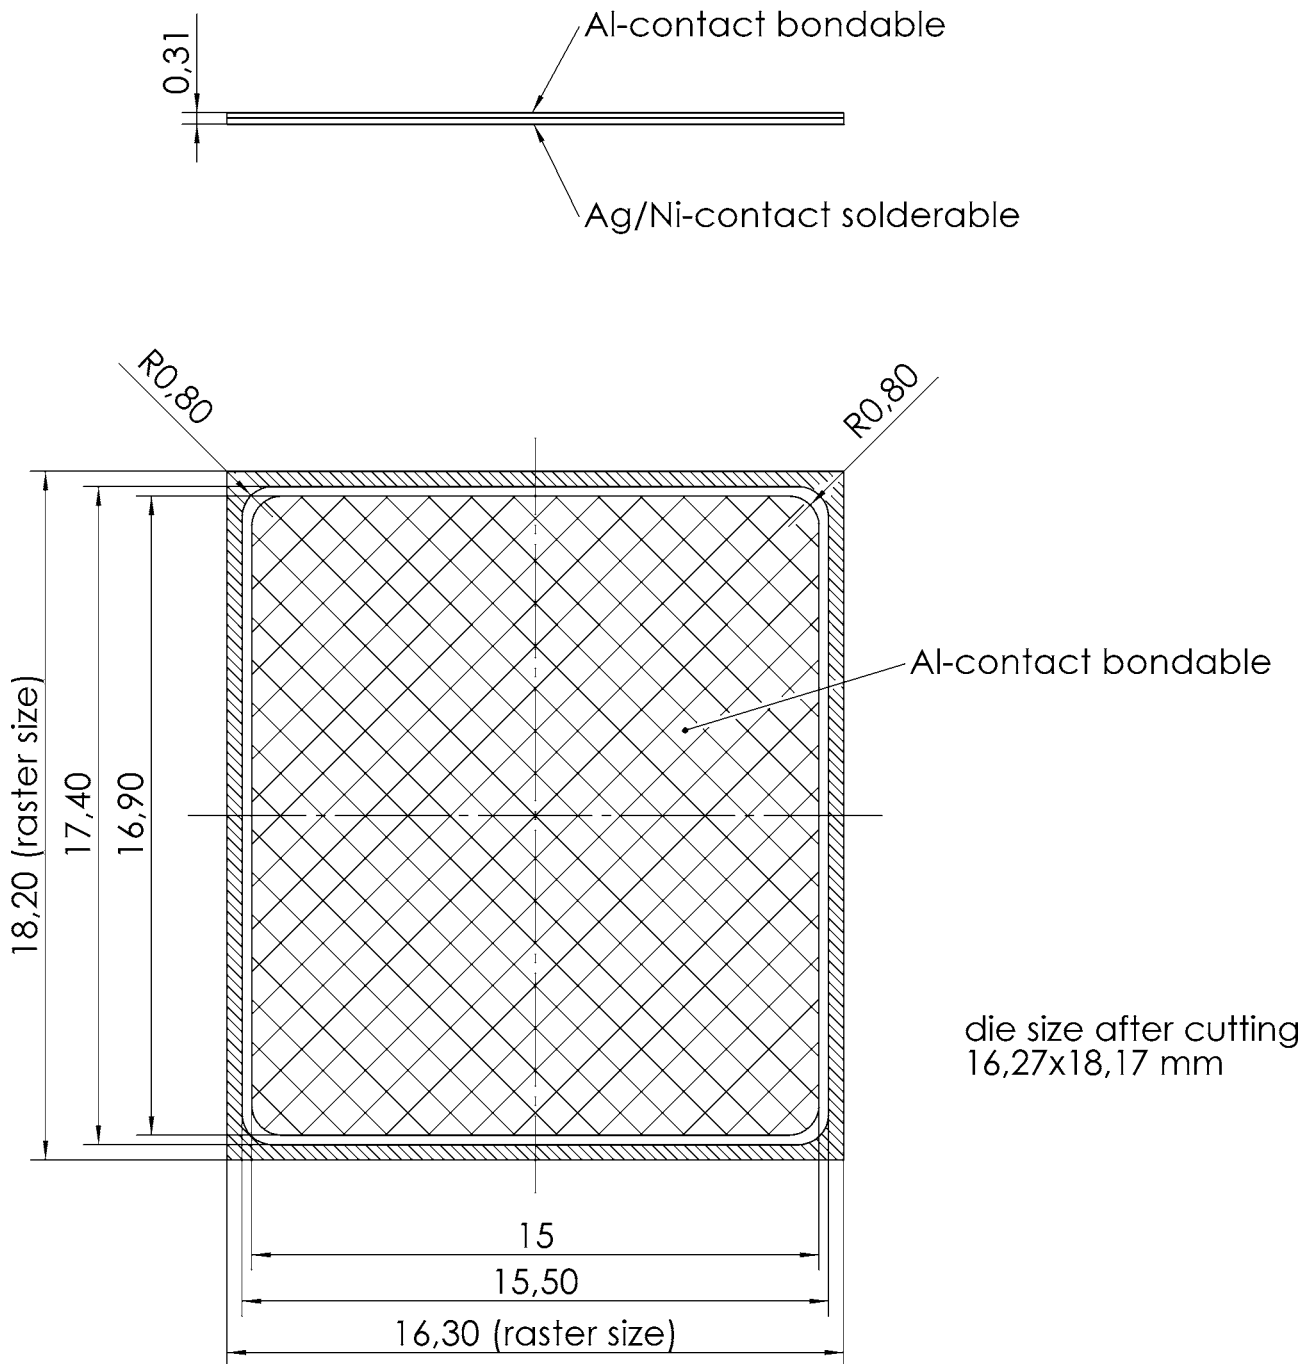

This technical information specifies semiconductor devices. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.