

### INTRODUCTION:

Adam Tech 0.8mm and 1.00mm Pin Header and Female Header series is a fine pitch, low profile, dual row, PCB mounted connector set intended for limited space applications or where total weight is a factor. Our specially tooled insulators and contacts maintain consistent high quality through our automated production processes. Each series is available in thru-hole PCB or SMT mounting and plated tin, gold or selective gold as specified.

### FEATURES:

0.8mm and 1.0mm versions  
Pin Header and Female Header set  
Lightweight and Compact  
Hi Temp Insulators

### MATING OPTIONS:

Mates with all industry standard 0.8mm & 1.0mm pitch headers and female headers

### SPECIFICATIONS:

#### Material:

Standard Hi-Temp insulator: Nylon 6T, rated UL94V-0  
Insulator Color: Black  
Contacts: Phosphor Bronze

#### Plating:

U = Gold flash (30u" optional) over nickel underplate  
SG = Gold flash (30u" optional) over nickel underplate on contact area, tin over copper underplate on tails.  
T = Tin over copper underplate overall.

#### Electrical:

Operating voltage: 250V AC max.  
Current rating: 1 Amp max  
Contact resistance: 20 mΩ max. initial  
Insulation resistance: 5000 MΩ min.  
Dielectric withstanding voltage: 1000V AC for 1 minute

#### Mechanical:

Mating durability: 500 cycles min.

#### Temperature Ratings:

Operating temperature: -40°C to +105°C  
Max process temp: 230°C for 30 ~ 60 seconds  
(260°C for 10 seconds)  
Soldering process temperature: 260°C

### PACKAGING:


Anti-ESD plastic bags or tubes

### APPROVALS AND CERTIFICATIONS:


UL Recognized File No. E224053  
CSA Certified File No. LR1578596




### 0.8mm MALE ORDERING INFORMATION

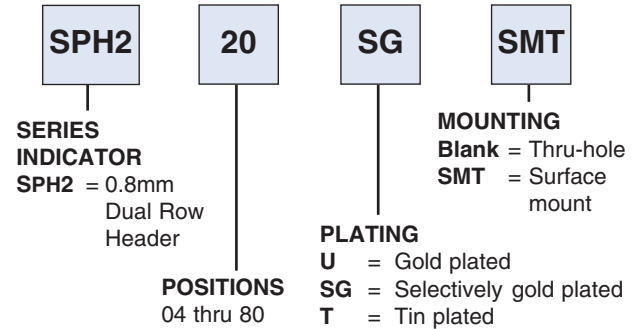

### 0.8mm FEMALE ORDERING INFORMATION

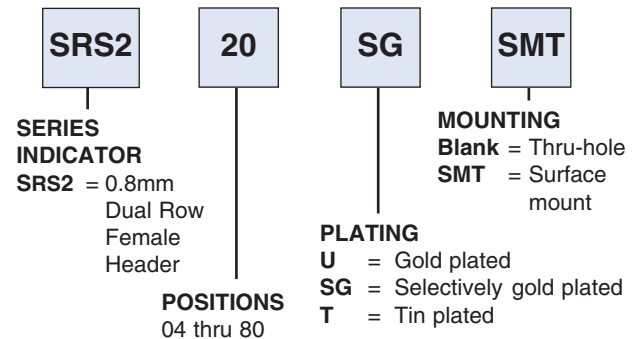

### 1.0mm MALE ORDERING INFORMATION

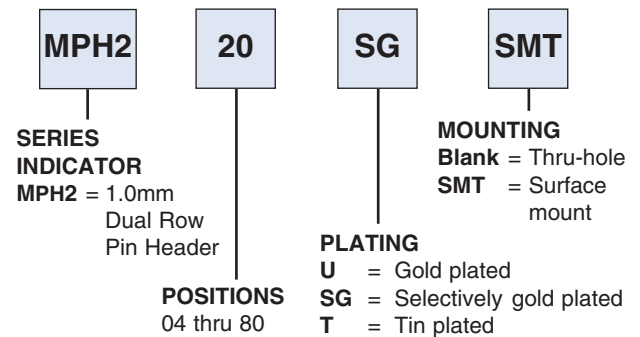

### 1.0mm FEMALE ORDERING INFORMATION

