



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: ttsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: SAW Filter 343.5MHz SMD 7.0x5.0mm

TST Parts No.:TB0621A


Customer Parts No.:_____


Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by:_____ Kazuma Lee 

Approval by:_____ Francis Chen  06/26/2008

Date:_____ 2008/06/26



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 343.5 MHz SMD 5.0mmX7.0mm

MODEL NO.: TB0621A

Rev No.1

A. MAXIMUM RATING:

1. Operating Temperature: -10°C to +70°C
2. Storage Temperature: -40°C to +85°C
3. Maximum Input Power : 10dBm

RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:

1. Ambient Temperature: 25 °

Item		Min.	Typical	Max.
Center frequency Fc	MHz	-	343.5	-
Insertion loss at Fc	dB	-	11.2	14.0
Bandwidth at -3.0dB	MHz	-	4.7	-
Amplitude Ripple (Fc ± 1.6 MHz)	dB	-	0.5	1.0
Group Delay Ripple (Fc ± 1.6 MHz)	nS	-	40	100
Triple transit suppression	nS	30	45	-
Attenuation (Reference level from minimum Insertion loss)				
243.5MHz ~ 334.5MHz	dB	40	54	-
334.5MHz ~338.5MHz	dB	35	50	-
348.5MHz ~352.5MHz	dB	35	45	-
352.5MHz ~443.5MHz	dB	40	50	-
Temp Coefficient	ppm/°C2	-	-0.036	-

C. FREQUENCY CHARACTERISTICS :

(1) S21 Response:(span 150MHz)

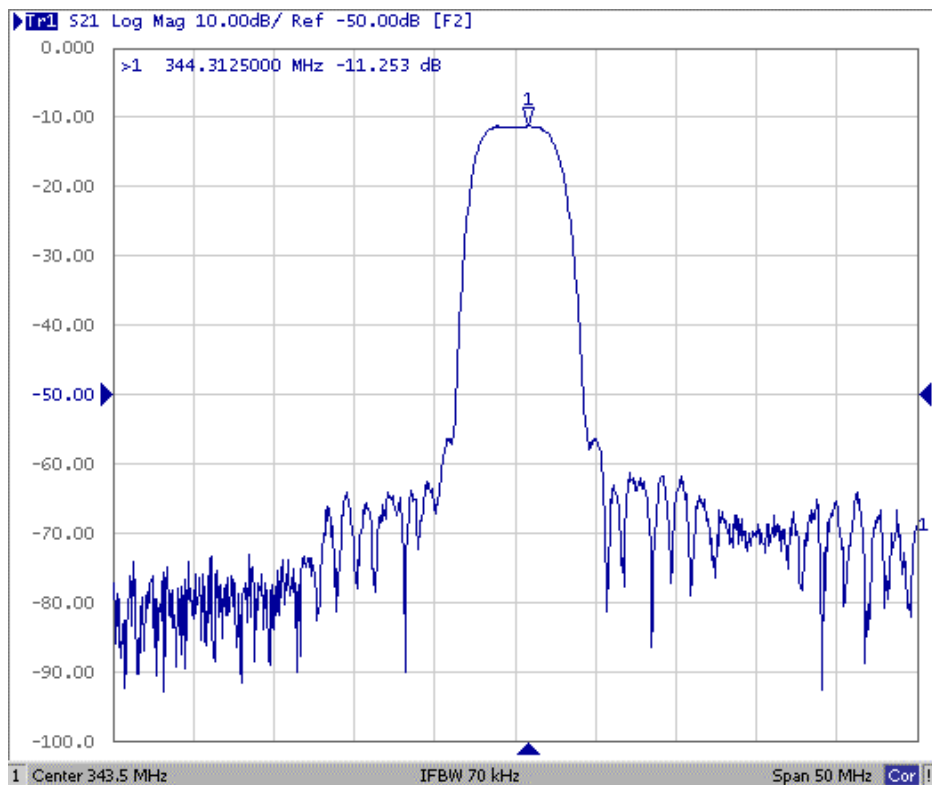


Fig1. Horizontal: 5MHz/Div Vertical: 10dB/Div

(2) S21 Response:(span 10MHz)


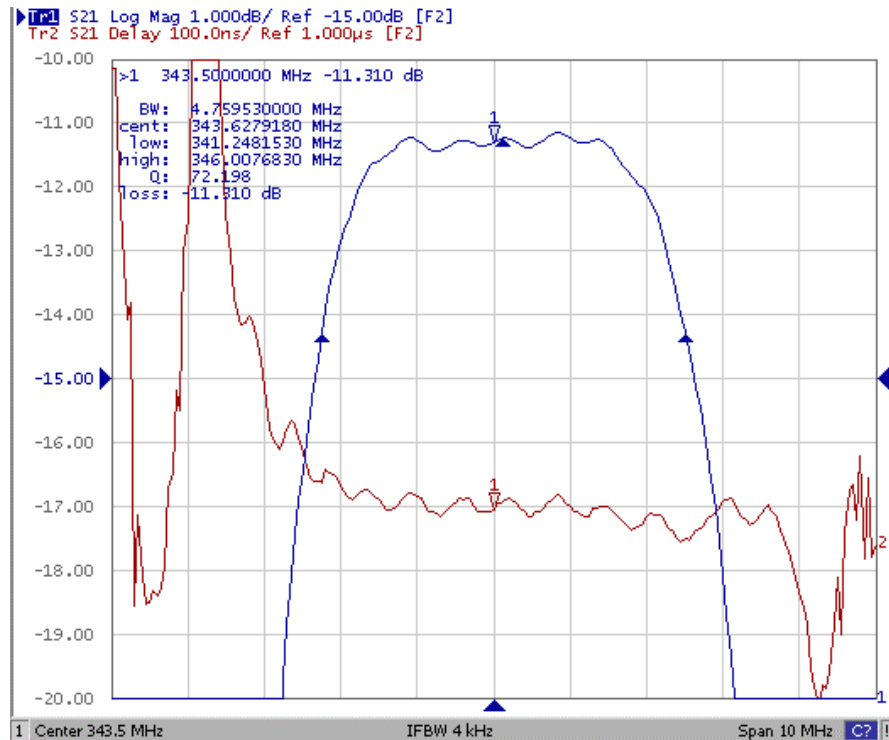


Fig2. Horizontal: 1MHz/Div Vertical: 1dB/Div

Vertical: 100ns/Div


D. MEASUREMENT CIRCUIT

1. Single ended input 50 ohm to Single ended Output 50 ohm

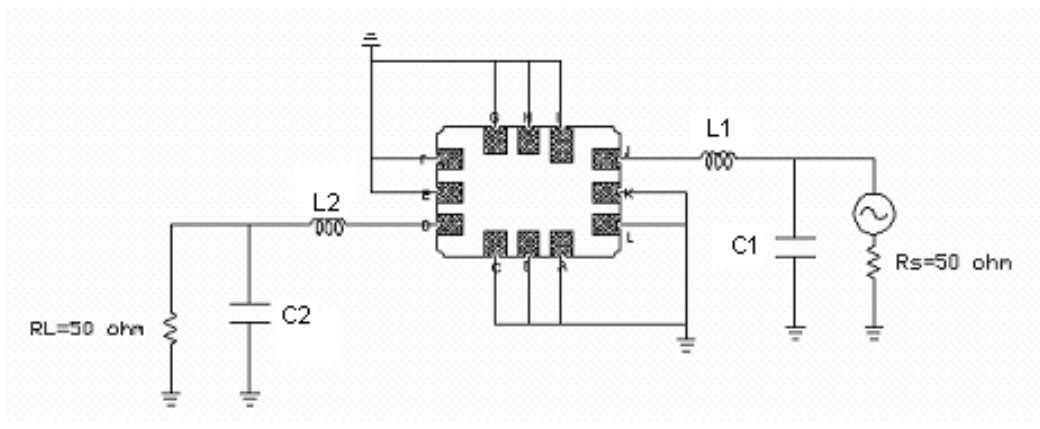

L1=56nH L2=47nH C1=20pF C2=18pF


E.OUTLINE DRAWING:

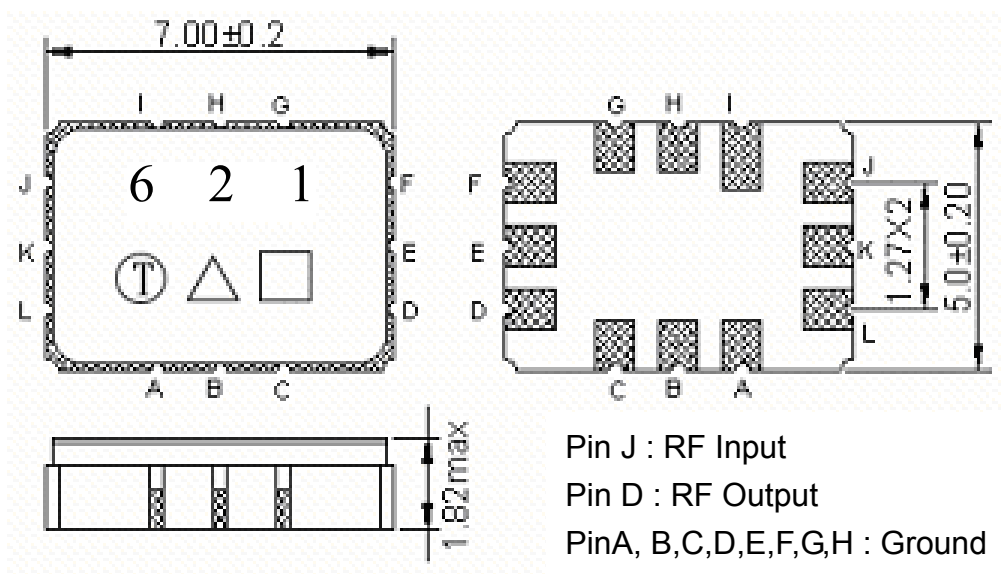

Pin J : RF Input
Pin D : RF Output
PinA, B,C,D,E,F,G,H : Ground
Unit: mm
□ : Week Code (Follow the table from planner each year)
△ : Product / Year Code


Year	2005 2009	2006 2010	2007 2011	2008 2012
Product Code	B	b	<u>B</u>	<u>b</u>

F. PCB Footprint

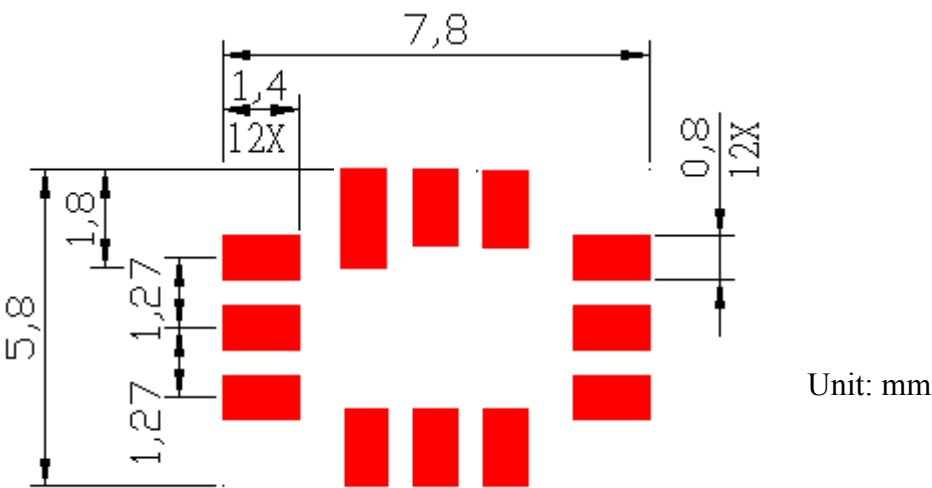


G. PACKING:

1. REEL DIMENSION

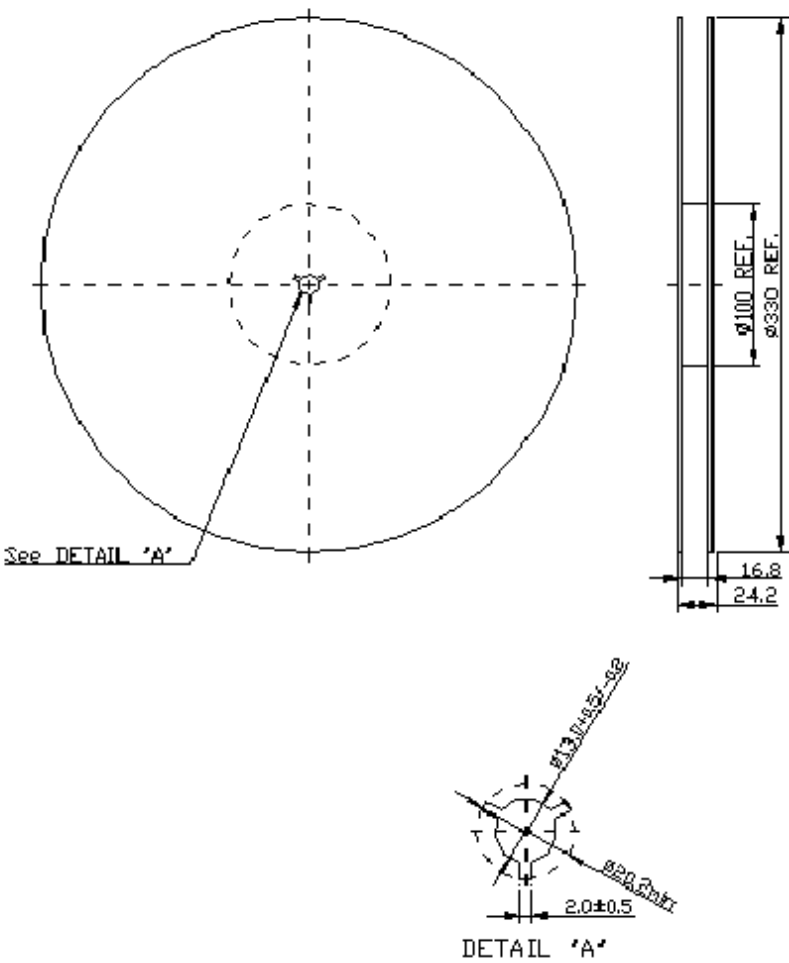

2. TAPE DIMENSION

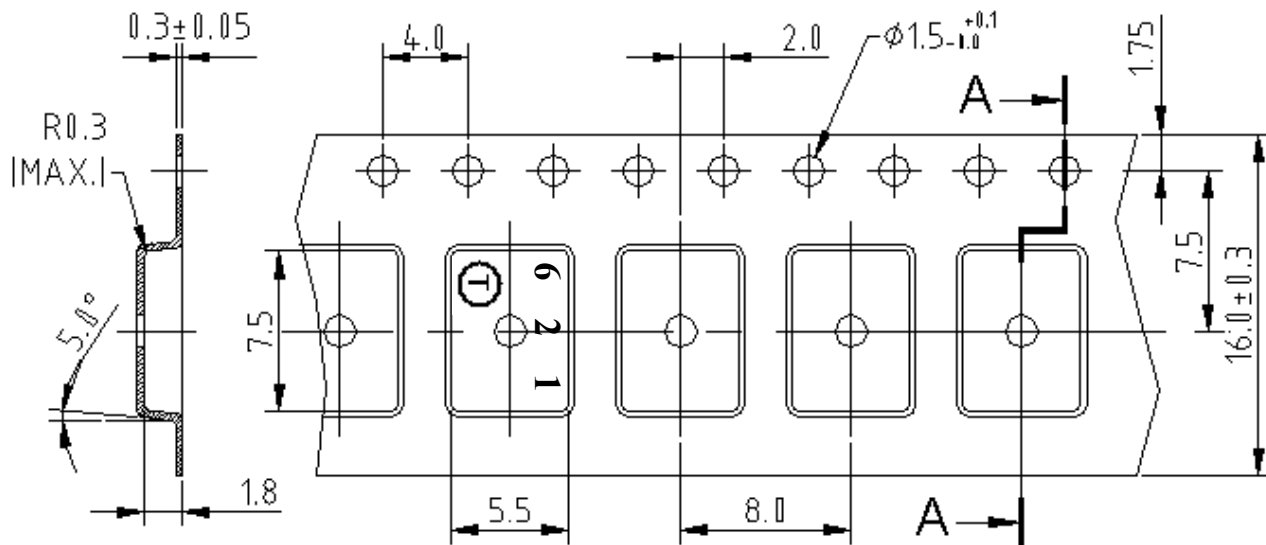

H. RECOMMENDED REFLOW PROFILE:

