



1. Mechanical:

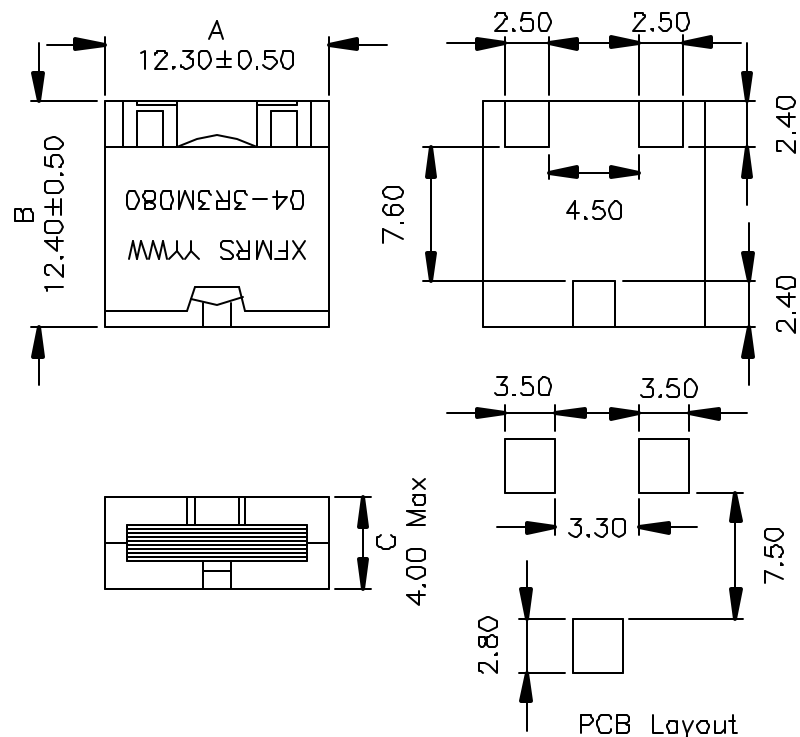

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Operating Temperature Range, -40°C to +85°C

2. Schematic:



3. ELECTRICAL SPECIFICATIONS: @25°C

OCL: $3.3\mu\text{H} \pm 20\%$ @100KHz 0.25V, 0Adc
 Isat: 8Adc (Based on 20% DCL Drop)
 Iheating: 8Adc (Based on 40°C Rise in Temp)
 DC Res.: 11.2mOhms Max

DOC. REV: A/1

XFMRS Inc	Title: SM INDUCTOR		
	UNLESS OTHERWISE SPECIFIED	P/N: XF121204-3R3M080	REV. A
TOLERANCES: .xx ± 0.25 Dimensions in mm	DWN.	李小锋	Dec-17-03
	CHK.	廖玉坤	Dec-17-03
SHEET 1 OF 1	APP.	MS	Dec-17-03