

IEC Appliance Inlet C14 with Fuseholder 1- or 2-pole, mates to Felcom

Plug removal necessary for fuse replacement



Appliance inlet with fuseholder



**Description**

- Component: Snap-in version from front side
- 2 Functions: Appliance Inlet Protection class I, Fuseholder for fuse-links 5 x 20 mm 1- or 2-pole
- For PCB mounting, fits to Felcom

**Approvals**

- CSA License Number: 38456

**Characteristics**

- Individual components soldered on a printed circuit board
- Plug removal necessary for fuse-link replacement
- Fuse drawer meets requirements of medical standard IEC/EN 60601-1
- The fuseholder is accessible from the equipment front
- Qualified for use in equipment according IEC/EN 60950

**References**

[General Product Information](#)

**Weblinks**


[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [Distributor-Stock-Check](#), [Accessories](#)

**Technical Data**

Ratings IEC	10A / 250VAC; 50Hz	Appliance Inlet	C14 acc. to IEC/EN 60320-1, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class 1
Ratings UL/CSA	10A / 250VAC; 60Hz	Fuseholder	1 or 2 pole, Shocksafe category PC2 acc. to IEC 60127-6, for fuse-links 5 x 20mm
Allowable Operation Temp.	-25 °C to 70 °C	Rated Power Acceptance @ Ta 23 °C	5 x 20: 2W (1 pole)/ 1.6W (2-pole) per pole
Degree of Protection	from front side IP 40 acc. to IEC 60529	Power Acceptance @ Ta > 23°C	Admissible power acceptance at higher ambient temperature see derating curves
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140		
Terminal	For PCB mounting		
Panel Thickness s	Snap-in: 1/1.2/1.5/2/2.5/3 mm		
Material: Housing	Thermoplastic, black, UL 94V-0		

**Dimensions**

Appliance inlet with fuseholder

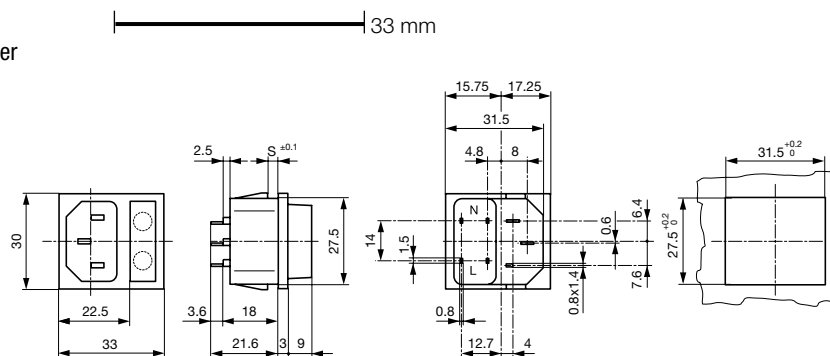

Appliance inlet with fuseholder

## Variants

Type	Panel Thickness s [mm]	Line Switch	Fuseholder	Connectors	Connector	Order Number
Fuseholder	1	-	1-pole	C14	-	6250.5510
Fuseholder	1	-	2-pole	C14	-	6255.5510
Fuseholder	1.2	-	1-pole	C14	-	6250.5512
Fuseholder	1.2	-	2-pole	C14	-	6255.5512
Fuseholder	1.5	-	1-pole	C14	-	6250.5515
Fuseholder	1.5	-	2-pole	C14	-	6255.5515
Fuseholder	2	-	1-pole	C14	-	6250.5520
Fuseholder	2	-	2-pole	C14	-	6255.5520
Fuseholder	2.5	-	1-pole	C14	-	6250.5525
Fuseholder	2.5	-	2-pole	C14	-	6255.5525
Fuseholder	3	-	1-pole	C14	-	6250.5530
Fuseholder	3	-	2-pole	C14	-	6255.5530

Packaging unit 50 Pcs

## Mating Outlets/Connectors

## Category / Description



## Appliance Inlet Overview complete

IEC Appliance inlet C16

0169

Appliance Inlet further types to 6250 / 6255

## Appliance Outlet Overview complete



IEC Appliance Outlet F, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal

4787

IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal

4788

IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal

5091

IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal

5092

Appliance Outlet further types to 6250 / 6255

## Connector Overview complete



IEC Connector C15, Rewireable, Straight

0101

IEC Connector C15A, Rewireable, Straight

0102

IEC Connector C15A, Rewireable, Straight

0102-G

IEC Connector C15A, Rewireable, Angled

0112

IEC Connector C13, Rewireable, Angled

4012

Connector further types to 6250 / 6255

...

## Power Cord Overview complete



Power Cord with IEC Connector C13, Angled

0311

Power Cord with IEC Connector C13, Angled

3011

Power Cord with IEC Connector C13, Angled

3012

Power Cord with IEC Connector C13, Angled

3013

Power Cord with IEC Connector C13

3020

Power Cord further types to 6250 / 6255

...

## Power Supply or Interconnection Cord Overview complete

Divers Power Supply and Interconnection Cords 10 A

Kabelverbindung/10 A

Power Supply or Interconnection Cord further types to 6250 / 6255