

**APPLIED
CONCEPTS INC.**

397 Route 281 - P.O. BOX 453
Tully, New York 13159-0453
Phone: (315) 696-6676 Fax: (315) 696-9923
www.acipower.com

AC5-12-1050

PRODUCT DATA SHEET

8/7/00

CCFL INVERTER
(For Multiple Tube Applications)

The AC5-12-1050 is designed to power 6 CCFL's to a nominal power level of 18.5 watts.

Intensity control (0-100%) is accomplished by the user providing a variable dc level of 0V(off) to 5V(full-on) at pin 5 of CON1.

Enable control is accomplished at pin 3 of CON1 (0V=off, 5V=on).

All outputs are open and short circuit protected.

This inverter meets the nominal drive requirements for the Landmark 15", C095A/HE (2 inverters required).

Single inverter solution (AL-1129) available. Please contact factory for information.

Specifications:

Vin = +12V +/- 10%

CCFL strike voltage = 1400Vrms @ Vin=12V

CCFL tube current = 5.6mA/tube @ 100% intensity/Vin=12V)

Recommended CCFL sustaining voltage = 450Vrms - 650Vrms

Nominal tube current frequency = 48khz +/- 10%

Nominal pwm frequency = 98Hz +/- 3%

Pwm duty cycle range = 0 to 100%

Average electrical efficiency >90%

External PWM signal input control via enable pin

Output PWM sync signal @ pin 6 of CON1


Additional control capability:*

Supports multiple units ie: Master/Slave(s)

Synchronization to display frame-rate

UL 1950 Recognized (File No. E201813)

* Please contact factory for information

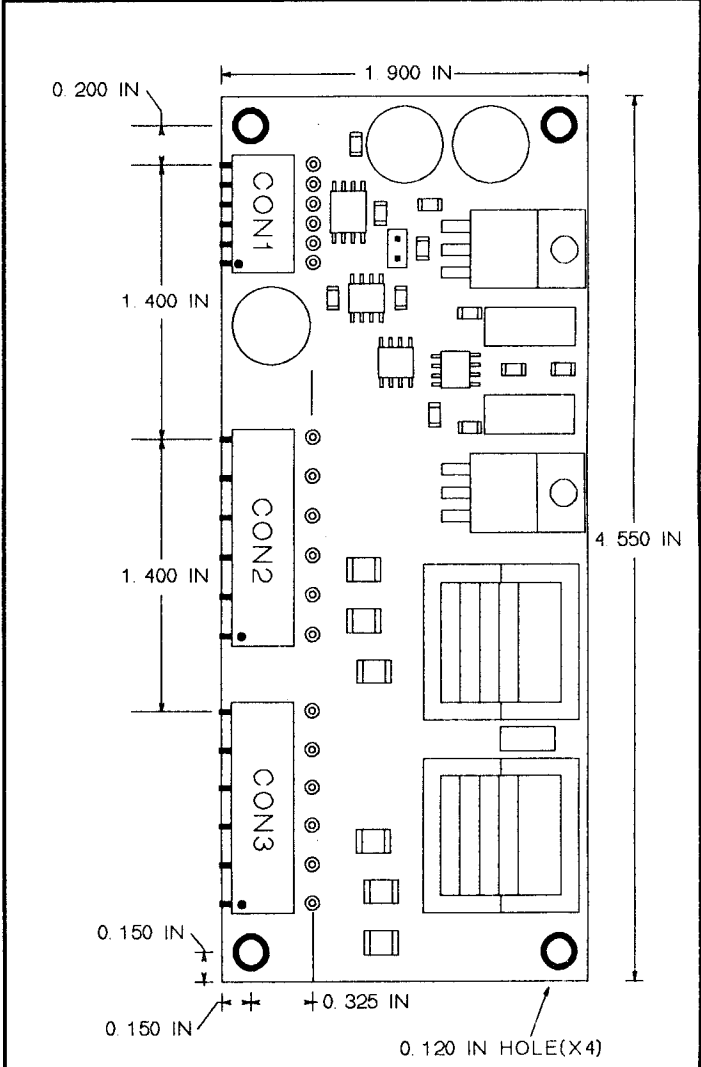

PROFILE = 0.575 IN

CON1 MOLEX 22-28-1063		CON2(CON3) MOLEX 22-28-1113	
PIN #		PIN #	
1	+12V	1	CCFL 3(6)
2	GND	2	NC
3	ENABLE	3	CCFL 2(5)
4	LOGIC HI	4	NC
5	VCNTL	5	CCFL 1(4)
6	PWM OUT	6	NC
		7	NC
		8	NC
		9	NC
		10	NC
		11	CCFL COMMON