


HOLE PATTERN:  
Space requirement 5x5 pitch.

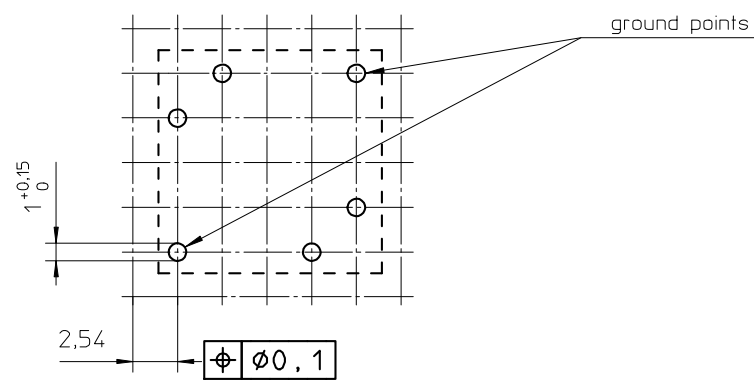

Coil former material: Sumikon PM-9630 (PF), glass-reinforced.  
UL file number: E41429 - UL94V-0.  
Pin material: CuSn - Ni flash, Sn plated.  
Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.  
Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.  
Min. winding area: 9,5 mm<sup>2</sup>.  
Mean length of turn: 25 mm.

CLASSNO.	CSV-RM5-1S-4P-IZ		4322 021 06871	07-11-08
07-11-08				
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1	SPSH BL BL
MPA	CHECK CONTR.	DAT.	07-11-08	Property of Eigendom van
				© FERROXCUBE 2007
			112 - 001	010
				A3