

EPA3463


- 2700 Vrms Isolation •
- Class 130 •

Electrical Parameters @ 25° C


Inductance ($\mu\text{H} \pm 10\%$)(1)	Leakage Inductance (μH Max.)	Interwinding Capacitance (pF Max.)	DCR (Ω Max.)		
L1-10	Pins 1-10 with all Sec. wdgs shorted	Between Pri. to Sec. wdgs	1-10	4-7	5-6
50	---	---	---	---	---

Notes: 1) Measured @ 100 KHz, 0.1 Vrms.
Hipot sec. to sec. wdgs @ 500 Vrms.

Schematic

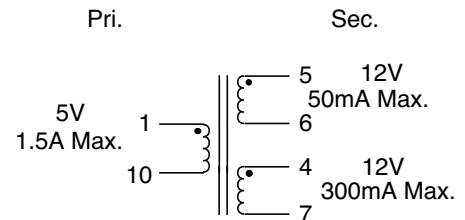

Package

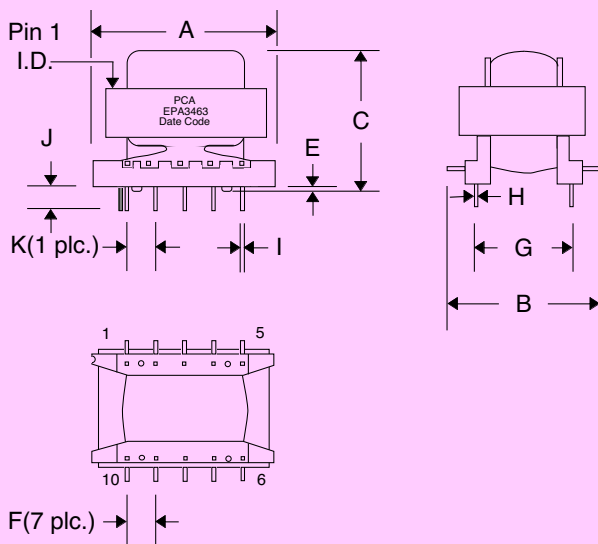

Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	-	1.07		-	27.18	
B	-	1.07		-	27.18	
C	-	.860		-	21.84	
E	.030	.050	.040	.760	1.27	1.02
F	.190	.210	.200	4.83	5.33	5.08
G	.590	.650	.620	14.99	16.51	15.75
H	.020	.030	.025	.508	.762	.635
I	.020	.030	.025	.508	.762	.635
J	.160	-		4.06	-	
K	.140	.160	.150	3.56	4.06	3.81