

### Approvals

NATO codification (not on all part numbers, please consult the factory for more detailed information)



### Life expectancy

L-10 LIFE AT 40°C:  
35 000 hours

### 400 Hz Motor

Housing material: zamak  
Impeller material: plastic UL 94 VO  
Weight: 500 g  
Bearing system: ball bearings

Connection: flying leads

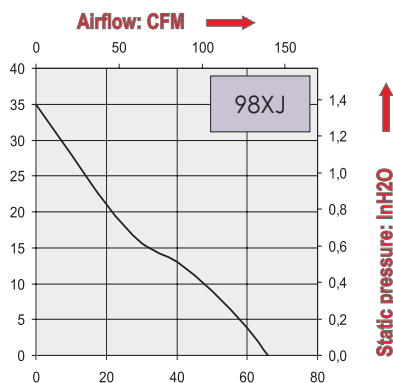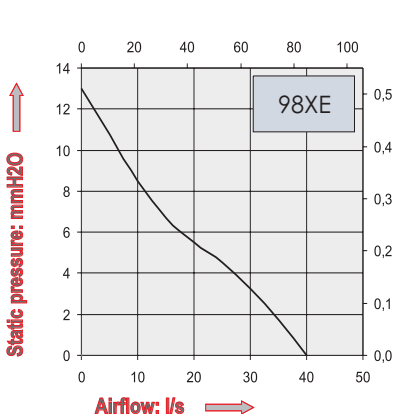

Part Number	Nominal voltage	Airflow	Noise level	Nominal speed	Phases	Capacitor	Input power	Nominal Current	Starting Current	Operating temperature	
	V	l/s	dB(A)	RPM		(not included)	W	mA	mA	Min.°C	Max.°C
98XE0162001	115	40	52	3500	1	0,15	13	113	135	-10	70
98XE0160001	200	40	52	3500	1	0,05	13	70	80	-10	70
98XJ0162001	115	66	65	5500	3		30	310	490	-10	70
	115	66	65	5500	1	1	30	310	610	-10	70
98XJ0160001	200	66	65	5500	3		30	180	280	-10	70
	200	66	65	5500	1	0,32	30	180	350	-10	70

**Additional versions:**  
Salt spray protected - Shock and vibration protected - Marine specifications  
Wide temperature range

**Accessories:**  
Refer to Accessories leaflet