



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date: April, 26, 2006

Product Name: SAW Filter 906 MHz SMD 3.0X3.0 mm

TST Parts No.: TA0562A

Customer Parts No.: _____

Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Bob Chau

Approval by: _____ Francis Chen

Date: _____ 4, 26, 2006



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 906MHz

MODEL NO.:TA0562A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -20°C to +70°C
4. Storage Temperature: -30°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:



Item	Unit	Min.	Type.	Max.	Note
Center Frequency F_c	MHz	-	906	-	-
Insertion Loss (888 ~ 924 MHz) IL	dB	-	2.5	3.2	-
Amplitude Ripple (888 ~ 924 MHz)	dB	-	1.3	1.7	-
Return Loss (888 ~ 924 MHz)	dB	6.5	8.2	-	-
Relative Attenuation (relative to 0 dB)					
D.C. ~ 810 MHz	dB	15	20	-	-
810 ~ 850 MHz	dB	20	23.5	-	-
942 ~ 960 MHz	dB	15	32	-	-
960 ~ 1030 MHz	dB	20	23.7	-	-
1030 ~ 2200 MHz	dB	20	23.5	-	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer

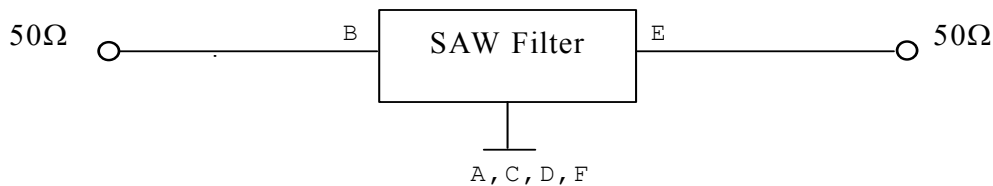

D.OUTLINE DRAWING:

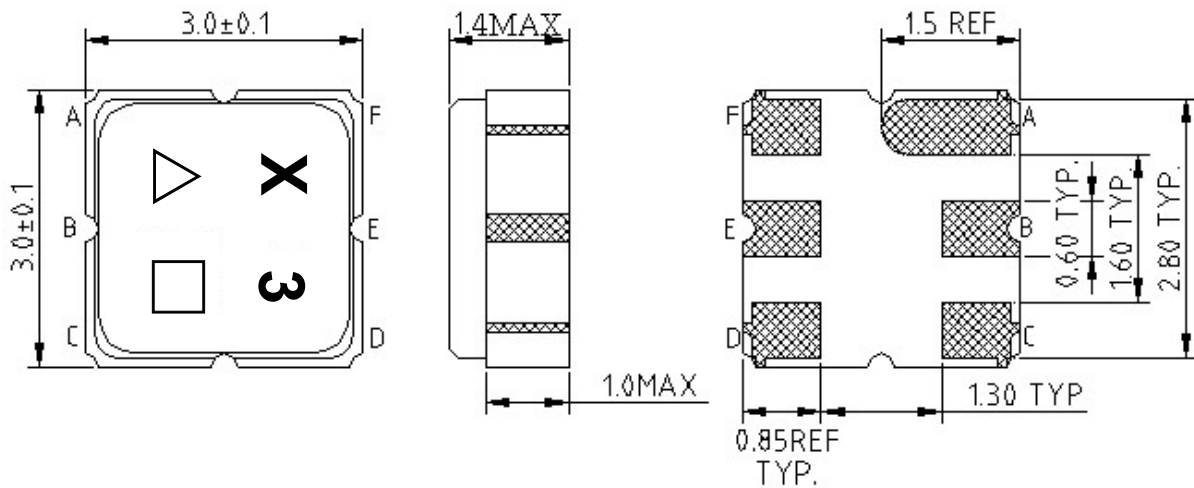


B INPUT
 E OUTPUT
 A,C,D,F GROUND
 DIMENSION : mm



△ : Year Code (2006->6, ..., 2009->9)

□ : Date Code (Follow the table from planner each year)

E. PCB Footprint:


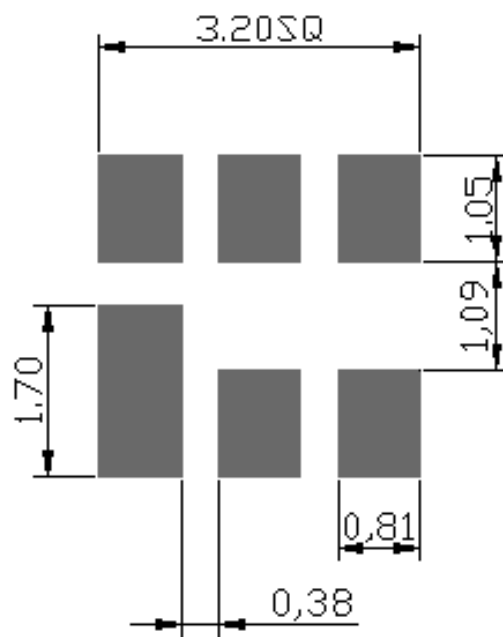


F. Frequency Characteristics :

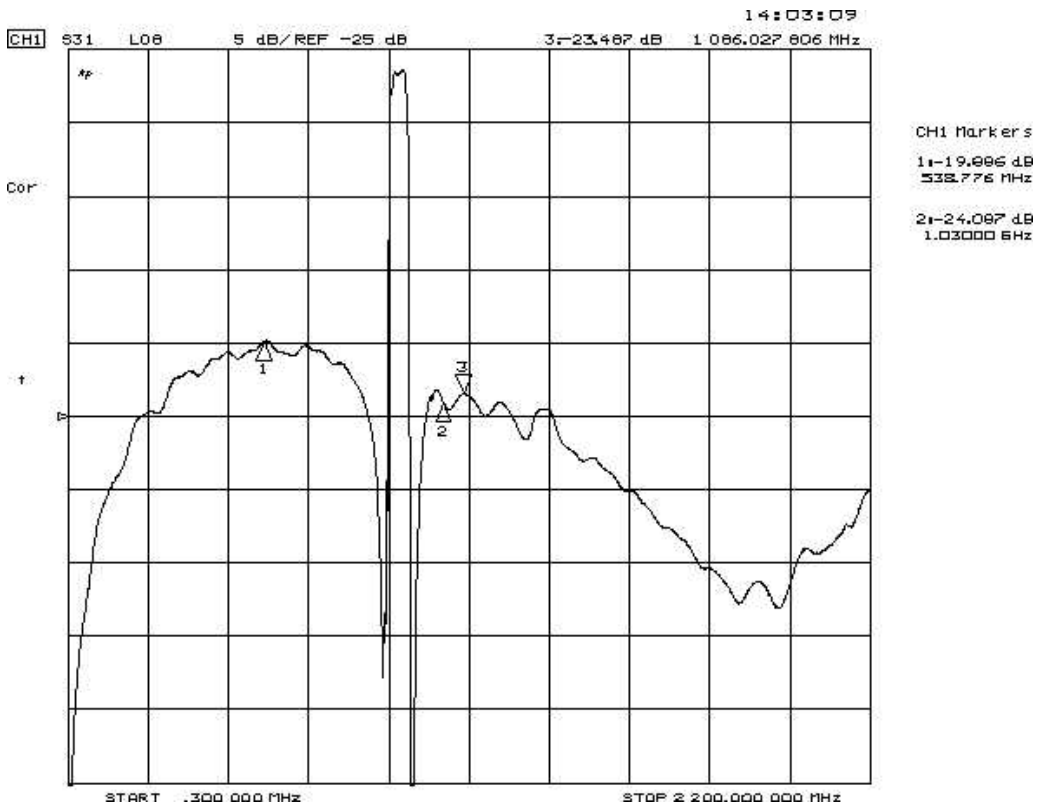
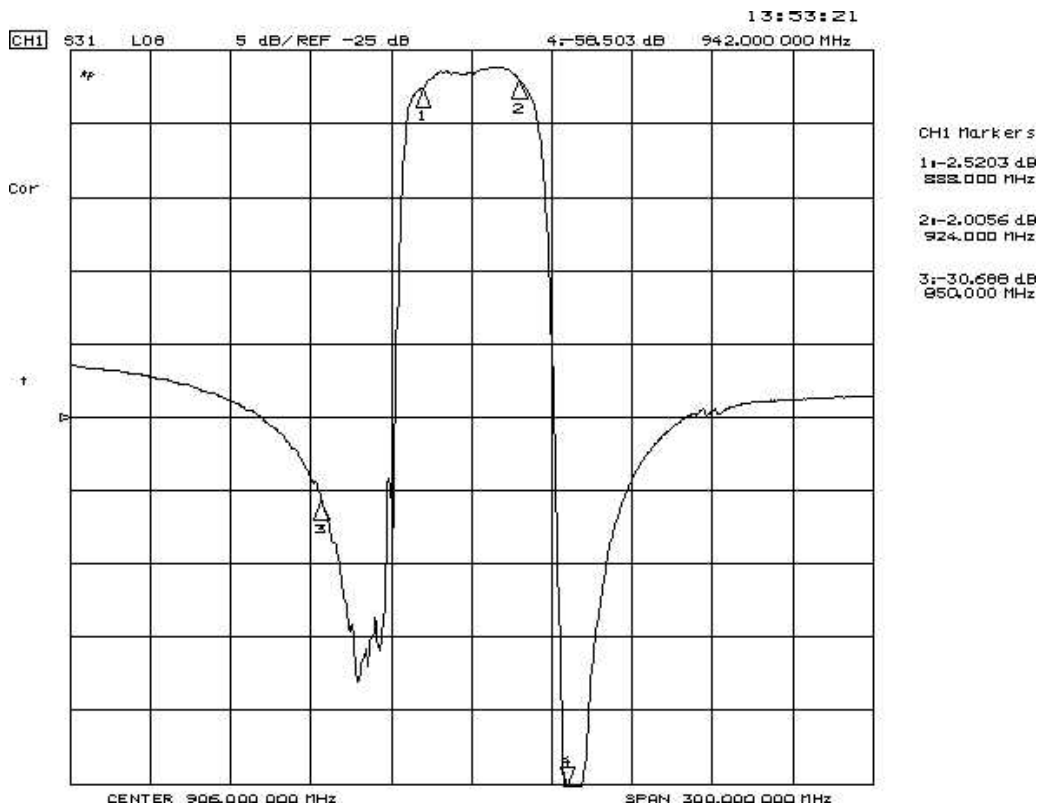


Reflections Functions :

S11 VSWR

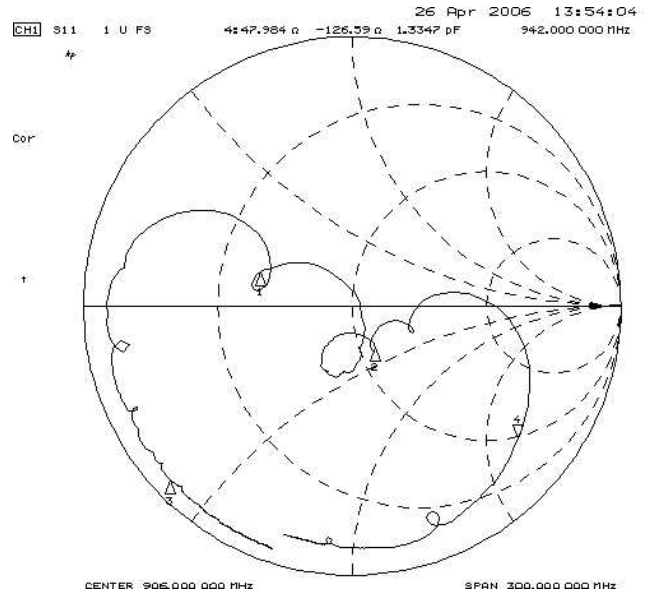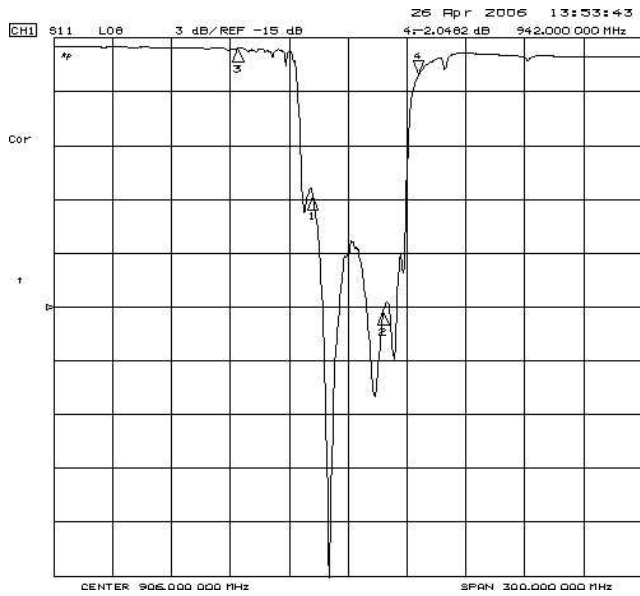


S22 VSWR

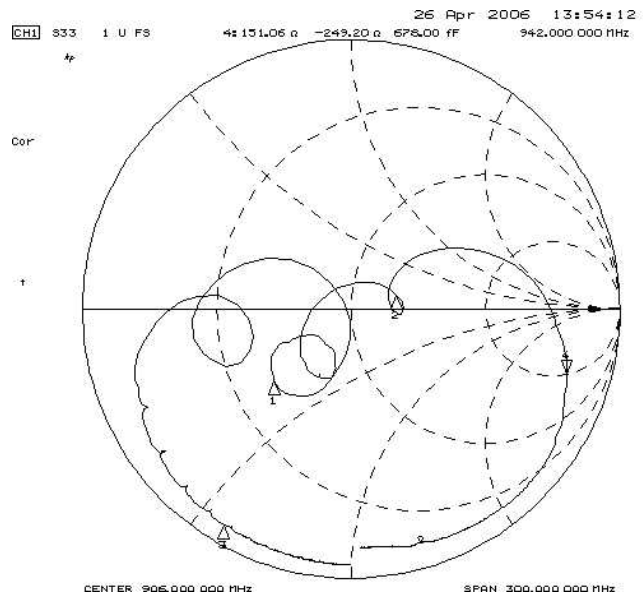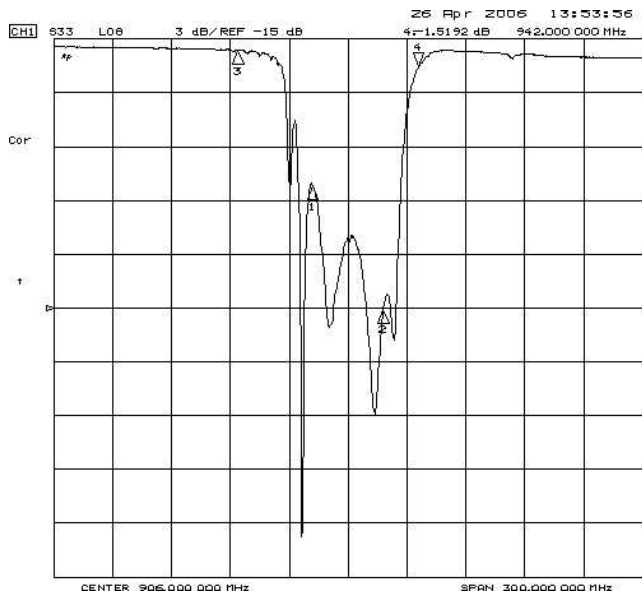


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7"=1000 ; 13"=3000)

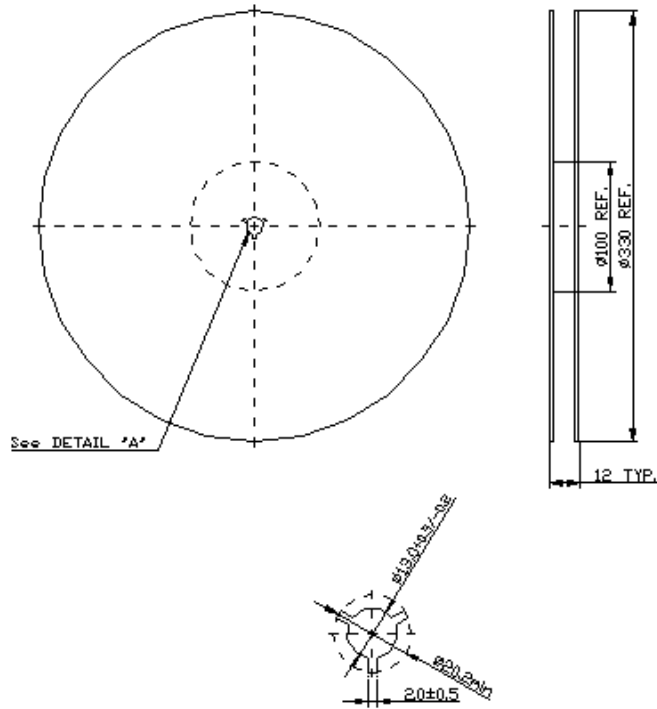

2.TAPE DIMENSION

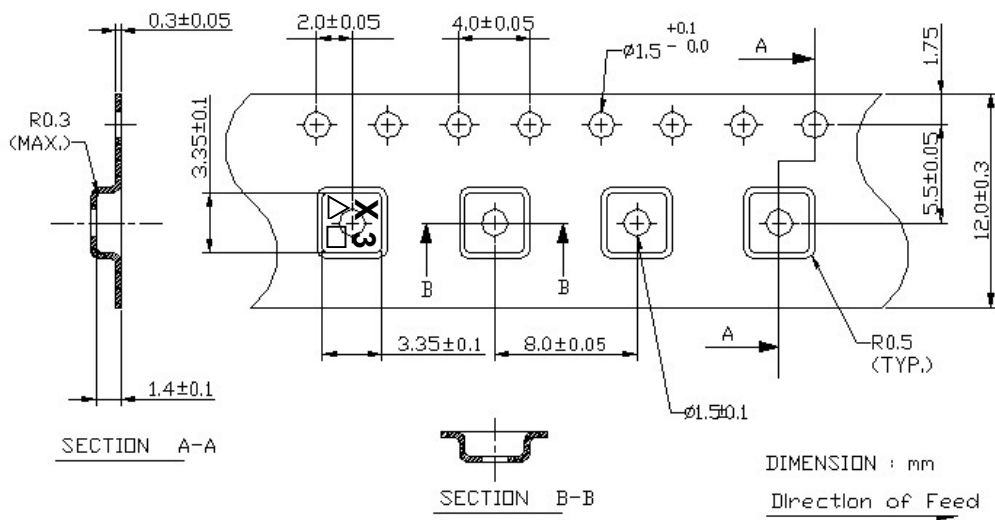

H. RECOMMENDED REFLOW PROFILE :

