

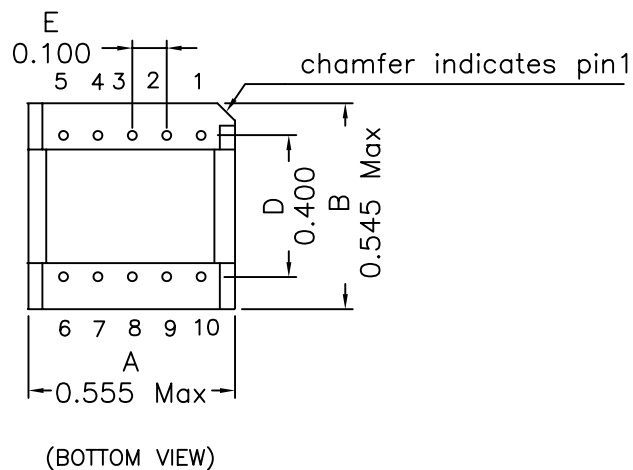
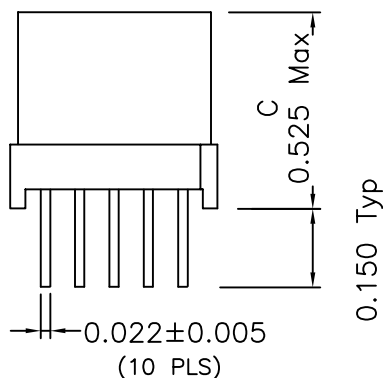


1. Mechanical Dimensions:



2. Schematic:

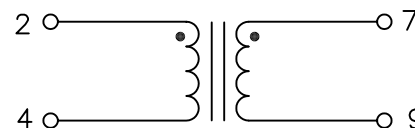

3. Electrical Specifications:

Turns Ratio: (2-4):(7-9) 1:1±1%

Isolation Voltage: 1000VAC

OCL: Pins 2-4 6.0mH±10% 10KHz 0.1V 0mAdc

OCL: Pins 2-4 6.0mH±15% 10KHz 0.1V 100mAdc

DC Res.: Pins 2-4 4.00 Ohms±10%

DC Res.: Pins 7-9 4.00 Ohms±10%

Note:

- Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0,
- ASTM oxygen index: > 28% ,
- Temperature rating: 155°C. UL file E151556,
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

XFMRS Inc	Title: ADSL Inductor	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF0063-AD6	REV. A
	DWN. 廖玉坤	Mar-07-01
	CHK. 李清儿	Mar-07-01
	APP. Joe Huff	Mar-07-01

DOC. REV: A/1