



1. Dimensions:

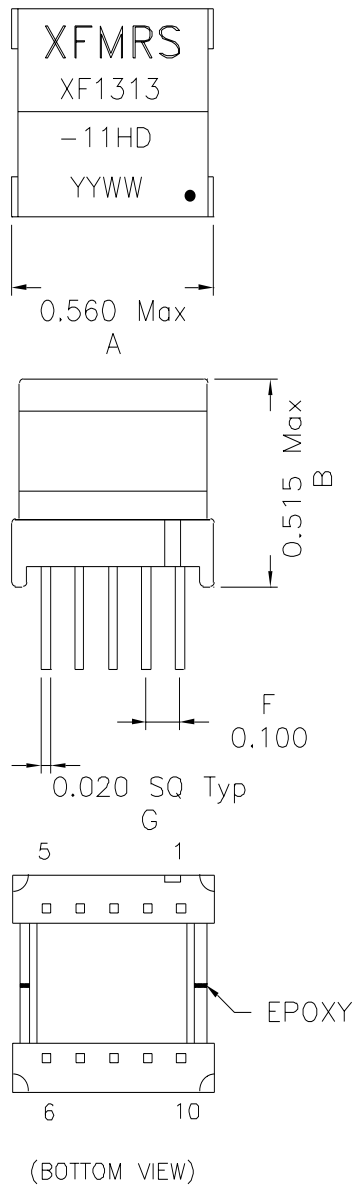

2.Schematic:



3.Electrical Specifications: @25°C

PIN1-5 OCL: 2.0mH ±10% @10KHz 0.1V 0/150mAdc
(CONNECT PIN2-4)

PIN9-7 LL: 300nH Max @100KHz 100mV
(CONNECT PIN 1,2,4&5)

TURNS RATIO: Line:Chip = 5CS:1±1%

DC Res.: Pins 1-4 0.57 Ohms ±15%

DC Res.: Pins 2-5 0.57 Ohms ±15%

DC Res.: Pins 9-7 0.25 Ohms ±15%

THD: -85dB Typ @100KHz, 5Vp-p 5.4 Ohm Load

ISOLATION VOLTAGE: 1500Vrms (Chip to Line)

DOC. REV A/1

XFMRS Inc	Title: HDSL TRANSFORMER	
UNLESS OTHERWISE SPECIFIED	P/N: XF1313-11HD	REV. A
TOLERANCES: .xxx ±0.010	DWN. 廖玉坤	Mar-30-00
Dimensions in INCH	CHK. 李清儿	Mar-30-00
SHEET 1 OF 1	APP. Joe Huff	Mar-30-00