


HOLE PATTERN:  
Space requirement 14x14 pitch

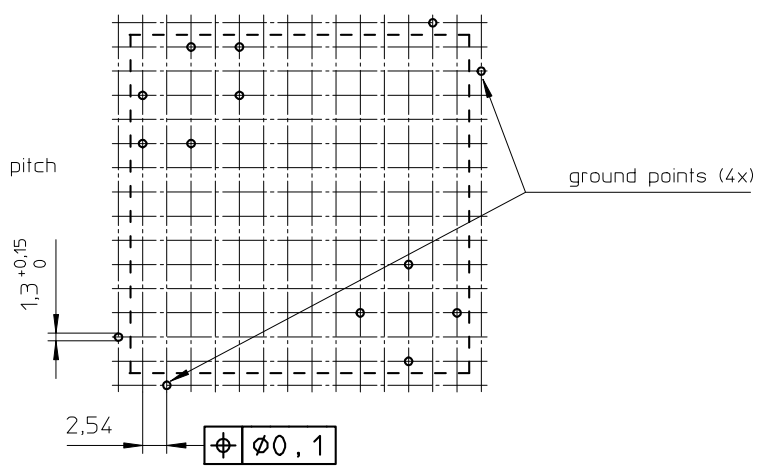

Coil former material: Sumikon PM-9630 (PF), glass-reinforced.  
UL file number: E41429 - UL94V-0.  
Pin material: CuSn - Ni flash, Sn plated.  
Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5s.  
Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.  
Min. winding area: 112 mm<sup>2</sup>.  
Mean length of turn: 71 mm.

CLASSNO.		07-11-08	
NAME		CSV-RM14-1S-12P-C	
NAAM		4322 021 07081	
M.P.A.		07-11-08	
CHECK CONTR.		07-11-08	
SUPERVISOR		1	
DATE		07-11-08	
PROPERTY OF		© FERROXCUBE 2008	
REV.		112 - 001	
REV.		010	
REV.		A3	