


Data Sheet

Type Number 6231
Designation IEC ---
System Li-Manganese dioxide / Organic Electrolyte

UL Recognition:..... pending
Nominal Voltage 6 V
Typical Capacity C 170 mAh
 Load 13 kOhm, at 20°C down to 4 V

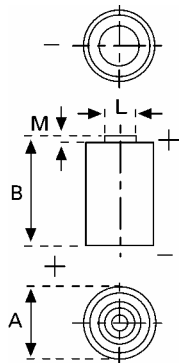

Weight (approx.) 8,8 g
Volume 3,1 ccm
Coding..... Date of Manufacturing Quater/Year

Temperature Ranges

Storage	min	max.
Discharge	-55°C	70°C
	-20°C	65°C

Dimensions

Diameter (A)	min	max.
Height (B)	12,8	13,0
Shoulder Diameter[L].....	24,4	25,1
Shoulder Height [M].....	5,5	
	1,1	

Segment
 Electronic

Main Applications
 Photo
 Electronic

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	4.0 V
Continuous 24h/d,7d/w Current [µA]:	13000 Ω	Time: Capacity [mAh]: Energy [mWh]:	395 h 170 945