


EPZ3031E




- Used in Power AC Line •
- UL 94V-0 Recognized Components •
- UL 1446 Class B Insulation System •
 - 2000 Vrms Isolation •
 - 500 mA Rated Current •


Electrical Parameters @ 25° C

Inductance (mH -10%, +100%) @ 1 KHz, 0.1 Vrms	DCR (Ω Max.)	Turns Ratio	SRF (KHz Typ.)
10	1.8	1:1	500
Pins 1-2, 4-3	Pins 1-2, 4-3	Pins 1-2:Pins 4-3	


Schematic



Impedance

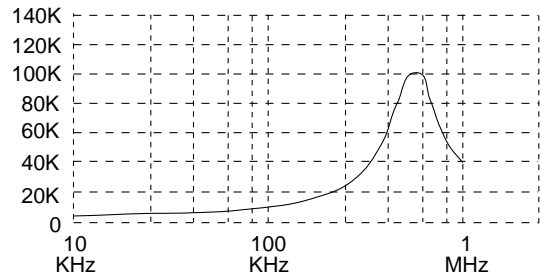

Package

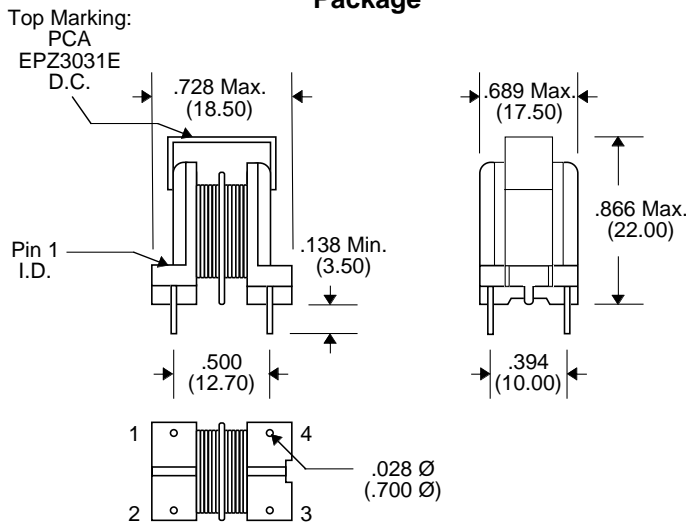

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25