

RF-9072-AT001**LOW-BAND VHF
DISCONE ANTENNA**

The Harris RF-9072 Low-band VHF Discone is intended for stationary use to provide vertical polarization with omnidirectional coverage. The antenna is composed of a supporting hub with internal matching circuit, six disc elements, six cone elements, and one vertical element. The vertical element enhances performance and separates this discone from most discones by providing an efficient radiation performance over the 30 to 110 MHz bandwidth with VSWR less than 3.0:1. This novel design has evolved through computer modeling and testing for optimal performance.

The RF-9072 antenna is designed to provide low-angle omnidirectional radiation coverage for line-of-sight communications. The flexibility of the antenna mounting clamp allows freedom to fit most masts.



Specifications for the RF-9072-AT001

■ Frequency Range

30 to 110 MHz

■ RF Power Capacity

100 Watts Continuous

■ Input Impedance

50 ohms nominal

■ VSWR

<3.0:1

■ Gain

2 dBi at 30 MHz to 0 dBi at 110MHz

■ Radiation Patterns

Omni-directional

■ Input Connect

N female

■ Dimension

Length: 3.3 m

Width: 2.2 m

■ Weight

7.3 kg

Features


■ Light-Weight Fiberglass Construction

■ Instantaneous 30-110 MHz Bandwidth


■ 100W Continuous

■ Vertical Polarization

■ Simple Mounting Scheme

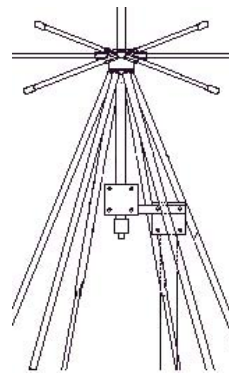

Radiation Patterns on 8m Mast

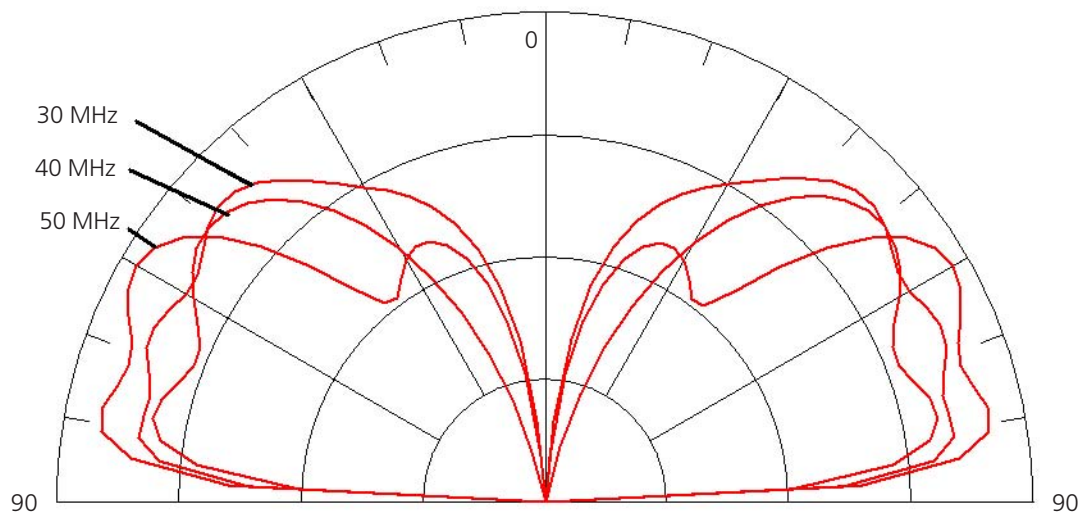

Specifications are subject to change without notice.



assuredcommunications™

RF Communications Division | 1680 University Avenue | Rochester, NY USA 14610
www.harris.com 1-585-244-5830

© Copyright 2005 Harris Corporation 8/05 DS-306A