


SAW Bandpass Filter 240103B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- Dip Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

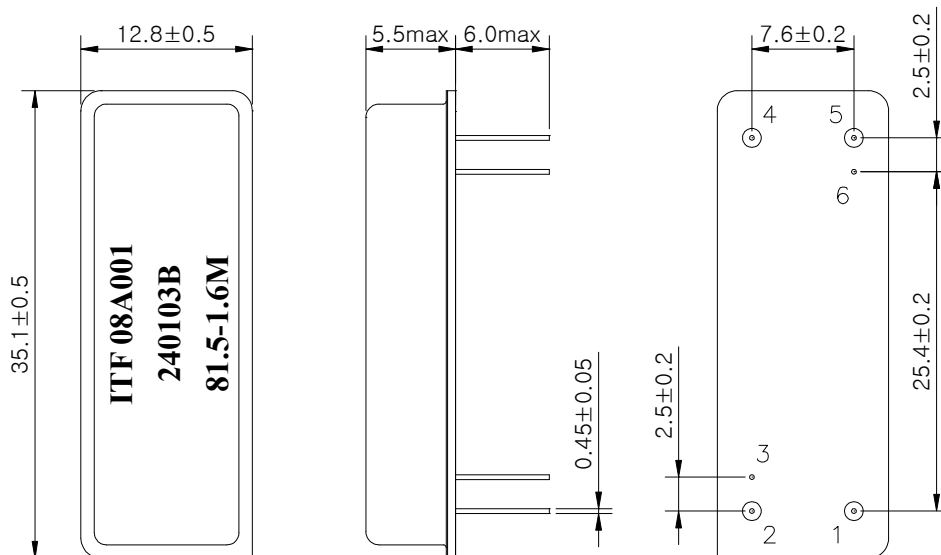

Package : D3512

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration

1	Input
4	Output
2, 5	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	240103B	
		Rev. Date	2008-04-23	
		Rev.	NW8004-CS01	1/5

SAW Bandpass Filter 240103B



3. Specifications

Fo = 81.5 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	81.5	-
Insertion Loss	dB	-	21.5	24.0
1dB Bandwidth	MHz	1.55	1.63	-
3dB Bandwidth	MHz	-	1.79	-
40dB Bandwidth	MHz	-	2.51	2.60
Amplitude Ripple (Fo +/- 0.65 MHz)	dB	-	0.4	1.0
Group Delay Variation (Fo +/- 0.65 MHz)	nsec	-	220.0	350.0
Absolute Delay	usec	-	3.2	-
Ultimate Rejection	dB	50	55	-
Out of Band Gain				
Fo +/- 0.8 MHz +/- 400KHz	dB	20	25	-
Fo +/- 0.8 MHz +/- 600KHz	dB	25	55	-
Fo +/- 0.8 MHz +/- 1.0MHz	dB	28	55	-
Fo +/- 0.8 MHz +/- 5MHz	dB	33	55	-
Temperature Coefficient of Frequency	ppm/°C ²	-	-0.03	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	240103B	
		Rev. Date	2008-04-23	
		Rev.	NW8004-CS01	2/5

SAW Bandpass Filter 240103B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

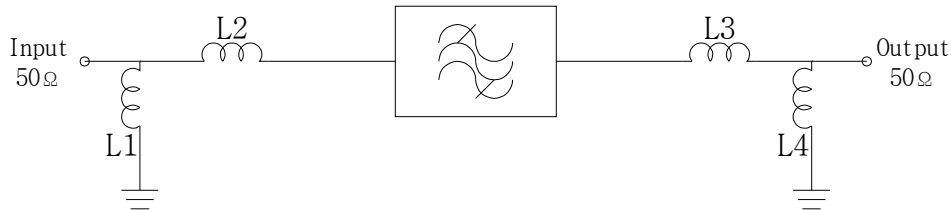

$$L1 = 82 \text{ nH}, L2 = 68 \text{ nH}$$

$$L3 = 100 \text{ nH}, L4 = 56 \text{ nH}$$

5. Marking Configuration

ITF¹⁾08A001²⁾

240103B³⁾

81.5⁴⁾-1.6M⁵⁾

1) Manufacturer name

2) Lot Number

3) Part Number

4) Center Frequency



5) 1dB-Bandwidth

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	240103B	
		Rev. Date	2008-04-23	
		Rev.	NW8004-CS01	3/5

SAW Bandpass Filter 240103B







6. Typical Performance (at +25°C)

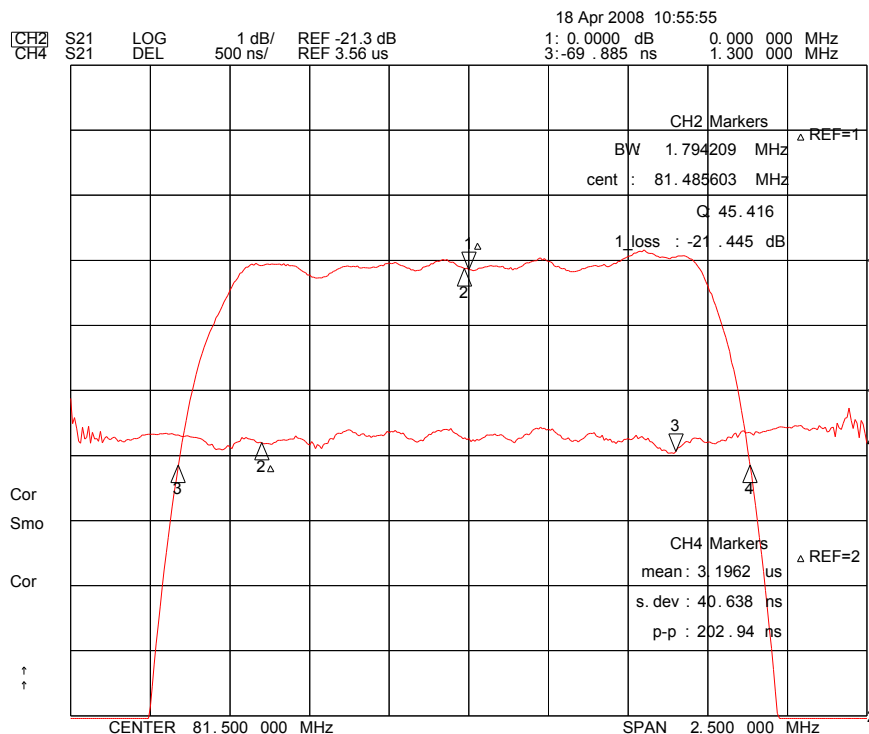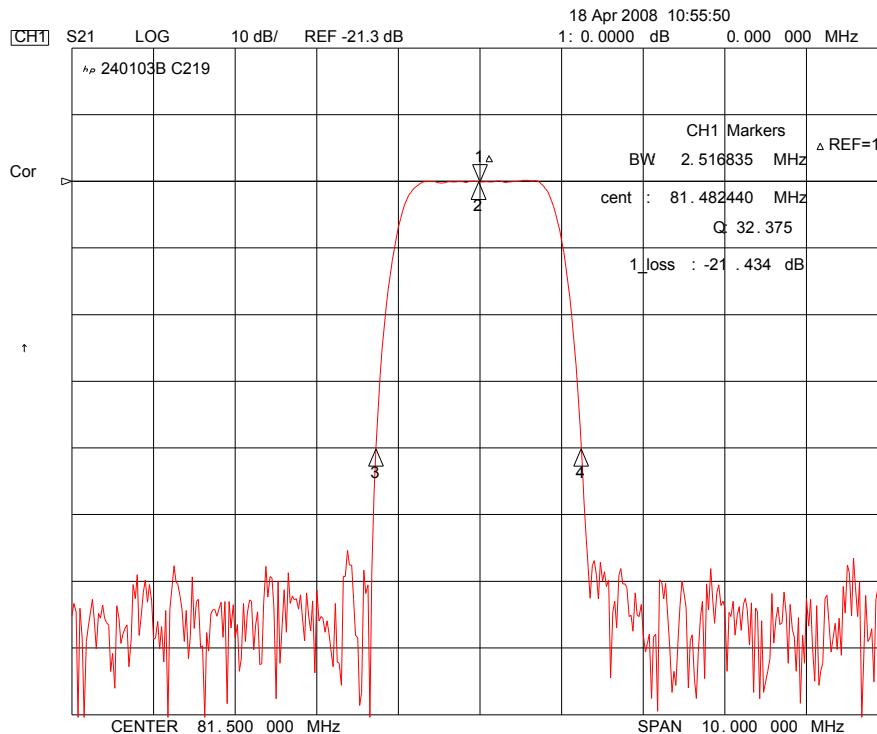

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No. 240103B	
			Rev. Date 2008-04-23	
			Rev. NW8004-CS01	4/5

SAW Bandpass Filter 240103B

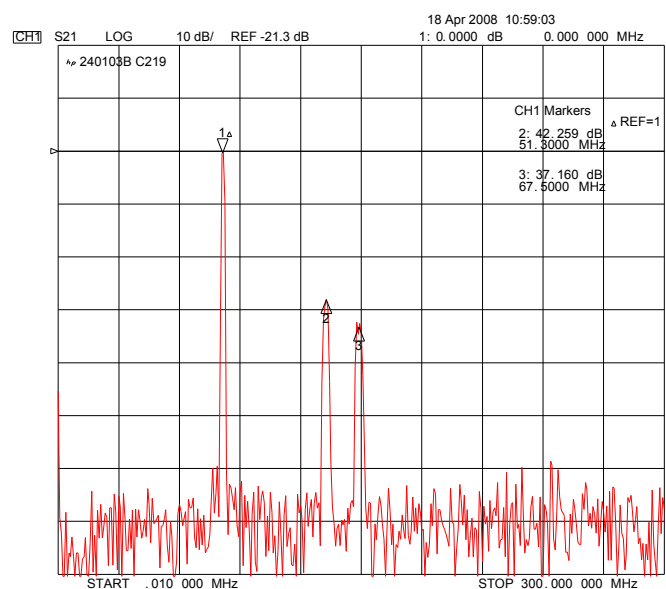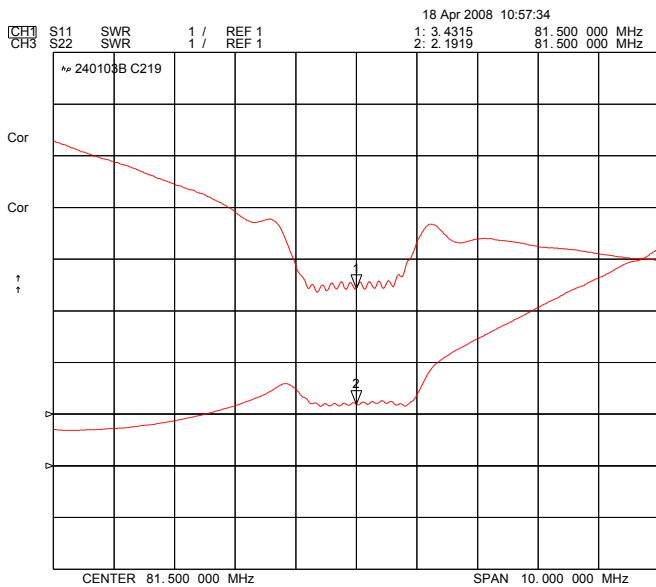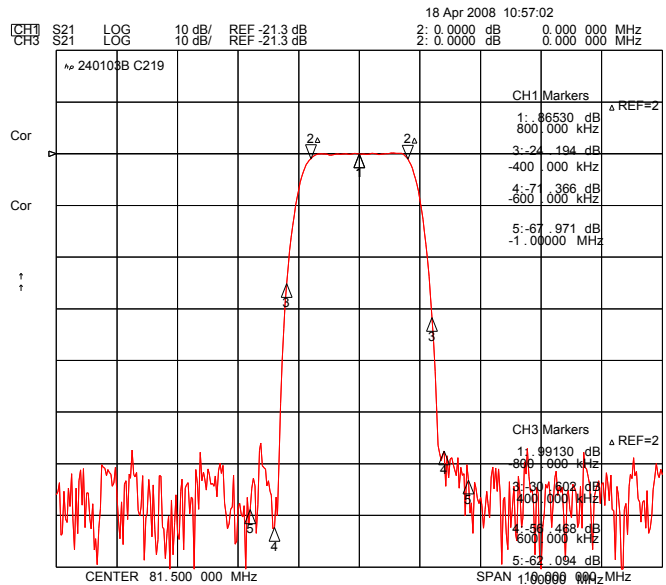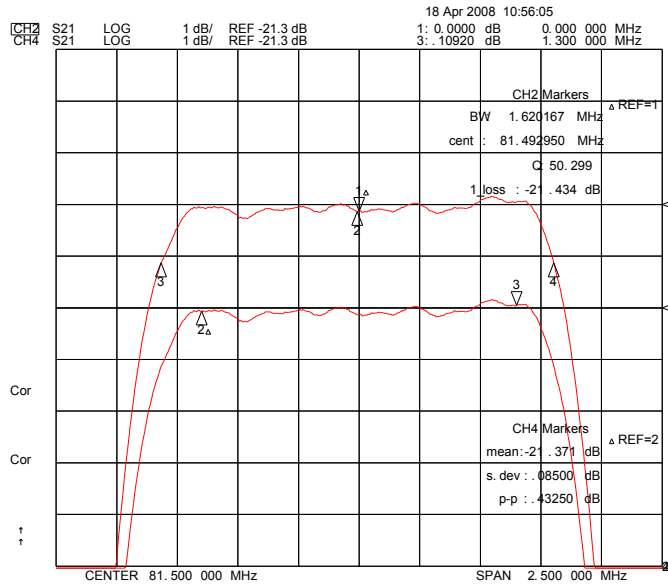

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

240103B

Rev. Date

2008-04-23

Rev.

NW8004-CS01

5/5