



1. Mechanical Dimensions:

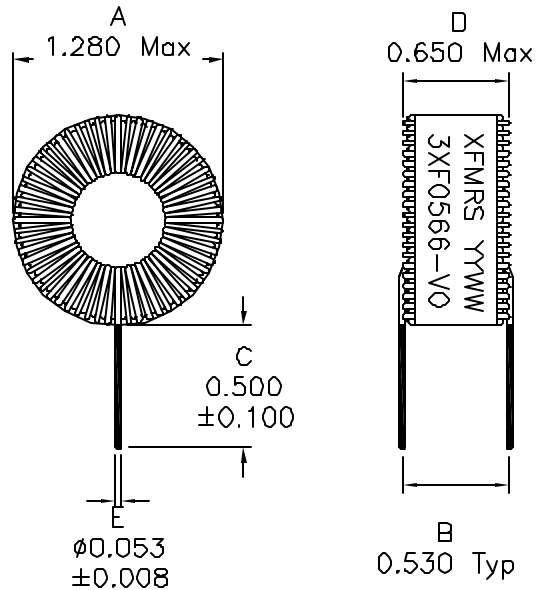

2. Schematic:



3. Electrical Specifications:

Inductance: 56uH $\pm 15\%$ @1.0KHz, 1.0V

Inductance: 33.7uH $\pm 15\%$ @ 10.2Adc

DC Resistance: 0.017 Ohms Max.

Q: 40 Min @10KHz, 1.0V

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: $> 28\%$
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to $+85^{\circ}\text{C}$
6. Storage Temperature Range: -55°C to $+125^{\circ}\text{C}$
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV. A/4

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com		Title: Toroid Inductor	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ± 0.010 Dimensions in Inch SHEET 1 OF 1	P/N: 3XF0566-VO		REV. A
	DWN.	李小锋	Feb-13-06
	CHK.	廖玉坤	Feb-13-06
	APP.	MS	Feb-13-06