
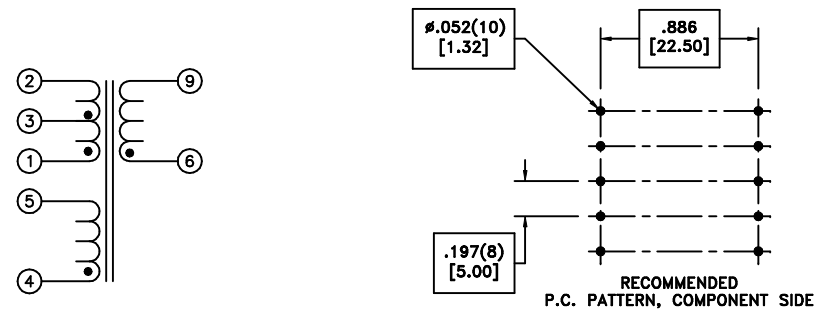


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

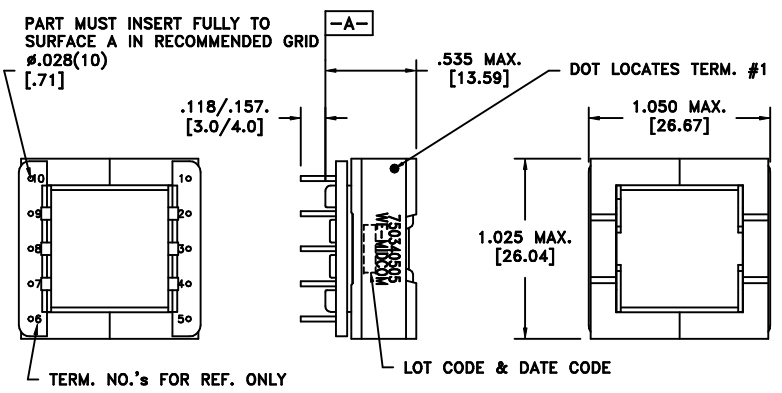

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.98 ohms max.
D.C. RESISTANCE	4-5 @20°C	1.20 ohms max.
D.C. RESISTANCE	6-9 @20°C	0.24 ohms max.
D.C. RESISTANCE		
INDUCTANCE	1-2 10kHz, 200mVAC, Ls	1.08mH ±7%
INDUCTANCE	1-2 10kHz, 200mVAC, 1.6ADC, Ls	0.20mH max. shift from initial inductance
DIELECTRIC	1-9 4000VAC, 1 second tie(3+4)	
DIELECTRIC	1-5 1800VAC, 1 second	
TURNS RATIO	(1-2):(4-5)	1:0.494, ±2%
TURNS RATIO	(1-2):(6-9)	1:0.247, ±2%

advise Isat adjust to 1.6Adc, Induction cannot meet spec. per 2.3Adc

REV.	DATE
01	05/09

Packaging Specifications
 Method: Tray
 PKG-0029
 www.midcom-inc.com

Unless otherwise specified:
 Tolerances: Fractions: ±1/64
 Angles: ±1° Decimals: ±.005[.127]
 This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER
 eiSos p/n: 750340505

Midcom WE
 www.midcom-inc.com

DRAWING NO.
750340505
 REVISIONS: SEE SHEET 1
 SCALE ---
 SHEET 2 OF 5