


# US 1A ... US 1S



## Surface mount diode

### Ultrafast silicon rectifier diodes

#### US 1A ... US 1S

**Forward Current: 1 A**

**Reverse Voltage: 50 to 1200 V**

#### Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0

#### Mechanical Data

- Plastic case SMA / DO-214AC
- Weight approx.: 0,07 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 7500 pieces per reel

1) Max. temperature of the terminals  $T_T = 100^\circ\text{C}$

2)  $I_F = 1 \text{ A}$ ,  $T_j = 25^\circ\text{C}$

3)  $T = 25^\circ\text{C}$

4) Mounted on P.C. board with 25 mm<sup>2</sup> copper pads at each terminal


5) US1A ... US1G

6) US1J ... US1S

Type	Polarity color band	Repetitive peak reverse voltage	Surge peak reverse voltage	Maximum forward voltage $T_j = 25^\circ\text{C}$ $I_F = 1 \text{ A}$	Maximum reverse recovery time $I_F = 0,5 \text{ A}$ $I_R = 1 \text{ A}$ $I_{RR} = 0,25 \text{ A}$ $t_{rr}$ ns
		$V_{RRM}$ V	$V_{RSM}$ V	$V_F$ <sup>2)</sup> V	
US 1A	-	50	50	1	50
US 1B	-	100	100	1	50
US 1D	-	200	200	1	50
US 1G	-	400	400	1,25	50
US 1J	-	600	600	1,7	75
US 1K	-	800	800	1,7	75
US 1M	-	1000	1000	1,7	75
US 1S	-	1200	1200	1,7	75

Absolute Maximum Ratings		$T_A = 25^\circ\text{C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
$I_{FAV}$	Max. averaged fwd. current, R-load, $T_T = 100^\circ\text{C}$	1	A
$I_{FRM}$	Repetitive peak forward current $f > 15 \text{ Hz}^1)$	6	A
$I_{FSM}$	Peak fwd. surge current 50 Hz half sinus-wave <sup>3)</sup>	30	A
$I^2t$	Rating for fusing, $t < 10 \text{ ms}^3)$	4,5	A <sup>2</sup> s
$R_{thA}$	Max. thermal resistance junction to ambient <sup>4)</sup>	70	K/W
$R_{thT}$	Max. thermal resistance junction to terminals	30	K/W
$T_j$	Operating junction temperature	- 50 ... + 150	°C
$T_s$	Storage temperature	- 50 ... + 150	°C

Characteristics		$T_A = 25^\circ\text{C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
$I_R$	Maximum leakage current, $T_j = 25^\circ\text{C}$ ; $V_R = V_{RRM}$ $T_j = 100^\circ\text{C}$ ; $V_R = V_{RRM}$	<10 <100	µA µA
$C_J$	Typical junction capacitance (at 1 MHz and applied reverse voltage of 4 V)	25 <sup>5)</sup> / 12 <sup>6)</sup>	pF
$Q_{rr}$	Reverse recovery charge ( $U_R = V$ ; $I_F = A$ ; $dI_F/dt = A/\text{ms}$ )	-	µC
$E_{RSM}$	Non repetitive peak reverse avalanche energy ( $L = \text{mH}$ ; $T_j = ^\circ\text{C}$ ; inductive load switched off)	-	mJ

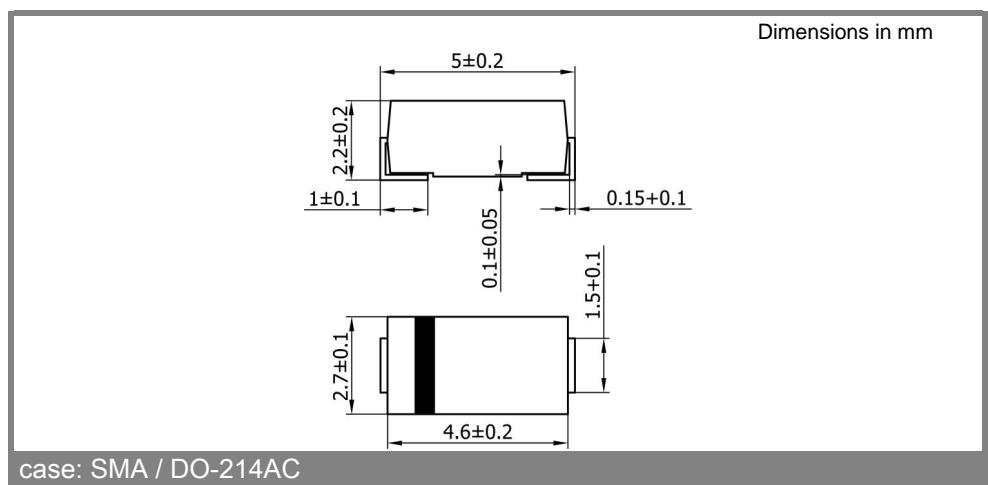

# US 1A ... US 1S

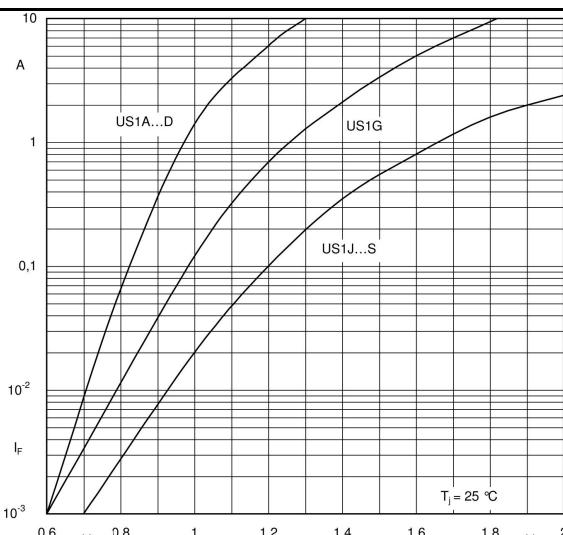


Fig. 1 Forward characteristic ( typical values )

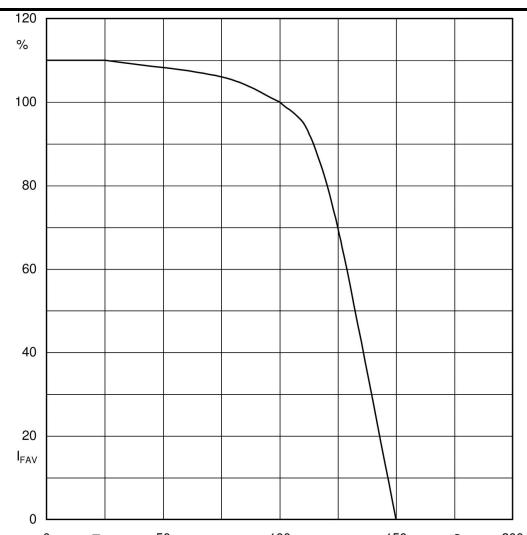


Fig. 2 Rated forward current vs. temp. of the terminals <sup>4)</sup>