




Metallized Polypropylene Capacitors

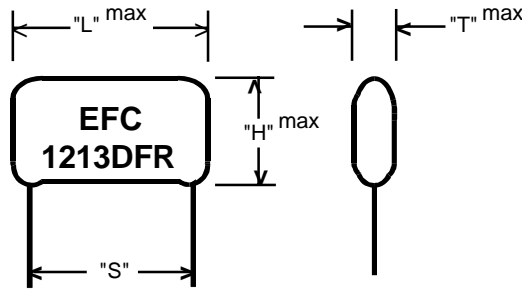

1213DFR

Epoxy Dipped (Radial Leads)

Lead Specs. - Tinned Copperweld

L	S	DIA.
10.0	7.5	0.6
12.5	10.0	0.6
18.0	15.0	0.8
26.0	22.5	0.8
31.0	27.5	0.8
44.0	38.0	1.0

(All dimensions in millimeters)

DIMENSIONS and RATINGS

Cap. μF	1213DFR-3 160 VDC			1213DFR-3 250 VDC			1213DFR-3 400 VDC			1213DFR-3 630 VDC												
	T	H	L	T	H	L	T	H	L	T	H	L										
.001	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0										
.0012	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.5	10.0										
.0015	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.5	10.0										
.0022	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	9.0	10.0										
.0027	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.0	10.0	4.0	9.0	10.0										
.0039	4.0	8.0	10.0	4.0	8.0	10.0	4.0	8.5	10.0	4.0	9.0	10.0										
.0047	4.0	8.0	10.0	4.0	8.0	10.0	4.0	9.0	10.0	4.0	9.0	12.5										
.0056	4.0	8.0	10.0	4.0	8.0	10.0	4.0	9.0	10.0	4.0	9.0	12.5										
.0068	4.0	8.0	10.0	4.0	8.0	10.0	4.5	9.0	10.0	4.5	9.0	12.5										
.0082	4.0	8.0	10.0	4.0	8.0	10.0	4.5	9.0	10.0	5.0	9.5	12.5										
.01	4.0	8.0	10.0	4.0	8.0	10.0	4.5	9.0	10.0	5.0	10.0	12.5										
.012	4.0	8.0	10.0	4.0	8.0	10.0	4.5	9.0	12.5	5.5	11.0	12.5										
.015	4.0	8.0	10.0	4.0	8.5	10.0	4.5	9.0	12.5	6.0	12.0	12.5										
.018	4.0	8.0	10.0	4.0	8.5	10.0	4.5	9.0	12.5	5.5	11.0	18.0										
.022	4.0	8.0	10.0	4.0	9.0	10.0	5.0	9.5	12.5	6.0	12.0	18.0										
.027	4.0	8.5	10.0	4.0	9.0	10.0	5.0	10.0	12.5	6.5	12.0	18.0										
.033	4.0	8.5	10.0	4.5	9.0	12.5	5.5	11.0	12.5	6.5	12.5	18.0										
.039	4.0	9.0	10.0	5.0	10.0	12.5	6.0	12.0	12.5	7.0	13.0	18.0										
.047	4.0	9.0	10.0	5.5	10.5	12.5	6.5	12.5	12.5	7.5	13.5	18.0										
.056	4.0	9.0	10.0	5.5	11.0	12.5	5.5	11.0	18.0	8.0	14.0	18.0										
.068	4.0	9.0	12.5	6.0	12.0	12.5	6.5	12.5	18.0	8.5	16.0	18.0										
.082	4.5	9.0	12.5	5.0	10.0	18.0	7.0	13.0	18.0	8.0	14.0	26.0										
.1	4.5	9.5	12.5	5.5	11.0	18.0	7.5	14.0	18.0	8.5	16.0	26.0										
.12	5.0	10.0	12.5	6.0	12.0	18.0	8.0	14.5	18.0	9.0	16.5	26.0										
.15	5.5	11.0	12.5	6.5	12.5	18.0	8.5	16.0	18.0	9.5	18.0	26.0										
.18	6.0	12.0	12.5	7.0	13.0	18.0	8.0	14.0	26.0	9.5	17.0	31.0										
.22	5.5	11.0	18.0	7.5	14.0	18.0	8.5	16.0	26.0	10.0	19.0	31.0										
.27	6.0	12.0	18.0	8.5	15.5	18.0	9.0	16.5	26.0	10.5	20.0	31.0										
.33	6.5	12.5	18.0	7.5	14.0	26.0	9.5	18.0	26.0	12.0	22.0	31.0										
.39	7.0	13.0	18.0	8.0	14.5	26.0	9.5	18.0	31.0	13.0	23.0	31.0										
.47	7.5	13.5	18.0	8.5	15.0	26.0	10.0	19.0	31.0	14.0	25.0	31.0										
.56	8.0	14.5	18.0	9.0	16.5	26.0	11.0	20.0	31.0	15.0	27.0	31.0										
.68	8.5	16.0	18.0	9.5	18.0	26.0	12.0	22.0	31.0	17.0	32.0	31.0										
.82	8.0	14.5	26.0	9.5	17.0	31.0	13.0	23.0	31.0	15.0	27.0	44.0										
1.0	8.5	16.0	26.0	10.0	19.0	31.0	14.0	25.0	31.0	17.0	32.0	44.0										
1.2	9.0	16.5	26.0	11.0	20.0	31.0	15.0	27.0	31.0													
1.5	9.5	18.0	26.0	12.5	23.0	31.0	17.0	32.0	31.0													
1.8	9.5	18.0	31.0	13.0	24.0	31.0	15.0	27.0	44.0													
2.2	10.0	20.0	31.0	14.0	26.0	31.0	17.0	32.0	44.0													
2.7	11.5	21.0	31.0	15.5	28.0	31.0																
3.3	12.5	23.0	31.0	17.5	33.0	31.0																
3.9	13.5	25.0	31.0	16.5	28.0	44.0																
4.7	15.0	26.0	31.0	17.5	33.0	44.0																
5.6	16.0	28.0	31.0																			
6.8	17.0	30.0	31.0																			

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.

ELECTRONIC FILM CAPACITORS, INC.

Reidville Industrial Park * 41 Interstate Lane * WATERBURY, CONNECTICUT 06705

Phone (203) 755-5629 * E-Mail: efc@filmcapacitors.com * FAX (203) 755-0659