


1. CONFIGURATION & DIMENSIONS :

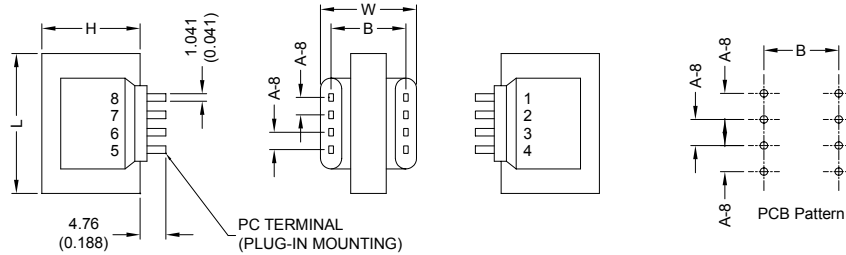

TYPE DPC 8 PINS

UNIT : mm (inch)

SIZE (VA)	L	W	H	A-8 8 PIN	B	WT. (gram)	OPTIONAL BRACKET *		
							NO.	MW	MD
1.2	35.30 (1.390)	30.00 (1.181)	30.16 (1.188)	5.08 (0.200)	25.40 (1.000)	118.70	---	---	---

2. SCHEMATIC :



3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- a. Primary Voltage AC 115/230 V 50/60 Hz .
- b. No Load Primary Current Less Than 10mA .
- c. Secondary Voltage (±5%) Series AC - V .
Parallel AC - V .
- d. Secondary Load Current Series 120mA .
Parallel 240mA .
- e. Full Load Primary Current Less Than - mA .
- f. Full Load Secondary Voltage (±5%) Series 10.00V .
Parallel 5.00V .
- g. DC Resistance
Pin 1-2 Primary-1 = 1050 Ohm .
Pin 3-4 Primary-2 = 1275 Ohm .
Pin 5-6 Secondary = - Ohm .
Pin 7-8 = - Ohm .
- h. Insulation Resistance DC 500V 100Meg Ohm Of More .
- i. Withstand Voltage (Hi-Pot) AC 1500V 60Hz 1 Minutes .
- j. Temperature Rise Less Than 60 Deg C .
- k. Core Size EI-35 x 10.00 m/m .

l. Turns & Wire Gauge

Primary-1	Pin 1-2	Turns	Diameter	m/m
Primary-2	Pin 3-4	Turns	Diameter	m/m
Secondary-1	Pin 5-6	Turns	Diameter	m/m
Secondary-2	Pin 7-8	Turns	Diameter	m/m



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

17.03.2008



SUPERWORLD ELECTRONICS (S) PTE LTD