

Applications

- Portable equipment battery applications
- SMPS applications

Features


- Low power rectified
- High reliability
- Low forward voltage: $V_F=0.5V$ Typ. @ $I_F=1A$
- Low reverse current: $I_R=4 \mu A$ Typ. @ $V_R=40V$

Ordering Information

Type No.	Marking	Package Code
SDB1040	1A4	SOD-123

Outline Dimensions

unit : mm

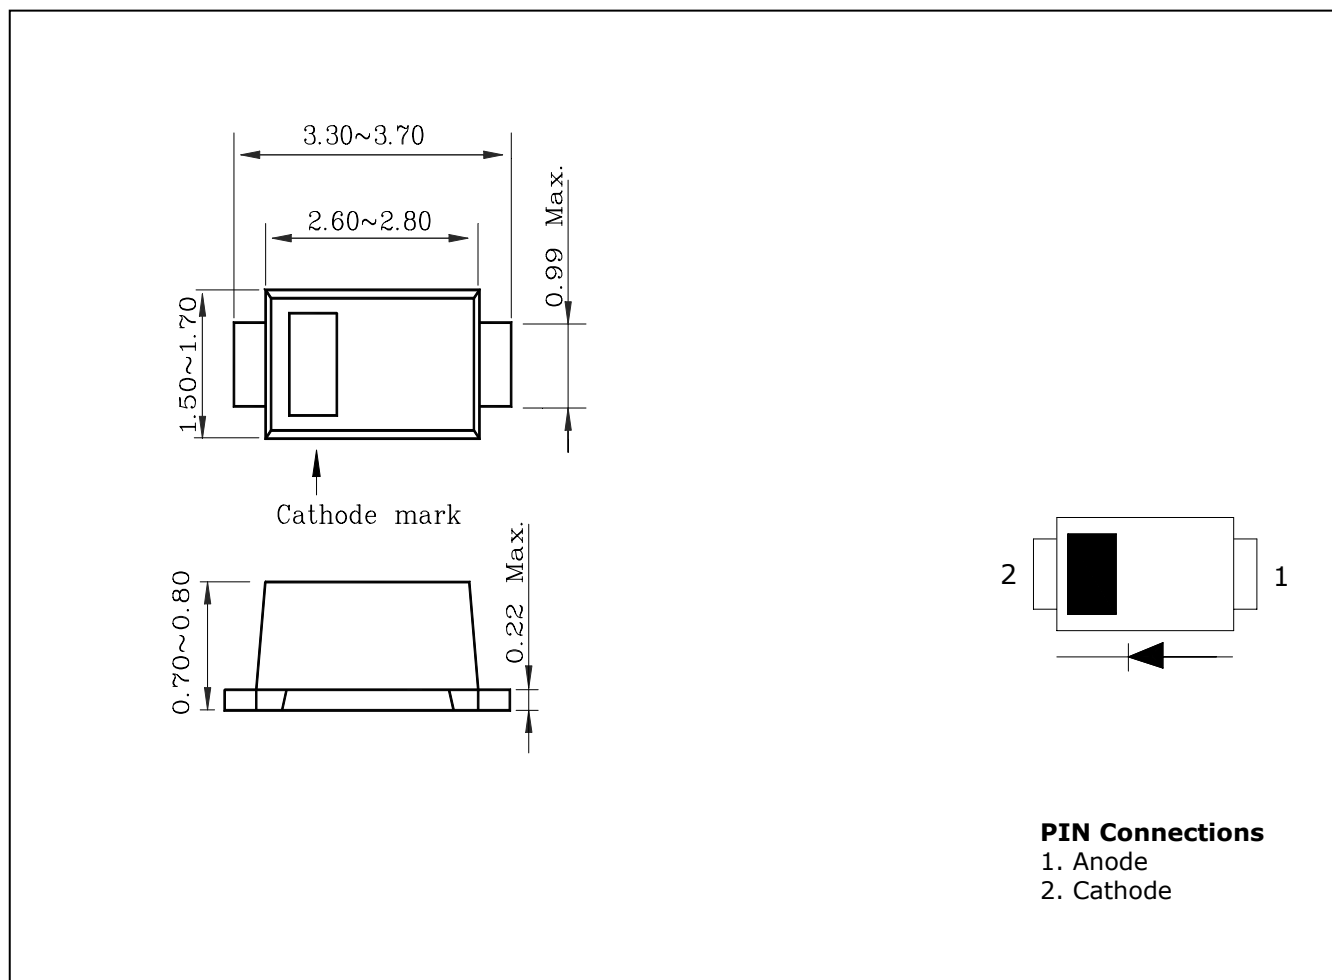

Absolute Maximum Ratings

(Ta=25°C)

Characteristic	Symbol	Rating	Unit
Peak reverse voltage	V_{RM}	40	V
Reverse voltage	V_R	40	V
Average rectified forward current	I_F	1.0	A
Non-repetitive peak surge forward current (Non-repetitive 60Hz)	I_{FSM}	30	A
Junction temperature	T_J	150	°C
Storage temperature range	T_{stg}	-55~150	°C


Electrical Characteristics

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward voltage	V_F^{**}	$I_F=1A$	-	0.5	0.55	V
Reverse current	I_R	$V_R=40V$	-	-	200	μA
Total capacitance	C_T	$V_R=10V, f=1MHz$	-	50	-	pF

※ Pulse test : $t_p \leq 250 \mu s$, Duty cycle $\leq 2\%$

※ Recommend PCB solder land (Unit : mm)

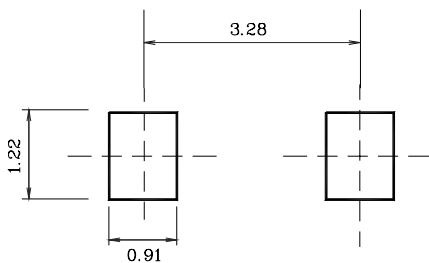

Electrical Characteristic Curves

Fig. 1 $I_F - V_F$

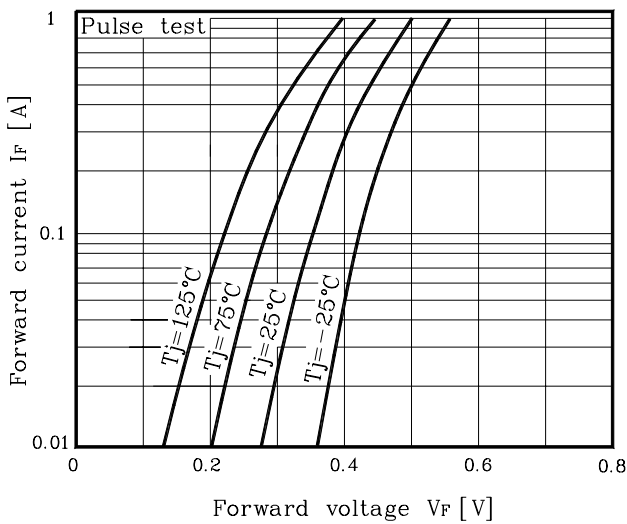


Fig. 2 $I_R - V_R$

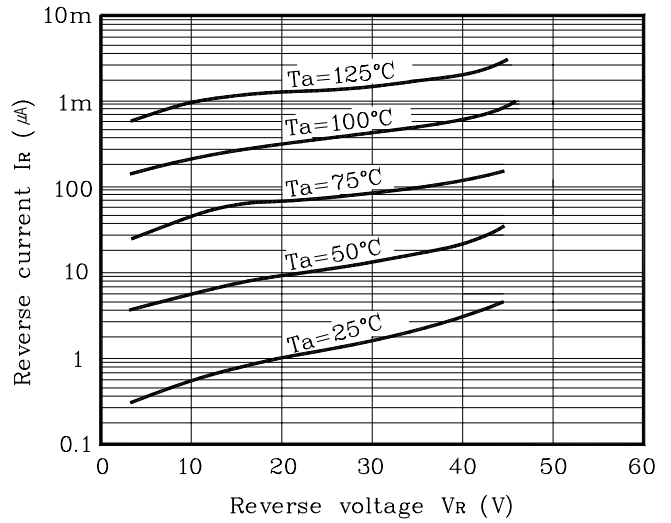


Fig. 3 $C_T - V_R$


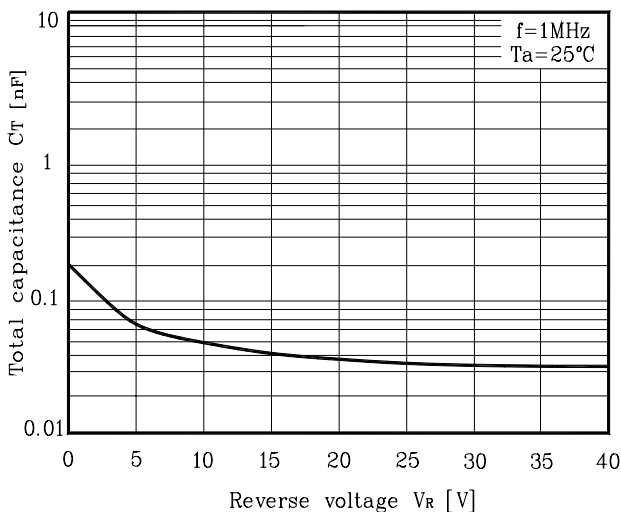


Fig. 4 $P_F - I_F$

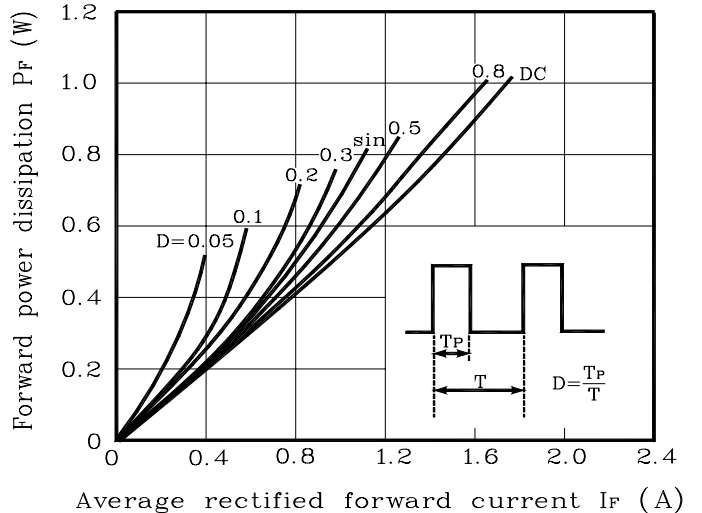

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.