



1. Dimensions:

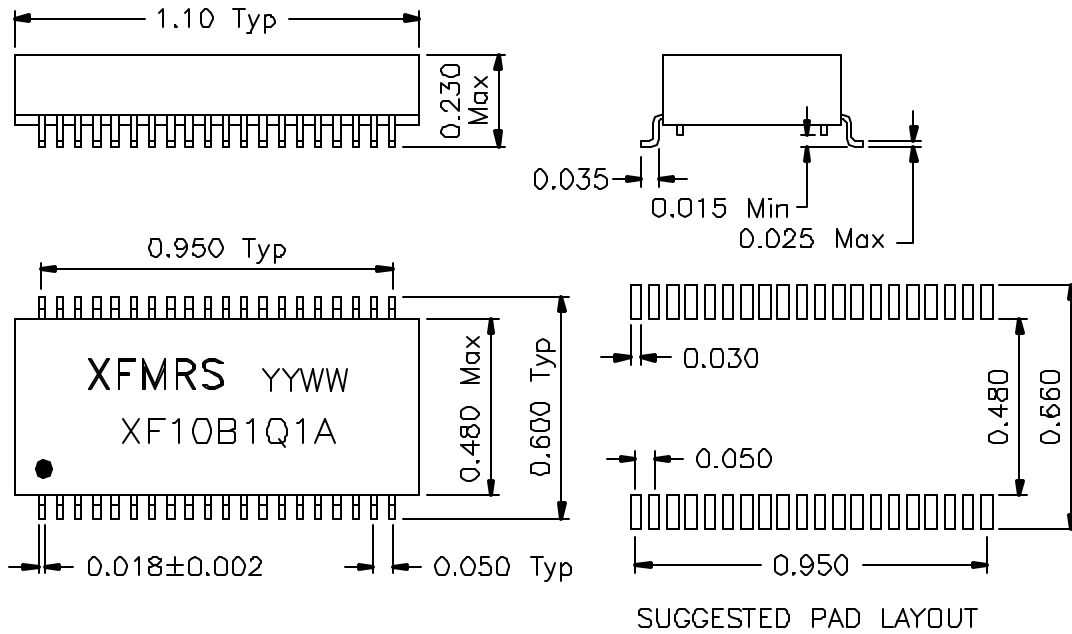

2. Schematic:

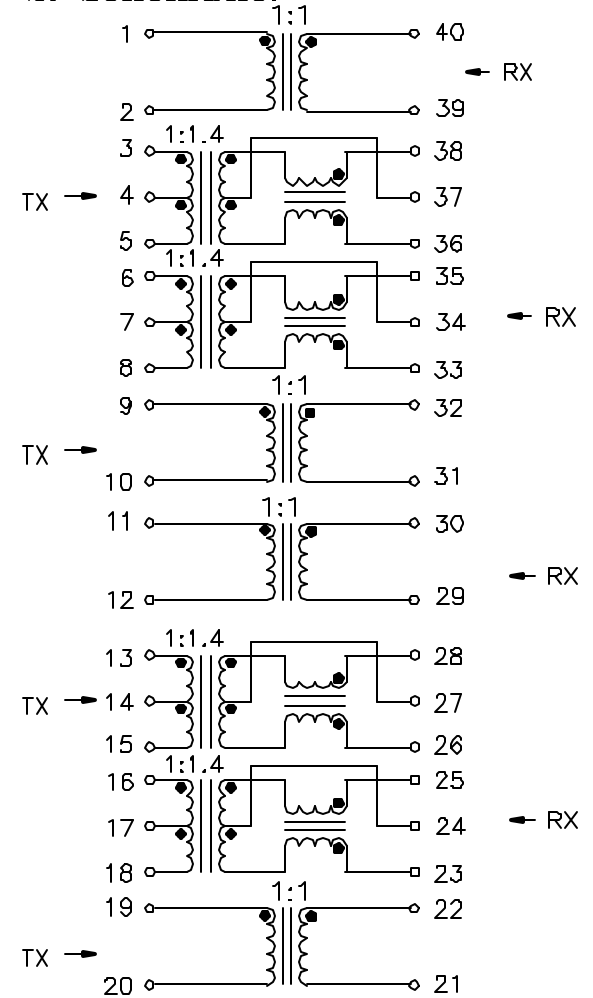

3. Electrical Specifications: @25°C

- Turns Ratio: PRI/SEC TX 1CT:1.4CT RX 1:1
- Isolation Voltage: 1500 Vrms (Input to Output)
- PRI OCL: 150uH Minimum @10KHz,100mV
- PRI Leakage Inductance. 0.3uH Maximum @1MHz 100mV SEC Shorted
- PRI/SEC Cw/w: 10pF Max@1MHz 100mV
- Pri DCR: 0.350 Ohms Max (TX & Rx)
- SEC DCR: 0.35 Ohms Max (RX Only)
- SEC DCR: 1.2 Ohms Max (Tx Only)

DOC REV.: A/1

XFMRS Inc	Title: Quad Port 10BASE-T Module		
	UNLESS OTHERWISE SPECIFIED		P/N: XF1506Q1
	TOLERANCES: .xxx ±0.010		REV. A
	Dimensions in INCH		DWN. 李清儿 Apr-07-99
SCALE 2:1 SHT 1 OF 1	CHK. 孙小悦 Apr-07-99	APP. Joe Huff Apr-08-99	