

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0712510027](#)
Status: **Active**
Description: 1.27mm (.050") Pitch DIMM Socket, Vertical, Multiple Keys, Plastic Peg, 168 Circuits, 3.3V Synchronous

Documents:
[3D Model](#) [Product Specification PS-71243-9999 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General


Product Family Memory Module Sockets
Series [71251](#)
Comments Function Key Offset Left, Voltage Key Center
Component Type Memory Module
JEDEC Outline MO-161
Product Name DIMM

Physical

Circuits (Loaded) 168
Circuits (maximum) 168
Color - Resin Black, Natural
Durability (mating cycles max) 25
Entry Angle Vertical (Top Entry)
Flammability 94V-0
Function Key Offset Left
Keying to Mating Part Yes
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
PC Tail Length (in) 0.127 In
PC Tail Length (mm) 3.23 mm
PCB Locator Yes
PCB Retention Yes
PCB Thickness Recommended (in) 0.062 In
PCB Thickness Recommended (mm) 1.57 mm
Packaging Type Tray
Pitch - Mating Interface (in) 0.050 In
Pitch - Mating Interface (mm) 1.27 mm
Pitch - Term. Interface (in) 0.050 In
Pitch - Term. Interface (mm) 1.27 mm
Plating min: Mating (µin) 2
Plating min: Mating (µm) 0.05
Plating min: Termination (µin) 150
Plating min: Termination (µm) 3.81
Temperature Range - Operating -40°C to +85°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 1A
Voltage - Maximum 100V AC (RMS)/DC
Voltage Key Center

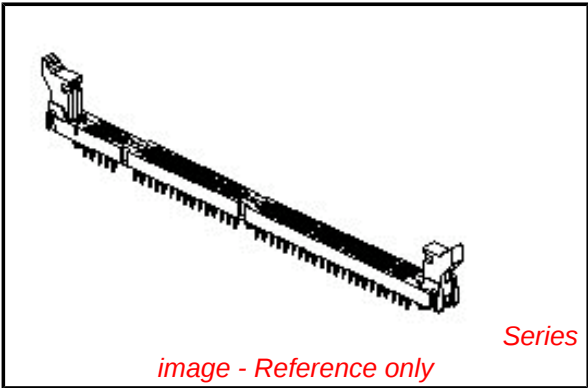

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[71251Series](#)

Mates With
JEDEC MO-161 modules

Solder Process Data

Lead-free Process Capability

Wave Capable (TH only)

Material Info

Reference - Drawing Numbers

Product Specification

PS-71243-9999

Sales Drawing

SDA-71251-0***

This document was generated on 04/13/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

1. CARD SLOT ACCEPTS .050±.004 (1.27±0.10) MODULE THICKNESS.
(MEASURED OVER P.C. PADS).
2. ALL PEGS ARE INTERFERENCE FITS TO PCB UNLESS NOTED ON THE DWG.
3. REFER TO PRODUCT SPEC PS-71243-9999 FOR PERFORMANCE SPECIFICATIONS.
4. PRODUCT IS PACKAGED IN TRAYS.
5. RECOMMENDED MODULE LAYOUT SHALL BE PER JEDEC MO-161.
6. RECOMMENDED PLATING ON MODULE PADS: 30 MICROINCH/(0.76 MICROMETER) MINIMUM
HARD GOLD (Au) OVER 79 MICROINCH/(2.0 MICROMETER) MINIMUM NICKEL (Ni).
7. SEE CHART FOR HOLE SIZE AND PRESENCE AND PLATING OPTION.
8. PRODUCT WILL HAVE DATE CODE STAMPED ON SIDE OF HOUSING.

MATERIALS:

HOUSING - GLASS FILLED LIQUID CRYSTAL POLYMER (LCP), UL 94V-0, COLOR: BLACK.
TERMINAL- PHOSPHOR BRONZE
LATCHES - GLASS FILLED HIGH TEMPERATURE NYLON, UL 94V-0, COLOR: IVORY.



PLATING:

CONTACT AREA: OPTION A: GOLD (Au) FLASH: THICKNESS=2-10 MICROINCH/(0.05-0.25 (0.05-0.25 MICROMETER), OVER PALLADIUM-NICKEL (Pd-Ni): THICKNESS=30 MICROINCH/(0.76 MICROMETER) MINIMUM.
OPTION B: GOLD (Au) FLASH: THICKNESS=2-10 MICROINCH/(0.05-0.25 MICROMETER), OVER PALLADIUM-NICKEL (Pd-Ni): THICKNESS=20 MICROINCH/(0.51 MICROMETER) MINIMUM.

SOLDER TAILS: TIN (Sn): THICKNESS=150 MICROINCH/(3.81 MICROMETER) MINIMUM.
UNDERPLATE: NICKEL (Ni) OVER ENTIRE CONTACT.

NOTE FOR LEAD FREE CONVERSION:



THE PRIMARY SHIPPING CARTON WILL BE
 LABELED "COMPLIANT TO RoHS DIRECTIVE
 2002/95/EC AND ELV ANNEX II OF
 DIRECTIVE 2000/53/EC". CARTONS
 WITHOUT THIS LABEL MAY CONTAIN
 PRODUCT WITH LEAD.

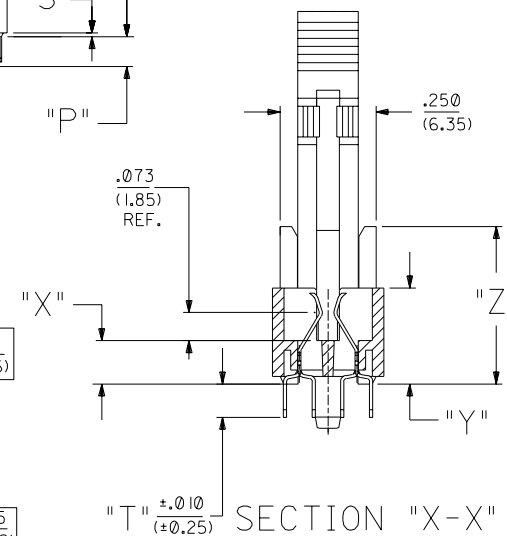

SCALE 4:1

			DI	ECR# U60361 9-18-95 JCL
	3	H	D	REVISED PER ECR# U51288 8-4-95 JCL
	2	F3		
	I	HI		
MFG.	SH.	REV.	LTR.	REVISIONS

DIMENSIONS SHOWN (METRIC) INCH		REVISE ONLY ON CAD SYSTEM									
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		TITLE									
<table><tr><th>INCH</th><th>METRIC</th></tr><tr><td>3 PLACE ± .005</td><td>---</td></tr><tr><td>2 PLACE ± ---</td><td>± 0.13</td></tr><tr><td>1 PLACE ---</td><td>± 0.25</td></tr></table>		INCH	METRIC	3 PLACE ± .005	---	2 PLACE ± ---	± 0.13	1 PLACE ---	± 0.25	.050/(1.27) PITCH MULTI-KEY 168 CKT DIMM RAM ASSY 17.8mm LATCH SALES DWG	
INCH	METRIC										
3 PLACE ± .005	---										
2 PLACE ± ---	± 0.13										
1 PLACE ---	± 0.25										
DRAFT WHEN APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MOLEX INCORPORATED 1515 LILE, U.S.A. 60932 SHEET NO. 1 OF 3 DATE 10/10/94									
DRWG. BY: DCB APP'D: DCB CHK'D: DCB SCALE: 2CB		PART NO. SEE CHART DWG. NO. SDA-71251-0***									
FILE NAME 571251-01		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.									

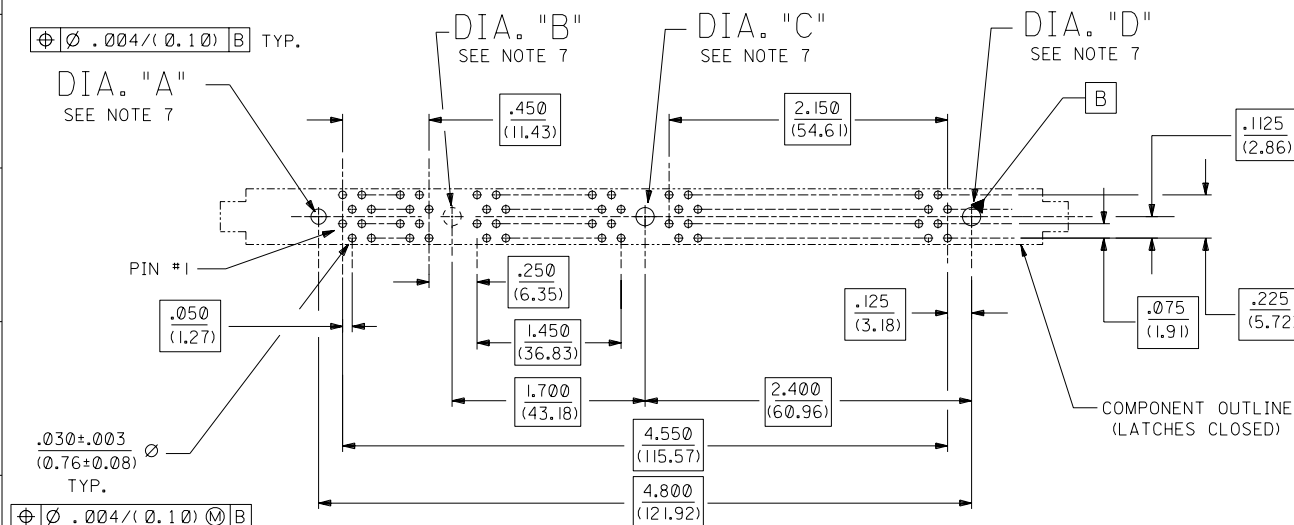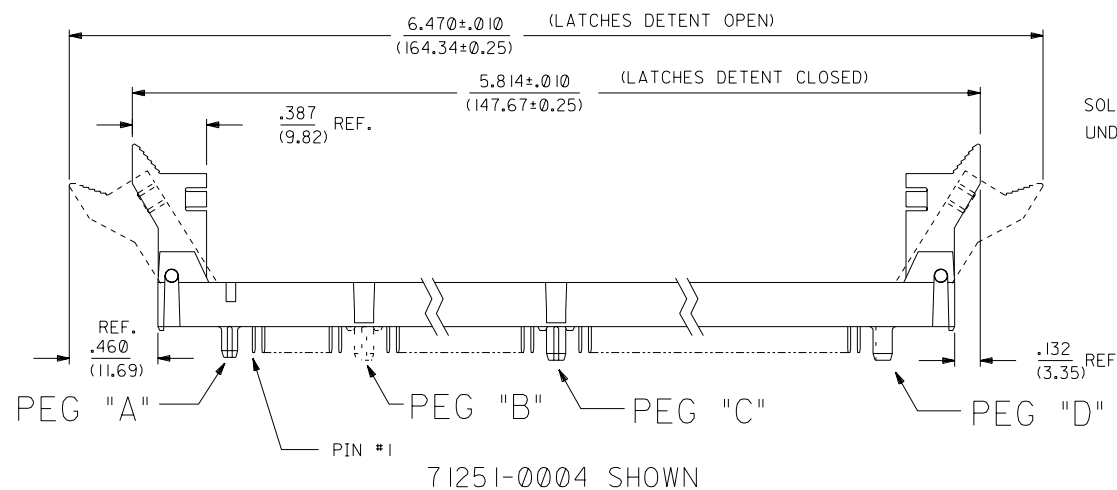


RECOMMENDED
P.C. BOARD HOLE PATTERN
(CONNECTOR SIDE)

13		12		11		10		9		8		7		6		71251		4		3		2		1	
PART NUMBER	COLOR	DESCRIPTION	FUNCTION KEY	VOLTAGE KEY	DIA. "A"	DIA. "B"	DIA. "C"	DIA. "D"	DIM. "H"	DIM. "P"	DIM. "S"	DIM. "T"	DIM. "W"	DIM. "X"	DIM. "Y"	DIM. "Z"	CONTACT AREA PLATING								
71251-0001	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	.080±.002 (2.03±0.05)	NONE	.093 +.003/-0.000 (2.36+0.08/-0.00)	.093 +.003/-0.000 (2.36+0.08/-0.00)	1.700 (43.18)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A								
71251-0004	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	.080±.002 (2.03±0.05)	NONE	.093 +.003/-0.000 (2.36+0.08/-0.00)	.093 +.003/-0.000 (2.36+0.08/-0.00)	1.700 (43.18)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A								
71251-0012	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	.080±.002 (2.03±0.05)	NONE	.093 +.003/-0.000 (2.36+0.08/-0.00)	.093 +.003/-0.000 (2.36+0.08/-0.00)	1.661 (42.19)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A								
71251-0013	BLACK	5.0 VOLT UNBUFFERED	OFFSET RIGHT	OFFSET LEFT	.080±.002 (2.03±0.05)	NONE	.093 +.003/-0.000 (2.36+0.08/-0.00)	.093 +.003/-0.000 (2.36+0.08/-0.00)	1.661 (42.19)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A								
71251-0016	BLACK	3.3 VOLT SYNCHRONOUS	OFFSET LEFT	CENTER	.080±.002 (2.03±0.05)	NONE	.093 +.003/-0.000 (2.36+0.08/-0.00)	.093 +.003/-0.000 (2.36+0.08/-0.00)	1.739 (44.17)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A								
71251-0017	BLACK	5.0 VOLT SYNCHRONOUS	OFFSET LEFT	OFFSET LEFT	.080±.002 (2.03±0.05)	NONE	.093 +.003/-0.000 (2.36+0.08/-0.00)	.093 +.003/-0.000 (2.36+0.08/-0.00)	1.739 (44.17)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A								

NOTES:


1. STRAIGHTNESS OF MODULE APPLIES TO THE AREA FROM THE BOTTOM OF THE CARD UP .157/(4.00).
2. IF TIE BARS ARE ATTACHED TO PADS, THE TIE BAR SHOULD BE ON AN INTERNAL LAYER, SO THAT THE REMNANT CANNOT CAUSE DAMAGE TO THE CONTACTS.

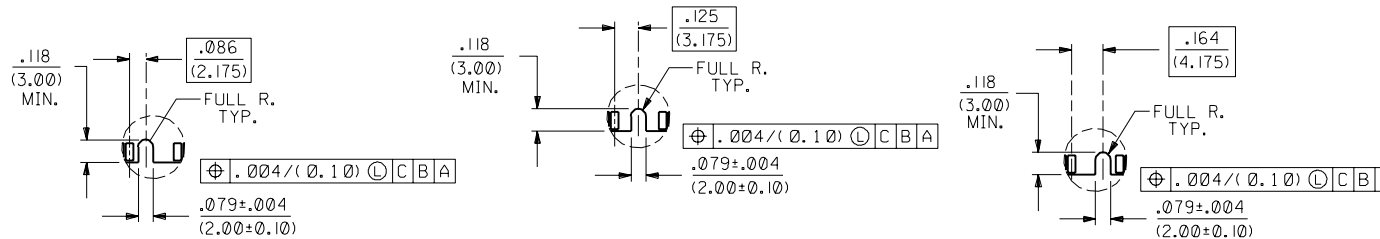

OFFSET LEFT KEY

CENTERED KEY

OFFSET RIGHT KEY

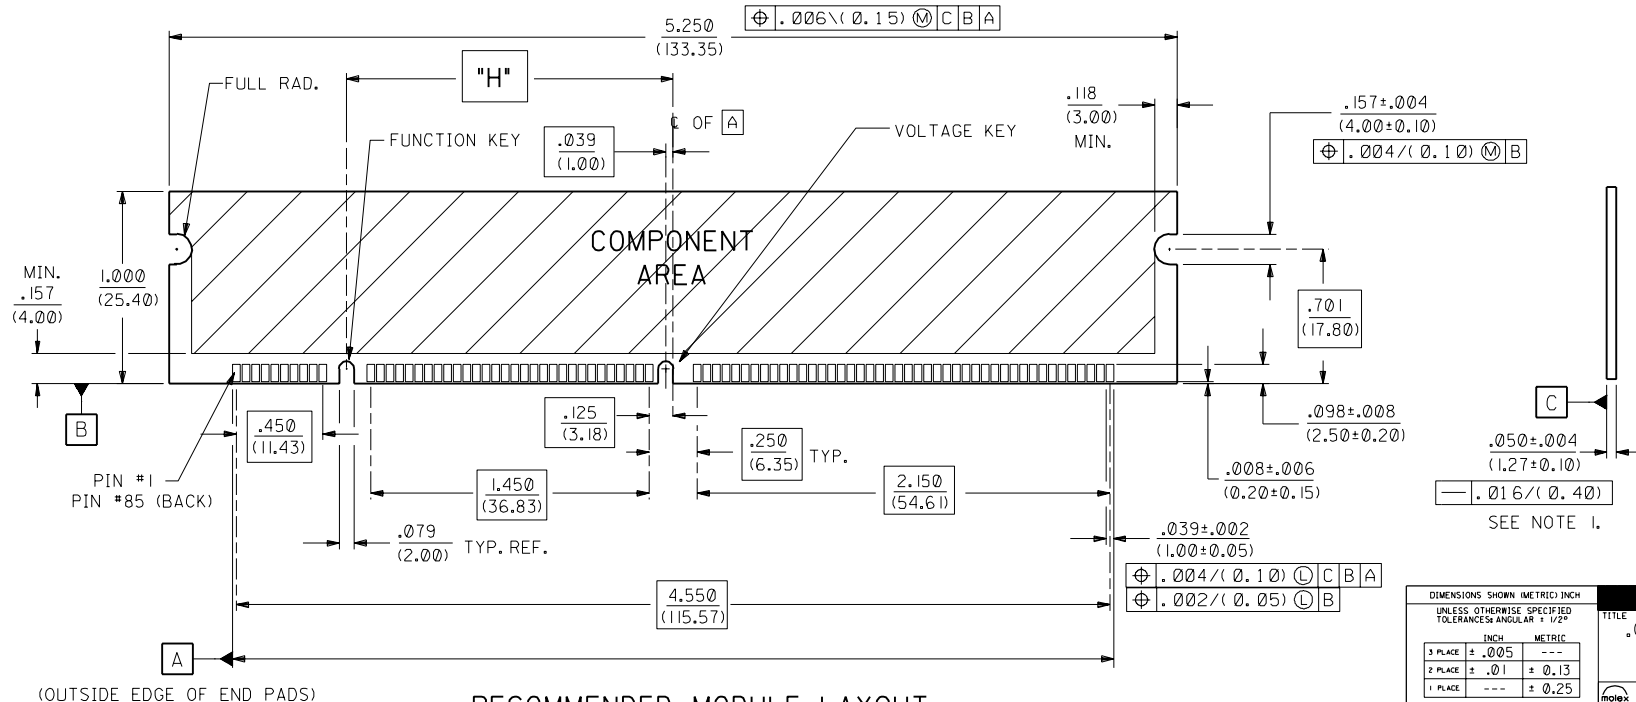

RECOMMENDED MODULE LAYOUT
168 CKT 5.0V DRAM SHOWN

F3	SEE SHEET I
F2	SEE SHEET I
F1	SEE SHEET I
F	SEE SHEET I
E1	SEE SHEET I
E	SEE SHEET I
D2	SEE SHEET I
D1	SEE SHEET I
D	SEE SHEET I
C	SEE SHEET I
B1	SEE SHEET I
B	SEE SHEET I
A	SEE SHEET I

DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES ANGULAR ± 1/2°		REVISE ONLY ON CAD SYSTEM	
5 PLACE ± .005	INCH	TITLE .050/(1.27) PITCH MULTI-KEY 168 CKT DIMM RAM ASSY 17.8mm LATCH SALES DWG.	
2 PLACE ± .01	METRIC	MOLEX INCORPORATED SHEET NO. 2 DATE 10/10/94	
1 PLACE --- ± 0.25		PART NO. 1151EJLL 60532 DRWG. NO. SDA-71251-0...	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART	
DRW'G. BY DCB	CHK'D. BY DCB	FILE NAME ST 25102	
APP'D. BY DCB	SCALE 2: 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	

I3		I2		I1		I0		9		8		7		6		71251		4		3		2		1		
PART NUMBER	COLOR	DESCRIPTION	FUNCTION KEY	VOLTAGE KEY	DIA. "A"		DIA. "B"		DIA. "C"		DIA. "D"		DIM. "H"	DIM. "P"	DIM. "S"	DIM. "T"	DIM. "W"	DIM. "X"	DIM. "Y"	DIM. "Z"	CONTACT AREA PLATING					
71251-0001	BLACK	3.3 VOLT STD DRAM	SEE SHEET 2																		OPTION A					
71251-0002	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A					
71251-0003	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A					
71251-0004	BLACK	5.0 VOLT STD DRAM	SEE SHEET 2																		OPTION A					
71251-0005	BLACK	5.0 VOLT UNBUFFERED	OFFSET RIGHT	OFFSET LEFT	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.661}{(42.19)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.102}{(2.59)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A					
71251-0006	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A					
71251-0007	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.140}{(3.56)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A					
71251-0008	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A					
71251-0009	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.102}{(2.59)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A					
71251-0010	BEIGE	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.112}{(2.84)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A					
71251-0011	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A					
71251-0012	BLACK	3.3 VOLT UNBUFFERED	SEE SHEET 2																		OPTION A					
71251-0013	BLACK	5.0 VOLT UNBUFFERED	SEE SHEET 2																		OPTION A					
71251-0014	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.661}{(42.19)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.112}{(2.84)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A					
71251-0015	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.117}{(2.97)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A					
71251-0016	BLACK	3.3 VOLT SYNCHRONOUS	SEE SHEET 2																		OPTION A					
71251-0017	BLACK	5.0 VOLT SYNCHRONOUS	SEE SHEET 2																		OPTION A					
71251-0018	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.661}{(42.19)}$	$\frac{.140}{(3.56)}$	$\frac{.035}{(0.89)}$	$\frac{.102}{(2.59)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A					
71251-0019	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION B					
71251-0020	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.140}{(3.56)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION B					
71251-0021	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION B					
71251-0022	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.661}{(42.19)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION B					
71251-0023	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.661}{(42.19)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.102}{(2.59)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A					
71251-0024	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.661}{(42.19)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.105}{(2.67)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A					
71251-0026	BEIGE	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.090}{(2.29)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A					
71251-0027	BLACK	3.3 VOLT SYNCHRONOUS	OFFSET LEFT	CENTER	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{1.739}{(44.17)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A					
																	DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES ANGULAR ± 1/2°				REVISE ONLY ON CAD SYSTEM					
																	INCH METRIC				TITLE 050/(1.27) PITCH MULTI-KEY 168 CKT DIMM RAM ASSY 17.8mm LATCH SALES DWG.					
																	3 PLACE ± .005 --- 2 PLACE ± .01 ± 0.13 1 PLACE --- ± 0.25				MOLEX INCORPORATED SHEET NO. 3 DATE 12/07/95 L15L,ILL. 60532 U.S.A.					
																	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				PART NO. SEE CHART DRWG. NO. SDA-71251-0...					
																	DRAWN BY DCB CHK'D BY DCB SCALE 2:1				FILE NAME ST 25103 CP					
													LTR.	REVISIONS		LTR.	REVISIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
I3		I2		I1		I0		9		8		7		6		5		4		3		2		1		