


2.54 X 2.54mm DUAL ROW PIN HEADER EASY BROKEN TYPE

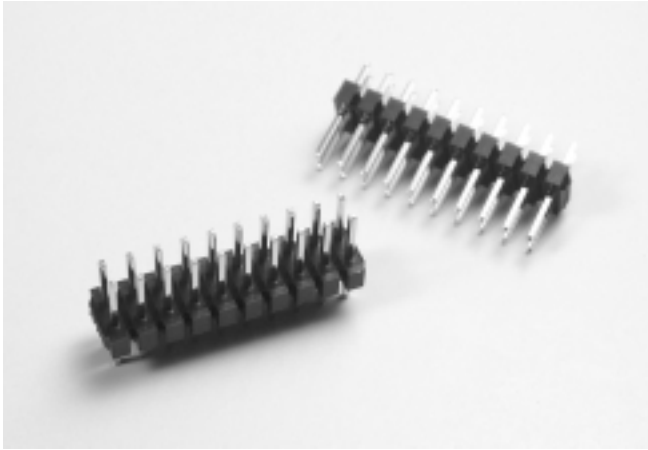


254322MS Series

Mates With SUYIN 254100, 254900, 254901, 254906 Series

Specifications:

- 4~80 Circuits
- Insulator Material : P.B.T UL94V-0
- Operating Type Range : -40°C To +105°C
- Terminal Material : Brass
- Plating : Gold Plated
- Max. Current Rating : 1.5A
- Max. Voltage Rating : 250V AC
- Dielectric Strength : 500V AC (Min. 60 Seconds)

2.54
mm

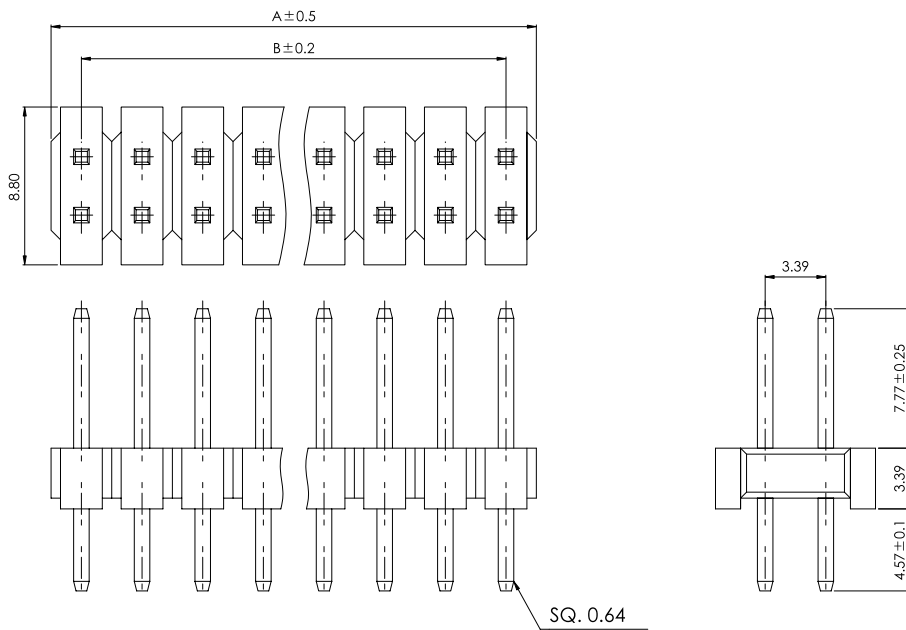

Order Information

254322MS□□□□□03ZU
1 2 3 4 5

1. 'S': Straight DIP Type
2. No. of Pins
3. Plating
4. Color 'Z': Black
5. Package

'U': Tube Package Without CAP

Reference Page 11

Dimension Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
254322MS004□□03ZU	5.08	2.54	254322MS026□□03ZU	33.02	30.48
254322MS006□□03ZU	7.62	5.08	254322MS028□□03ZU	35.56	33.02
254322MS008□□03ZU	10.16	7.62	254322MS030□□03ZU	38.10	35.56
254322MS010□□03ZU	12.70	10.16	254322MS032□□03ZU	40.64	38.10
254322MS012□□03ZU	15.24	12.70	254322MS034□□03ZU	43.18	40.64
254322MS014□□03ZU	17.78	15.24	254322MS036□□03ZU	45.72	43.18
254322MS016□□03ZU	20.32	17.78	254322MS038□□03ZU	48.26	45.72
254322MS018□□03ZU	22.86	20.32	254322MS040□□03ZU	50.80	48.26
254322MS020□□03ZU	25.40	22.86	254322MS044□□03ZU	55.88	53.34
254322MS022□□03ZU	27.94	25.40	254322MS050□□03ZU	63.50	60.96
254322MS024□□03ZU	30.48	27.94	254322MS080□□03ZU	101.6	99.06

Recommended P.C.B. Layout

