




GBJ/KBJ2005 THRU GBJ/KBJ210

SINGLE PHASE 2.0 AMPS. GLASS PASSIVATED BRIDGE RECTIFIERS

Voltage Range
50 to 1000 Volts
Current
2.0 Amperes

FEATURES

- UL Recognized File #230084
- Surge overload rating - 50 amperes peak
- Ideal for printed circuit board
- Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- Mounting position: Any

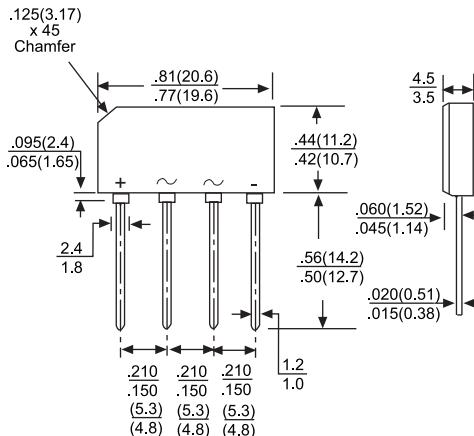

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Resistive or inductive load, 50Hz.

For capacitive load, derate current by 20%

Type Number		GBJ KBJ 2005	GBJ KBJ 201	GBJ KBJ 202	GBJ KBJ 204	GBJ KBJ 206	GBJ KBJ 208	GBJ KBJ 210	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T _A = 50°C	I _{F(AV)}				2.0				A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load	I _{FSM}				50.0				A
Maximum Instantaneous Forward Voltage Drop per Leg @1.0A	V _F				1.0				V
Maximum Reverse Current at Rated @T _A = 25°C DC Blocking Voltage per Leg @T _A = 100°C	I _R				5				uA mA
					1.0				
Operating Temperature Range	T _J				-55 to +125				°C
Storage Temperature Range	T _{STG}				-55 to +150				°C