


AC-Capacitors (Metallized Polypropylene Film-MKP), AC 400V

Dimensions in millimeters

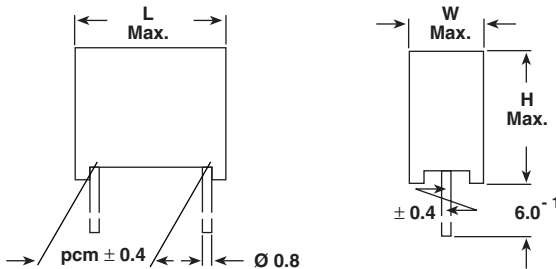

FEATURES

Product is completely lead (Pb)-free.
Product is RoHS compliant.



TECHNICAL DATA

See page 68 (Document No. 26522)



TERMINALS

Radial tinned copper
(longer leads or insulated leads on request)

RoHS
COMPLIANT

RATED VOLTAGE

AC 400V, 50/60Hz

COATING

Plastic case epoxy sealed, flame retardant
UL-class 94V-0

**CLIMATIC TESTING CLASS ACC. TO
EN 60068-1
25/085/21**

CAPACITANCE	TOL. J = ± 5% K = ± 10% M = ± 20%	PITCH (mm)	BOX NO.	DIMENSIONS W x H x L (mm) (+ 0.2/- 0.4mm)	WEIGHT (Lead Length ≤ 6-1mm) (g)	QUANTITY PACKAGE (Lead Length ≤ 6-1mm) (pcs)*	ORDERING CODE**
0.01	μFX2	M	04	6.3 x 11.3 x 12.8	0.9	750	MKP1844 -310 -4000
0.015	μFX2	M	03	5.3 x 10.3 x 17.8	1.2	1000	MKP1844 -315 -4000
0.022	μFX2	M	04	6.3 x 11.3 x 17.8	1.7	750	MKP1844 -322 -4000
0.033	μFX2	M	07	7.3 x 13.3 x 17.8	2.1	450	MKP1844 -333 -4000
0.047	μFX2	M	08	8.3 x 14.3 x 17.8	2.5	325	MKP1844 -347 -4000
0.068	μFX2	M	11	7.3 x 15.3 x 26.3	3.5	235	MKP1844 -368 -4000
0.1	μFX2	M	12	8.3 x 16.3 x 26.3	4.2	200	MKP1844 -410 -4000
0.15	μFX2	K	13	10.3 x 18.3 x 26.3	5.9	170	MKP1844 -415 -4000
0.22	μFX2	K	14	11.0 x 20.3 x 31.3	8.9	125	MKP1844 -422 -4000
0.33	μFX2	K	15	13.0 x 23.3 x 31.3	11.2	110	MKP1844 -433 -4000
0.47	μFX2	K	18	14.0 x 24.3 x 31.3	13.2	100	MKP1844 -447 -4000
0.68	μFX2	K	16	14.0 x 24.3 x 41.3	16.2	80	MKP1844 -468 -4000
1.0	μFX2	K	19	15.5 x 28.3 x 41.3	21.2	70	MKP1844 -510 -4000


* Further information about packaging quantities with different leadlength and/or taped versions see Document No 26535 (Packing Quantities)

See page 16 - use Box No as reference

**These capacitors can be delivered on continuous tape and reel - see www.vishay.com/doc?26535

The ordering code is MKP 1844 - . . . - 4900 at H = 16.5mm

MKP 1844 - . . . - 4901 at H = 18.5mm

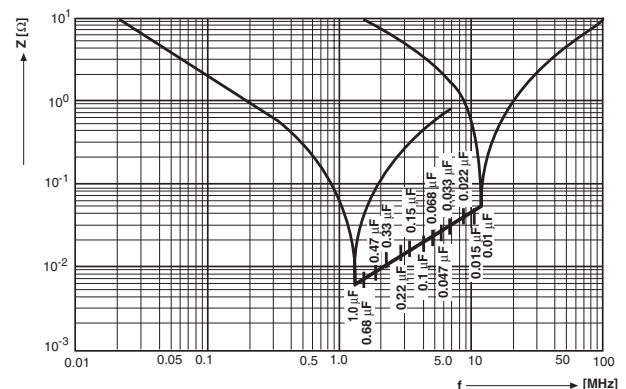

Impedance (Z) as a function of frequency (f)
at $T_a = 20^\circ\text{C}$ (average).
Measurement with lead length 6mm.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.