

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0192520158](#)
Status: **Active**
Overview: [wire management products](#)
Description: 149.86mm (5.900") Natural Cable Tie, 30 Pound Tensile Strength, with Mounting Hole

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Accessories
Series	19252
Application Tooling Part Link	192940002
Comments	Maximum bundle diameter = 35.05mm (1.38"); Mounting hole stud size = 8
Component Type	Cable Tie
Overview	wire management products
Product Name	N/A

Physical

Circuits (Loaded)	N/A
Lock to Mating Part	None
Packaging Type	Bag
Temperature Range - Operating	105°C

Material Info

Old Part Number	N-05-30-MH-9-C-LC
-----------------	-------------------

Reference - Drawing Numbers

Sales Drawing	SD-19252-001
---------------	--------------

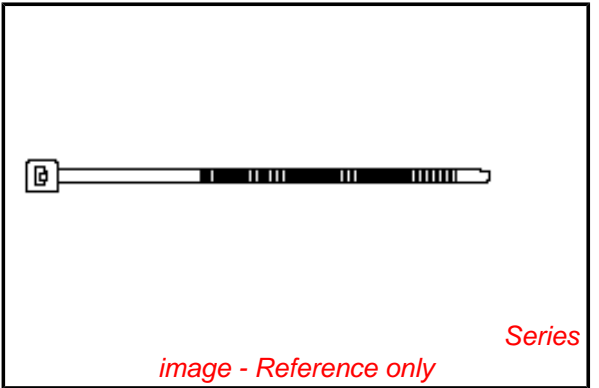


image - Reference only

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Halogen-Free Status

China RoHS



Not Reviewed

Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series


[19252Series](#)

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
ServiceGrade™ Economy Cable Tie Tool	0192940002



N-07-50-MH-9-C-XX

ⓓ

N = CABLE TIES

CABLE TIE LENGTH
INCHES
(ROUNDED)

TENSILE STRENGTH
18 = 18 LBS
40 = 40 LBS
50 = 50 LBS
120 = 120 LBS

TIE TYPE
(BLANK) = STANDARD TIE
ID = IDENTIFICATION
MH = MOUNTING HOLE

INTERNAL DESIGNATOR

AMOUNT PER PACKAGE
C = 100
D = 500
M = 1000

COLORS
0 = UV BLACK
9 = NATURAL
30 = HEAT STABILIZED

SALES DRAWING

REMOVE BASE INFO EC NO: ETC2007-0295 DRWN: TBOANN02007/02/13 CHKD: JMACNEIL 2007/02/13 APPR: JMACNEIL 2007/02/14	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY																			
	▽ 0 ▽ 0	<table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>3 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>2 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>1 PLACE</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td colspan="3">ANGULAR ± ---°</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± ---	± ---	1 PLACE	± ---	± ---	ANGULAR ± ---°			DIMENSION STYLE IN/MM		TITLE		19252 SERIES ENGINEERING NUMBERS CABLE TIES	
		mm	INCH																							
	4 PLACES	± ---	± ---																							
3 PLACES	± ---	± ---																								
2 PLACES	± ---	± ---																								
1 PLACE	± ---	± ---																								
ANGULAR ± ---°																										
DESCRIPTION	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWN BY B.ENDERL	DATE 04/05/11	MOLEX INCORPORATED																					
REV			CHECKED BY H.BEITZL	DATE 04/05/11	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-19252-001	SHEET NO. 1 OF 1																			