

## Band Multi-Channel Modules



### Key Features

- Cost effective
- Low insertion loss
- Extended temperature range
- High isolation
- Bi-directional operation
- Exceed Telcordia GR-1221 standards
- Exceptional reliability and environmental stability

### Applications

- Access/enterprise networks
- Metro networks
- Transport systems


JDSU band multi-channel modules are manufactured using laser welding technology to exceed Telcordia GR-1221 requirements. These devices demonstrate low loss, temperature insensitivity, and reliable performance in any system application. They are available in east/west and multiplexer/demultiplexer configurations.

JDSU band multi-channel modules enable networks for bi-directional and unidirectional communication of coarse wavelengths within the C band. Their wide passbands and efficient filter technology provide a low-cost wavelength management solution suitable for Access and Metro markets.


Easily customizable, JDSU band multi-channel modules can be configured from a standard list of packaging and connector options.

## 2

### Mux/Demux Configuration

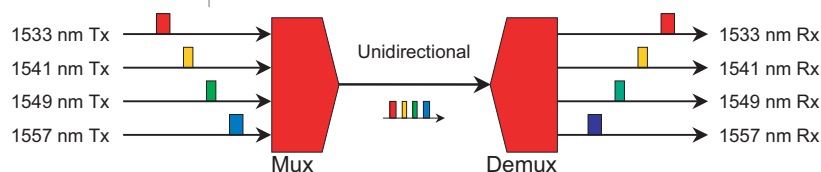

### East/West Configuration

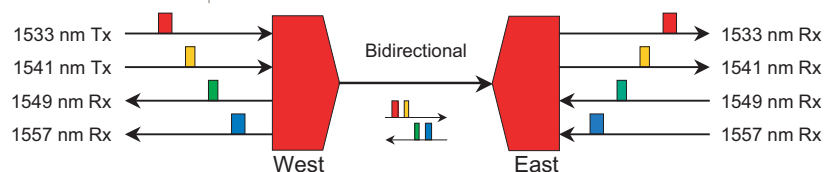

### Specifications

Parameter	Specification
Wavelength range	C Band 1528 nm to 1565 nm
Passband width	1533±3.5 nm, 1541±1.5 nm, 1549±1.5 nm, 1557±3.5 nm
Insertion loss <sup>1</sup> (any channel)	Maximum 2.0 dB
Insertion loss <sup>1</sup> (end to end)	Maximum 4.0 dB
Isolation <sup>2</sup> (adjacent channel)	Minimum 35 dB
Directivity	Minimum 45 dB
Return loss	Minimum 45 dB
Polarization dependent loss	Maximum 0.25 dB
Polarization mode dispersion	Maximum 0.1 ps
Optical power handling	Maximum 1 W
Operating temperature range	-5 to 75 °C
Storage temperature range	-40 to 85 °C
Package dimensions (W x D x H)	
CS cassette	6.86" x 5.07" x 1.38"
LGX cassette	6.36" x 5.10" x 1.15"

1. Losses include one connector.

2. Isolation values stated are for demultiplexers or the receive side of the East/West modules only.

**Ordering Information**

For more information on this or other products and their availability, please contact your local JDSU account manager or JDSU directly at 1-800-498-JDSU (5378) in North America and +800-5378-JDSU worldwide or via e-mail at [customer.service@jdsu.com](mailto:customer.service@jdsu.com).

**Sample: FWM-4E33SLGB2**
**FWM-4** 

Code	Device
D	4 Channel Demux
M	4 Channel Mux
E	4 Channel East
W	4 Channel West

**33S**   **B**

Code	Cassette
CS	CS cassette
LG	LGX cassette

Code	Bulkhead Connector <sup>1</sup>
2	FC/SPC
4	SC/SPC
8	ST/SPC

1. Other connectors available upon request.

Telcordia is a registered trademark of Telcordia Technologies Incorporated.

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. ©2007 JDS Uniphase Corporation. All rights reserved. 10143029 Rev.001 10/05 WDMFILTERBAND.DS.CMS.AE