
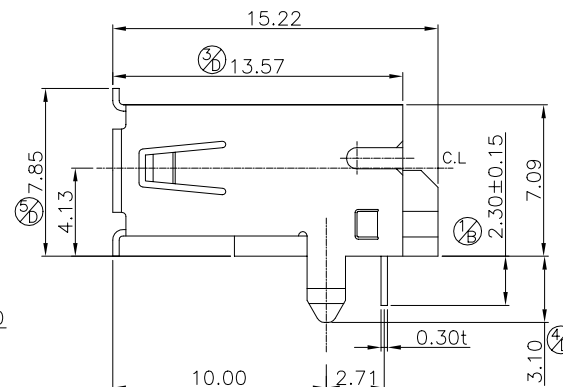
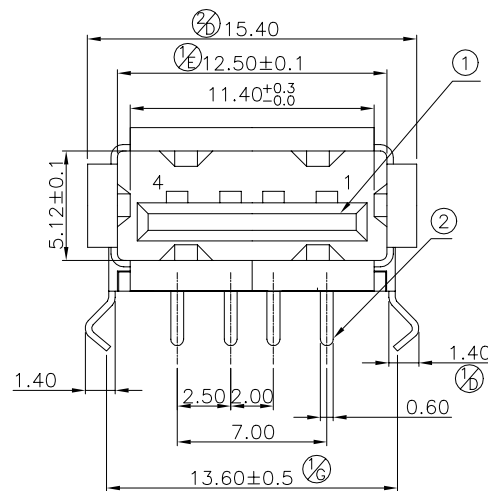


NOTE(I):


2537A-04 □□□-X
1

1. Selective plating

- 'G1T,-05u" select gold in contact/
Min. 100u" tin in solder area
'G2T,-Gold flash in contact area/
Min. 100u" tin in solder area
'G3T,-10u" select gold in contact/
Min. 100u" tin in solder area
'G4T,-15u" select gold in contact/
Min. 100u" tin in solder area
'G5T,-30u" select gold in contact/
Min. 100u" tin in solder area
'G6T,-50u" select gold in contact/
Min. 100u" tin in solder area

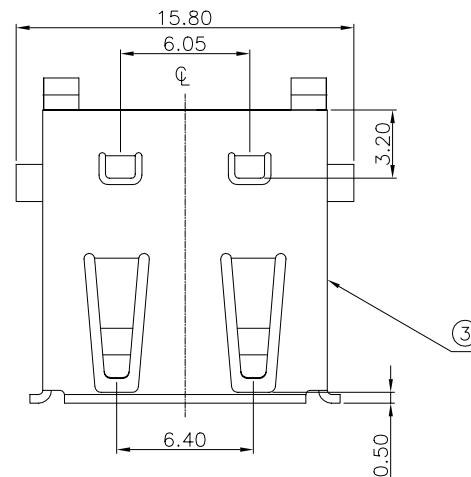

Recommended P.C.B Layout (Component Side)

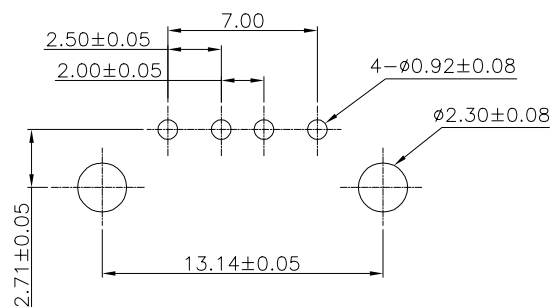

⊗	SUYIN P/NO.	鐵殼
	2537A-04GXT	亮錫
	2537A-04GXT-D	鍍



3	SHELL	Pho.Bronze	—	Tin Plated
2	TERMINAL	Pho.Bronze	—	Selective Gold/Tin
1	HOUSING	NY-6T	BLACK	UL 94V-0
NO. DESCRIPTION		MATERIAL	COLOR	REMARK

SUYIN
CONNECTOR

CUSTOMER COPY TITLE: USB CONNECTOR R/A DIP TYPE, Series A.

PART NO.				
PART NO. (OLD)		2537A-04GXT-X		
DRAWING NO.	D ING	2537A-04GXT-X		
SCALE	4:1	UNIT	mm	A4

	G		G1:13.60->13.60±0.5			Angle	±2°
	F		F1: 霧錫->亮錫	余 強	李儒平	30 ~	±0.50
ECIT-020227-01	E	02/02/27	增加標注尺寸	李碧華	宋權哲	10 ~ 30	±0.30
ECN-T010710-07	D	01/07/10	CHANGE DIMENSION	李儒平	宋權哲	~ 10	±0.15
ECN (DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	

DRAW	王淑嫻	00/06/13
DESIGN	葉聰富	00/06/13
CHECK	葉聰富	00/06/13
APPRO.	孫一翔	00/06/13