

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0357110210](#)  
**Status:** **Active**  
**Description:** 2.79mm (.110") Slip-In Tab, Quick Disconnect, 0.50mm (.020") Tab Thickness, Wire Range 16-20 AWG (1.31-0.52mm<sup>2</sup>), Post-Tin Plated

**Documents:**

[Drawing \(PDF\)](#) [Product Specification PS-35957-001 \(PDF\)](#)  
[Product Specification PS-35711-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family	Quick Disconnects
Series	<a href="#">35711</a>
Crimp Quality Equipment	Yes
Product Name	Slip-On
Type	Quick Disconnect

**Physical**

Barrel Type	Open
Gender	Male
Glow-Wire Compliant	No
Insulation	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Orientation	Straight
Packaging Type	Reel
Plating min: Mating (µm)	40
Plating min: Mating (µm)	1
Plating min: Termination (µm)	40
Plating min: Termination (µm)	1
Polarized to Mating Part	No
Tab Thickness	0.51mm (.020")
Tab Width	2.79mm (.110")
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.50-3.20mm (.060-.125") max.
Wire Size AWG	16, 18, 20
Wire Size mm <sup>2</sup>	0.50 - 1.30


**Electrical**

Voltage - Maximum	Per Wire Specification
-------------------	------------------------

**Material Info**

**Reference - Drawing Numbers**

Product Specification	PS-35711-001, PS-35957-001
Sales Drawing	SD-35711-02*0

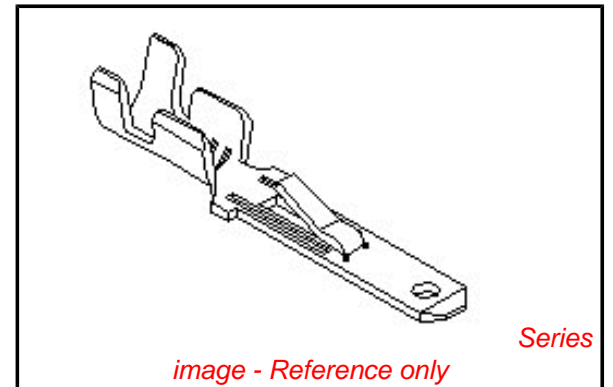

*image - Reference only*

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC**  
**Contains SVHC: No**  
**Halogen-Free Status**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
[35711Series](#)

