


HOLE PATTERN:

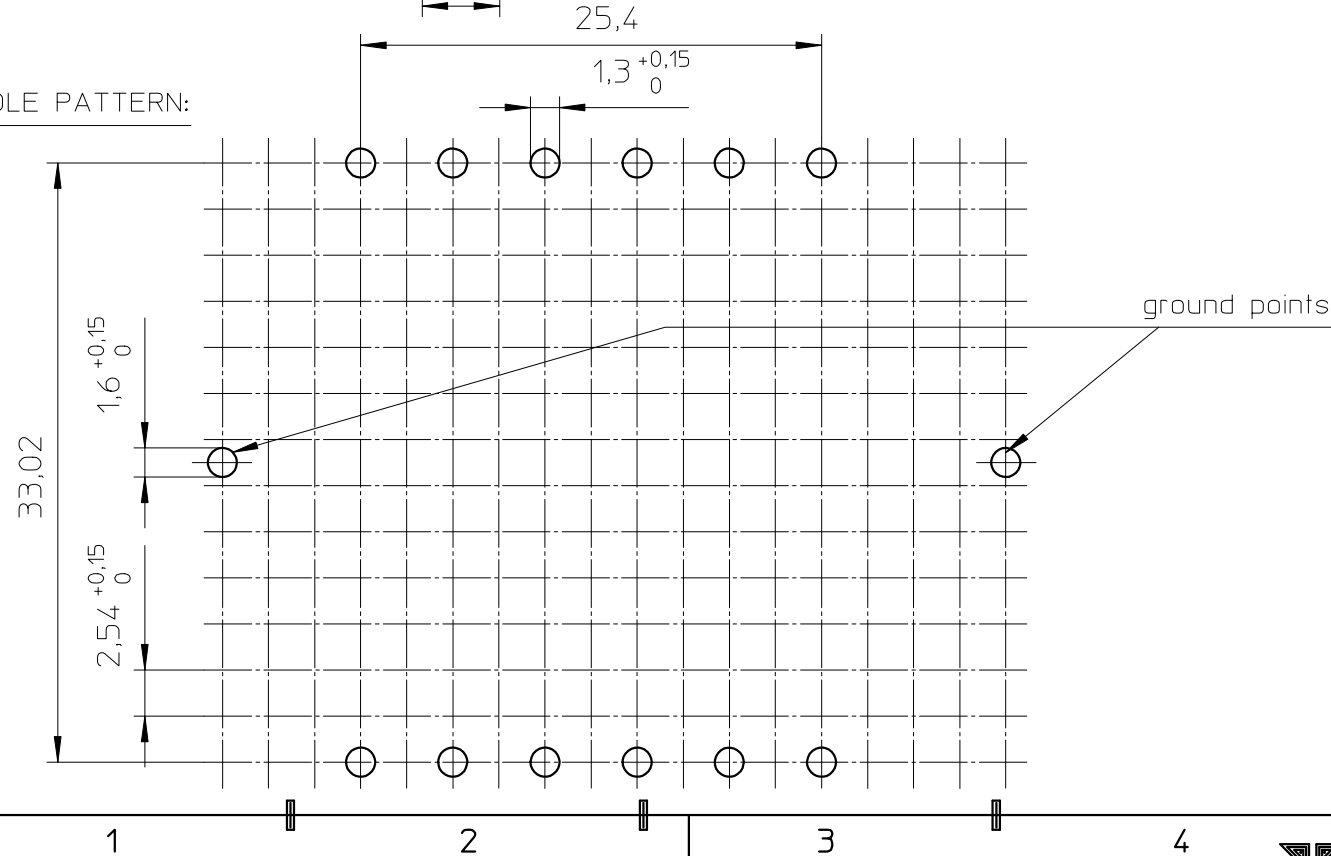

Coil former material: Valox 420SE0 (PBT), glass-reinforced.  
 UL file number: E45329(R) - UL94V-0.  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.  
 Min. winding area: 75 mm<sup>2</sup>.  
 Mean length of turn: 61 mm.

CLASS.NO.	CPV-RM12/I-1S-12PD		4322 021 3411	96-08-20
2000-03-07				99-04-26
NAME NAAM	M.Veekens	SUPERS. VERV.	001 SH SH BL BL 112 - 001	2000-03-07
MPA	CHECK CONTR.	DAT.	90-10-08	2003-07-24
		Property of Eigendom van	© FERROXCUBE 2000	2005-09-01
			069	A3