



# CHENMKO ENTERPRISE CO.,LTD

## GLASS PASSIVATED JUNCTION PLASTIC RECTIFIER

VOLTAGE RANGE 50 - 1000 Volts CURRENT 1.5 Amperes

**RL151GPT  
THRU  
RL157GPT**


Lead free devices

### FEATURES

- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- \* High reliability
- \* Low cost
- \* Low leakage
- \* Low forward voltage drop
- \* High current capability
- \* Glass passivated junction

### MECHANICAL DATA

**Case:** JEDEC DO-15 molded plastic  
**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.38 gram

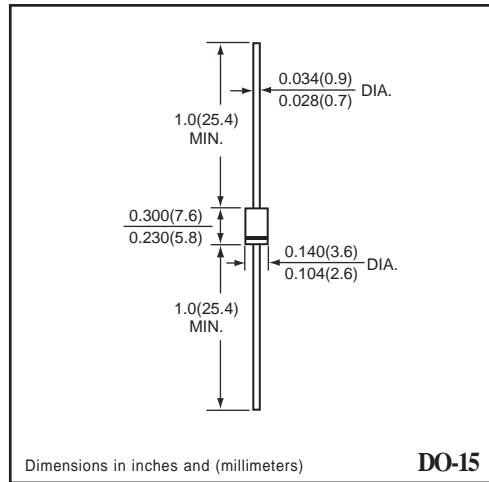

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

#### MAXIMUM RATINGS ( At TA = 25°C unless otherwise noted )

RATINGS	SYMBOL	RL151GPT	RL152GPT	RL153GPT	RL154GPT	RL155GPT	RL156GPT	RL157GPT	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at TA = 75°C	Io	1.5							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	60							Amps
Typical Junction Capacitance ( Note )	CJ	20							pF
Typical Thermal Resistance	R θJA	50							°C / W
Operating and Storage Temperature Range	TJ, TSTG	-65 to +175							°C

#### ELECTRICAL CHARACTERISTICS ( At TA = 25°C unless otherwise noted )

CHARACTERISTICS	SYMBOL	RL151GPT	RL152GPT	RL153GPT	RL154GPT	RL155GPT	RL156GPT	RL157GPT	UNITS	
Maximum Instantaneous Forward Voltage at 1.5 A DC	VF	1.1							Volts	
Maximum Reverse Current at rated	IR	50							@ TA = 25°C	uAmps
DC blocking Voltage per leg									@ TA = 100°C	uAmps
Maximum Full Load Reverse Current Average, Full Cycle 0.375" (9.5mm) lead length at TL = 75°C									30	uAmps

NOTES : Measured at 1.0 MHz and applied reverse voltage of 4.0 volts

## RATING CHARACTERISTIC CURVES ( RL151GPT THRU RL157GPT )

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

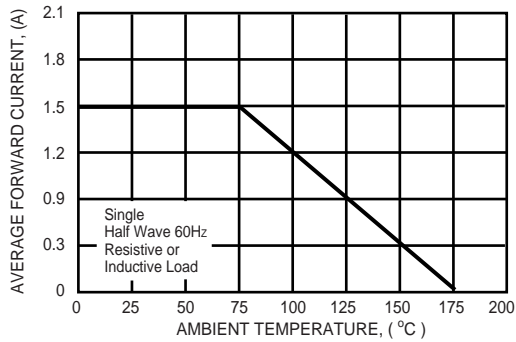


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

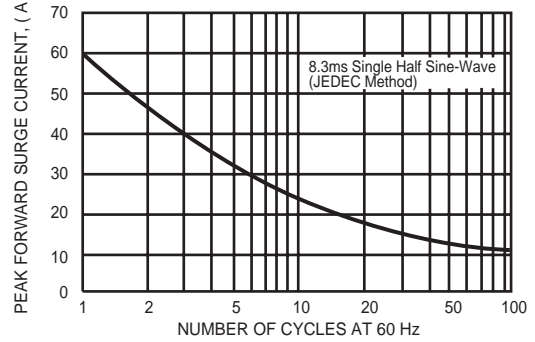


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

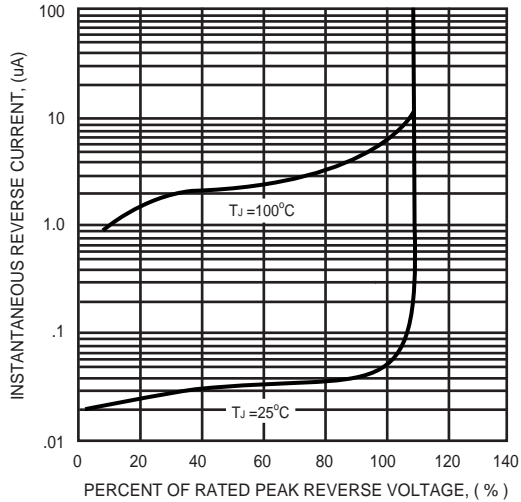


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

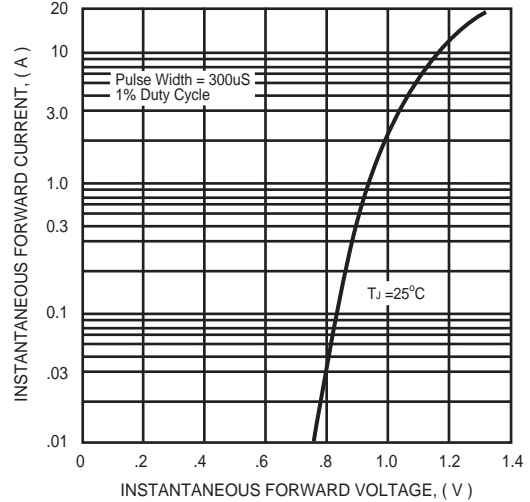


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

