

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0192070004](#)
Status: **Active**
Description: NylaKrimp™ Parallel Splice for 14-16 AWG Wire

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL E32244

General

Product Family Splices
 Series [19207](#)
 Crimp Quality Equipment Yes
 Mil-Spec N/A
 Product Name NylaKrimp™, Parallel

Physical


Barrel Type Closed - Brazed
 Flammability 94V-0
 Insulation Nylon (PA)
 Packaging Type Bag
 Wire Insulation Diameter 3.80mm (.150") max.
 Wire Size AWG 14, 16

Material Info

Old Part Number BS-N-304

Reference - Drawing Numbers

Sales Drawing SD-19207-001

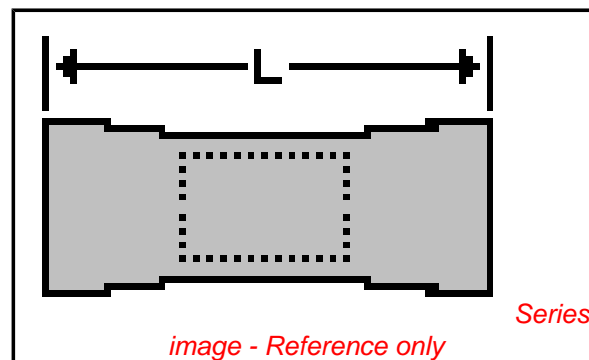

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of
 Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
 non-product compliance questions.

Search Parts in this Series

[19207Series](#)

Application Tooling | [FAQ](#)


*Tooling specifications and manuals are
 found by selecting the products below.
 Crimp Height Specifications are then
 contained in the Application Tooling
 Specification document.*

Global

Description	Product #
Hand Crimp Tool	0640010100
Hand Crimp Tool	0640010300
Hand Crimp Tool	0640016500
Crimp Head for the AT-200™ Pneumatic Hand Tool	0640050100
Crimp Head for the AT-200™ Pneumatic Hand Tool	0640050300
Crimp Head for the AT-200™ Pneumatic Hand Tool	0640056500


This document was generated on 03/16/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

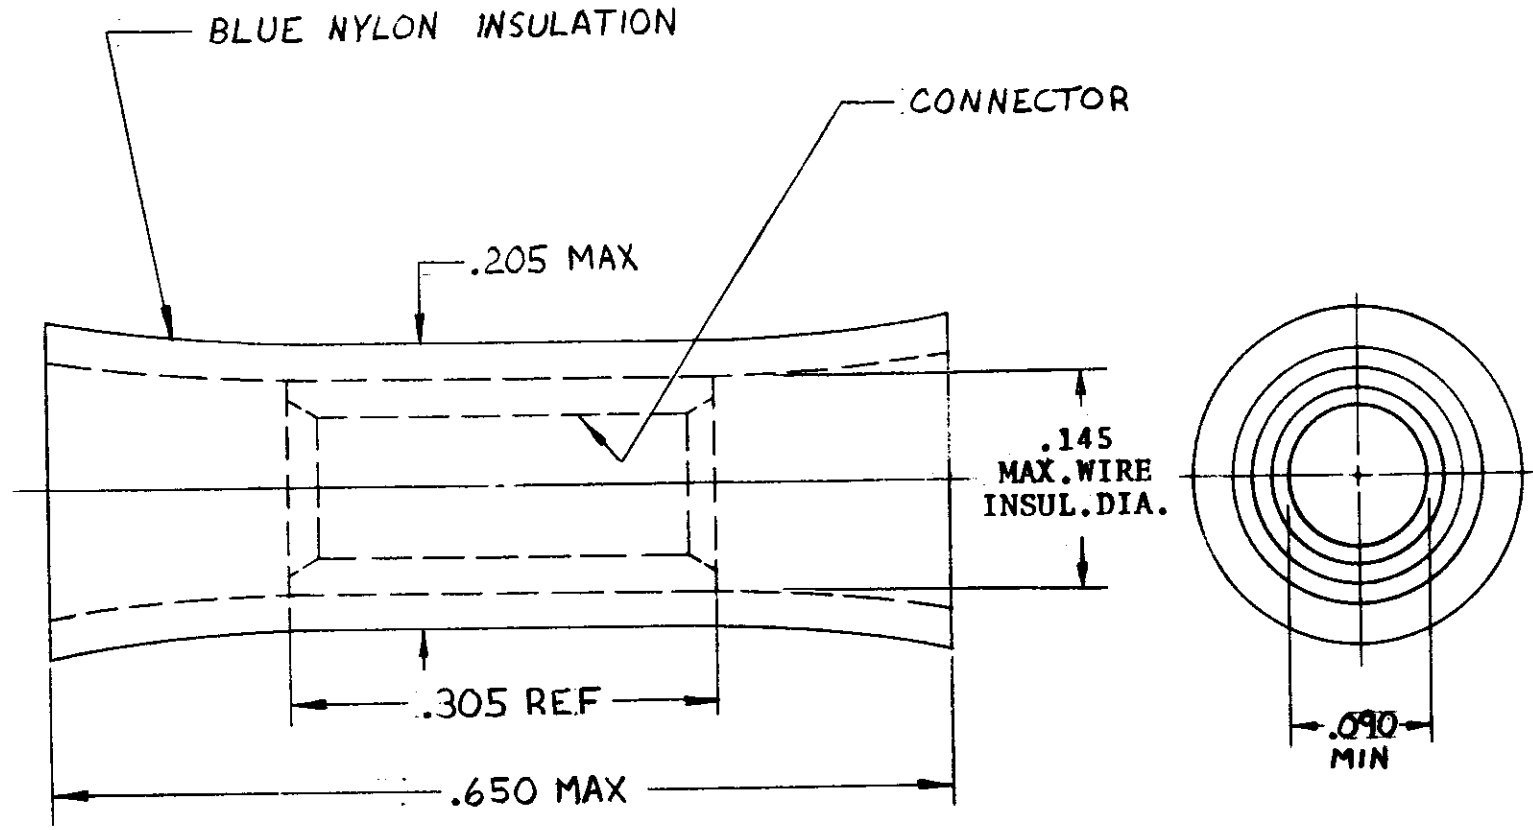

MATERIAL: COPPER
 PLATING: ELECTRO TIN

WIRE SIZE: 16-14 AWG

 INCORPORATED CLEVELAND, OHIO	TITLE: ASS'Y. DWG. NYLON INSULATED SPLICE	DIMENSIONAL TOLERANCE UNLESS OTHERWISE SPECIFIED			REVISION SCALE: \sim DRWN. BY: JTK CHKD. BY: APPRD. BY: DRAWING NO.: BS-N-304	DATE 3-24-71
		FRAC.	DEC.	ANG.		
		±	±	±		