

FEATURES

- 15 WATTS MAXIMUM OUTPU POWER
- SINGLE OUTPUT UP TO 4A
- SMALL SIZE AND LOW PROFILE : 1.10 x 0.94 x 0.34 INCH
- HIGH EFFICIENCY UP TO 87%
- 4:1 ULTRA WIDE INPUT VOLTAGE RANGE
- FIXED SWITCHING FREQUENCY
- INPUT TO OUTPUT ISOLATION (BASIC INSULATION)
- INDUSTRY STANDARD PIN-OUT FEC15 SERIES COMPATIBLE
- SURFACE-MOUNT OR THROUGH-HOLE
- COST EFFICIENT OPEN FRAME DESIGN
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

OPTIONS

Positive logic Remote On/Off, SMD type, Without trim, without On/Off pin

DESCRIPTION

LED15W single output DC/DC converters provide up to 15 watts of output power in an industry standard package and footprint. These units are specifically designed to meet the power needs of low profile. All models feature with 4:1 ultra wide input voltage of 9-36 VDC and 18-75 VDC, comprehensively protected against over-current, over-voltage and input under-voltage protection conditions, and trimmable output voltage.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS		INPUT SPECIFICATIONS			
Output power	15 Watts	Input voltage range	24V nominal input 48V nominal input	9 – 36VDC 18 – 75VDC	
Voltage accuracy	Full load and nominal Vin	± 1%	Input surge voltage	24V input 100mS max	50VDC 100VDC
Minimum load		0%	Input reflected ripple current	Nominal Vin and full load	30mA _{p-p}
Voltage adjustability (Note 6)		±10%	Start up time	Nominal Vin and constant resistive load	30mS, max. Power up Remote ON/OFF
Line regulation	LL to HL at Full Load	± 0.2%	Start-up voltage	24V input 48V input	9VDC 18VDC
Load regulation	No Load to Full Load	± 0.2%	Shutdown voltage	24V input 48V input	8VDC 16VDC
Ripple and noise	20MHz bandwidth (Measured with a 1µF M/C and a 10µFT/C)	See table	Remote ON/OFF (Note 7)	DC-DC ON DC-DC OFF	Open or 3 V < Vr < 15V Short or 0V < Vr < 1.2V
Temperature coefficient		±0.02% / °C, max.	Positive logic(Option)	DC-DC ON DC-DC OFF	Short or 0V < Vr < 1.2V Open or 3V < Vr < 15V
Transient response recovery time	25% load step change	250µS	Negative logic(Standard)	DC-DC ON DC-DC OFF	Open or 3V < Vr < 15V
Over voltage protection (Voltage clamped)	3.3V output 5V output 12V output 15V output	3.7VDC-5.4VDC 5.6VDC-7.0VDC 13.8VDC-17.5VDC 16.8VDC-20.5VDC	Input current of remote control pin	Nominal Vin	-0.5mA~1.0mA
Over load protection	% of FL at nominal input	150%,typ.	Remote off state input current	Nominal Vin	2.5 mA
Short circuit protection		Hiccup, automatics recovery			
GENERAL SPECIFICATIONS					
Efficiency		See table	ENVIRONMENTAL SPECIFICATIONS		
Isolation voltage	Input to Output (Basic Insulation)	2250VDC, min.	Operating ambient temperature	-40°C to +85°C (with derating)	
Isolation resistance		10 ⁹ ohms, min.	Storage temperature range	-55°C ~ +125°C	
Isolation capacitance		1500pF, max.	Thermal shock	MIL-STD-810F	
Switching frequency	3.3V,5V 12V,15V	350KHz 400KHz	Vibration	MIL-STD-810F	
Approvals and standard	IEC60950-1, UL60950-1, EN60950-1		Relative humidity	5% to 95% RH	
Dimensions	1.10 X 0.94 X 0.34 Inch (27.9 X 23.9 X 8.5 mm)		EMC CHARACTERISTICS		
Weight	10.5g(0.36oz)		EMI (Note 8)	EN55022	
MTBF (Note 1)	BELLCORE TR-NWT-000332 MIL-HDBK-217F	1.322x10 ⁶ hrs 5.147x10 ⁵ hrs	Radiated immunity	10 V/m	Class A
			Fast transient (Note 9)	± 2KV	Perf. Criteria A
			Surge (Note 9)	± 1KV	Perf. Criteria A
			Conducted immunity	3 Vr.m.s	Perf. Criteria A





**POWER MATE
TECHNOLOGY CO.,LTD.**



15 WATTS DC-DC CONVERTER

Model Number	Input Range	Output Voltage	Output Current		Output ⁽⁴⁾ Ripple & Noise	Input Current		Eff ⁽⁴⁾ (%)	Capacitor Load max
			Min. Load	Full Load		No Load ⁽³⁾	Full Load ⁽²⁾		
LED15-24S3P3W	9 - 36 VDC	3.3 VDC	0mA	4000mA	100mVp-p	60mA	680mA	85	1000µF
LED15-24S05W	9 - 36 VDC	5 VDC	0mA	3000mA	100mVp-p	70mA	754mA	87	1000µF
LED15-24S12W	9 - 36 VDC	12 VDC	0mA	1300mA	100mVp-p	10mA	793mA	86	330µF
LED15-24S15W	9 - 36 VDC	15 VDC	0mA	1000mA	100mVp-p	10mA	763mA	86	220µF
LED15-48S3P3W	18 - 75 VDC	3.3 VDC	0mA	4000mA	100mVp-p	40mA	340mA	85	1000µF
LED15-48S05W	18 - 75 VDC	5 VDC	0mA	3000mA	100mVp-p	40mA	377mA	87	1000µF
LED15-48S12W	18 - 75 VDC	12 VDC	0mA	1300mA	100mVp-p	10mA	397mA	86	330µF
LED15-48S15W	18 - 75 VDC	15 VDC	0mA	1000mA	100mVp-p	10mA	382mA	86	220µF


Note

1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment)
2. Maximum value at nominal input voltage and full load.
3. Typical value at nominal input voltage and no load.
4. Typical value at nominal input voltage and full load.
5. Test by minimum Vin and constant resistive load.
6. Trimming allows the user to increase or decrease the output voltage set point of the module. This is accomplished by connecting an external resistor between the TRIM pin and either the +VOUT pin or the -VOUT pin.
7. The ON/OFF control pin voltage is reference to -Vin. The order number please see product standard table.
8. The LED15W meets EN55022 class A and class B only with external components connected before the input pin to the converter.
9. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220µF/100V, ESR 48mΩ.

DIP TYPE

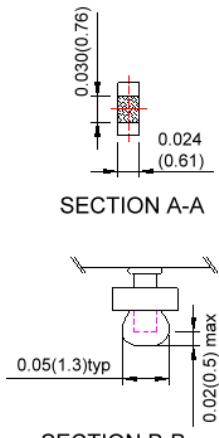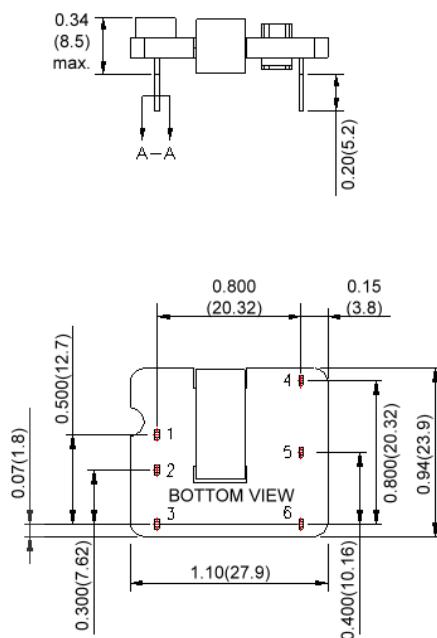

SMD TYPE

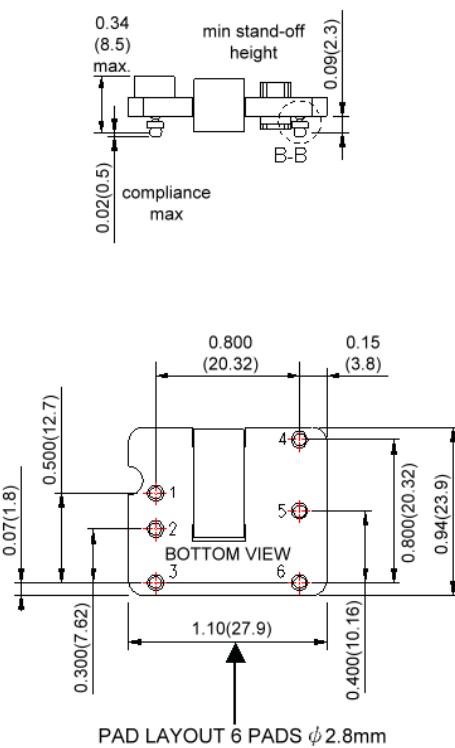


1. All dimensions in Inches (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance $\pm 0.01(0.25)$
3. Pin dimension tolerance $\pm 0.004 (0.1)$

PIN CONNECTION	
PIN	LED15W SERIES
1	+ INPUT
2	- INPUT
3	ON/OFF
4	+VOUT
5	TRIM
6	-VOUT

EXTERNAL OUTPUT TRIMMING




Output can be externally trimmed by using the method shown below.



PRODUCT STANDARD TABLE

Option	Suffix
Negative remote ON/OFF with DIP(Standard)	
Negative remote ON/OFF with SMT	-A
Positive remote ON/OFF with DIP	-B
Positive remote ON/OFF with SMT	-C
DIP type without ON/OFF pin	-D
SMT type without ON/OFF pin	-E
DIP type,negative remote ON/OFF without TRIM pin	-F
SMT type,negative remote ON/OFF without TRIM pin	-G
DIP type without ON/OFF&TRIM pin	-H
SMT type without ON/OFF&TRIM pin	-I
DIP type,positive remote ON/OFF without TRIM pin	-J
SMT type,positive remote ON/OFF without TRIM pin	-K





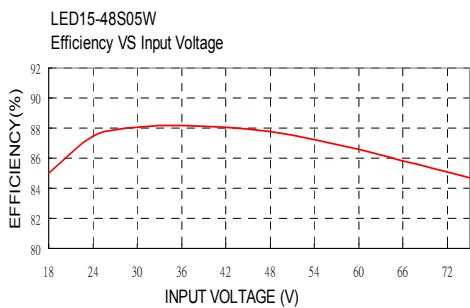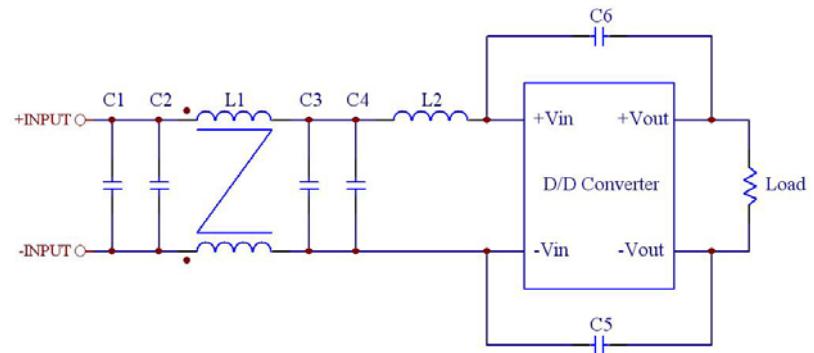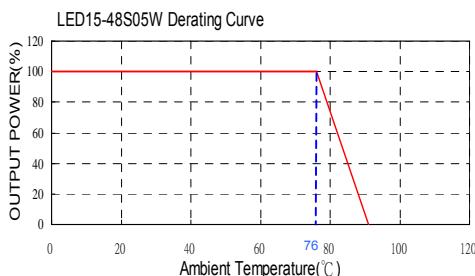

Recommended Filter for EN55022 Class B Compliance

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

	C1	C2 & C3 & C4	C5 & C6	L1	L2
LED15-24xxxW	N/A	6.8μF/50V 1812 MLCC	470pF/3KV 1808 MLCC	145μH Common Choke PMT-051	10μH SMD Inductor PMT-070
LED15-48xxxW	2.2μF/100V 1812 MLCC	2.2μF/100V 1812 MLCC	470pF/3KV 1808 MLCC	325μH Common Choke PMT-050	33μH SMD Inductor PMT-069

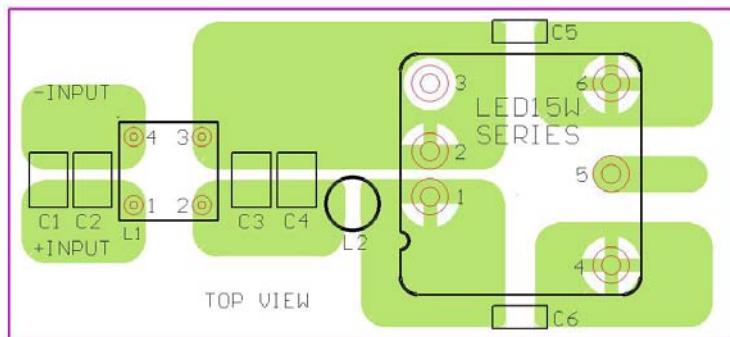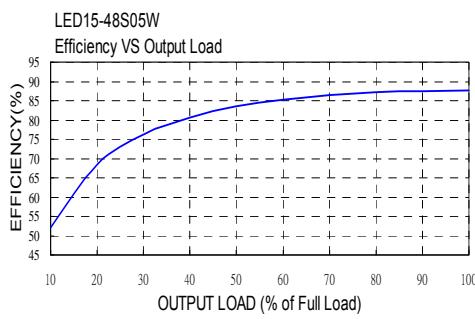

Recommended EN55022 Class B Filter Circuit Layout

